

intenza



CABLE STATIONS AND MACHINE OWNER'S MANUAL
INTENZA SEATED ROW CMS—T4—SR

Table of Contents

1	IMPORTANT SAFETY INSTRUCTIONS	2
1.1	Important Safety Guidelines For Owners	2
1.2	Important Safety Information For Users	3
1.3	Label Locations	4
2	INSTALLATION AND ASSEMBLY	5
2.1	Product Information	5
2.2	Place Of Installation	12
2.3	Assembly Guide	13
3	CARE AND MAINTENANCE	20
3.1	Commerical Maintenance Schedule	20
3.2	Daily Inspection&Maintenance	21
3.3	Weekly Inspection&Maintenance	21
3.4	Other Scheduled Preventive Maintenance	22
3.5	Cleaning The Equipment	22
3.6	Cable Inspection&Maintenance	23

IMPORTANT SAFETY INSTRUCTIONS

It is the sole responsibility of the purchaser of Intenza products to instruct all individuals, whether they are the end user or supervising personnel on proper usage of the equipment.

It is recommended that all users of Intenza exercise equipment be informed of the following information prior to its use.

1.1 Important Operation Instructions for Owners

Follow these guidelines to maintain proper working condition of the equipment—

IMPORTANT Do not modify the equipment or any of its parts, or permanently remove any part from the equipment. Do not use accessory attachments that are not recommended by Intenza, as such attachments might cause injuries.

- Before getting started with the machine assembly, please read through this manual.
- Qualified technicians must perform all regular maintenance.
- Do not remove warning labels for any reason. They contain important information. If unreadable or missing, contact your Intenza dealer for a replacement.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected.
- Make sure that trainers, facility personnel, and maintenance technicians understand how to use the equipment, know important safety guidelines, and can recognize potential problems such as loose hardware, or cracked weld. If any staff member witnesses unsafe use of the equipment, he or she should address the user directly, demonstrate the proper technique, and review the Important Safety Information for Users.
- Intenza recommends posting a copy of the Important Safety Information for Users near the equipment in a prominent location.
- Place an “out—of—order” sign on the equipment during maintenance of the equipment or the surrounding area. Users should never be allowed to operate the equipment until it has been inspected and works properly. If a piece of equipment needs service, keep it out of use until it is repaired. Place an “out—of—order” sign on the equipment and make sure the facility’s personnel know not to allow anyone to use the equipment until it is working properly.
- When working with the weight stacks, do not attempt to free any jammed assemblies without assistance as this may cause injury.
- NEVER use this machine with the weight stack pinned in an elevated position.
- Do not place the equipment outdoors or on wet surfaces.

1.2 Important Safety Instructions For Users

Read all instructions before using the equipment. These instructions were written to ensure your safety and to protect the equipment. Equipment is intended for commercial use.

Before beginning any fitness program, you should obtain a complete physical examination from your physician.


When using exercise equipment, you should always take basic precautions, including the following—

- If you do not understand how to operate a piece of equipment, ask someone from the facility such as a trainer to demonstrate how to use it and explain any safety instructions.
- Do not allow children on or near the equipment. Do not leave children unsupervised around the equipment.
- Use the equipment only for its intended purpose. Do not use accessory attachments that are not recommended by the manufacturer, as such attachments may cause injuries.
- Wear proper exercise clothing and shoes during a workout: no garments that impede perspiration and no loose clothing. Tie long hair back. Keep garments or towels away from moving parts.
- Do not overexert yourself or work to exhaustion. Use reasonable judgment when working with weights. Avoid using excessive weight, which may cause injury.
- If you feel pain, faintness, dizziness, or abnormal symptoms, stop exercising immediately and consult your physician.
- Keep head, limbs, fingers, and hair clear of all moving parts while the equipment is in use. Keep hands clear of racking pegs.
- Never drop or insert objects into any opening in the equipment.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected. Pay particular attention to the condition of cables and cable ends. If you notice a loose cable end or any fraying of the cable or cable jacket, do not use the product and contact someone in the facility immediately."
- Always check the equipment before using it. If you spot a potential problem, contact someone in the facility immediately. Do not use the equipment until the facility has verified that the equipment is working properly. Do not attempt to fix broken or jammed equipment.
- Do not use the equipment outdoors or on wet surfaces.
- Do not drop or slam the weight stack while exercising.
- Be sure the selector pin is completely inserted. Use only the pin provided by the manufacturer. If unsure, contact someone in the facility.
- Never pin the weights in an elevated position. Do not use the equipment if the top plate or weight stack is pinned in a raised position. Notify the facility's personnel to repair the equipment and ensure that it is working properly.

1.3 Warning Label Locations

WARNING

During all operations involving transport, maintenance and cleaning, pay attention to any part of the equipment where body parts may become trapped. Attention must be paid to the labels attached to the equipment, as they provide information about possible risks and hazards. We recommend immediately replacing the labels when they become damaged or difficult to read.

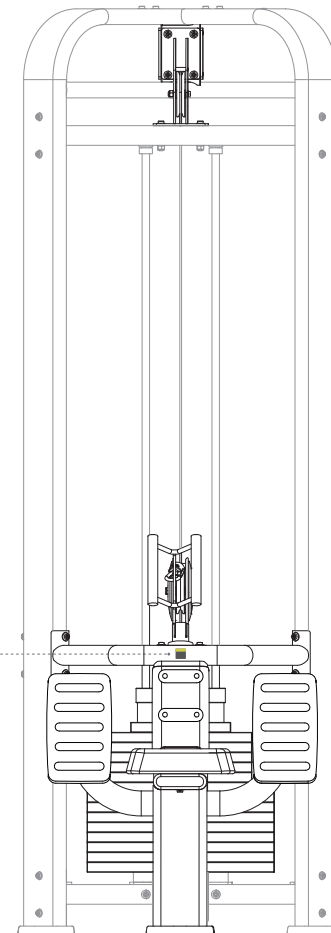

2. Installation

2.1 Product Information

The Cable Station Line is a unique concept allowing a lot of different configurations to enable top-notch functional training.

The configurations are:

Stand-alone 4-way Tower (CMS—T4) with 4 workout stations.

A connection of 2 or more 4-way Tower (CMS—T4) by using Cross Beams (CMS—T4—CB).

A connection of 1 4-way Tower (CMS—T4) and 1 Adjustable Pulley Station (CMS—APS) by using Cross Beams (CMS—T4—CB).

A connection of 2 Adjustable Pulley Stations (CMS—APS) to create an adjustable cross-over station (with a CMS—T4—CB).




MODEL NUMBER	CMS—COM1	CMS—COM2	CMS—COM3	CMS—COM4	CMS—COM5
CMS—T4	1		1	2	2
CMS—T4—SR	1		1	2	2
CMS—T4—TP	1		1	2	1
CMS—T4—LP	1		1	2	2
CMS—T4—AP	1		1	2	3
CMS—APS		2	1		1
CMS—T4—CB		1	1	1	2

2.1 Product Information

ASSEMBLY DIMENSIONS

MODEL NUMBER	CMS—COM1				
LENGTH	362 cm	143 inches	LIVE AREA SR	251 x 175 cm	99 x 69 inches
WIDTH	224 cm	88 inches	LIVE AREA TP	175 x 145 cm	69 x 57 inches
HEIGHT	236 cm	92.9 inches	LIVE AREA LP	205 x 150 cm	81 x 59 inches
			LIVE AREA AP	304 x 189 cm	120 x 75 inches

LIVE AREA


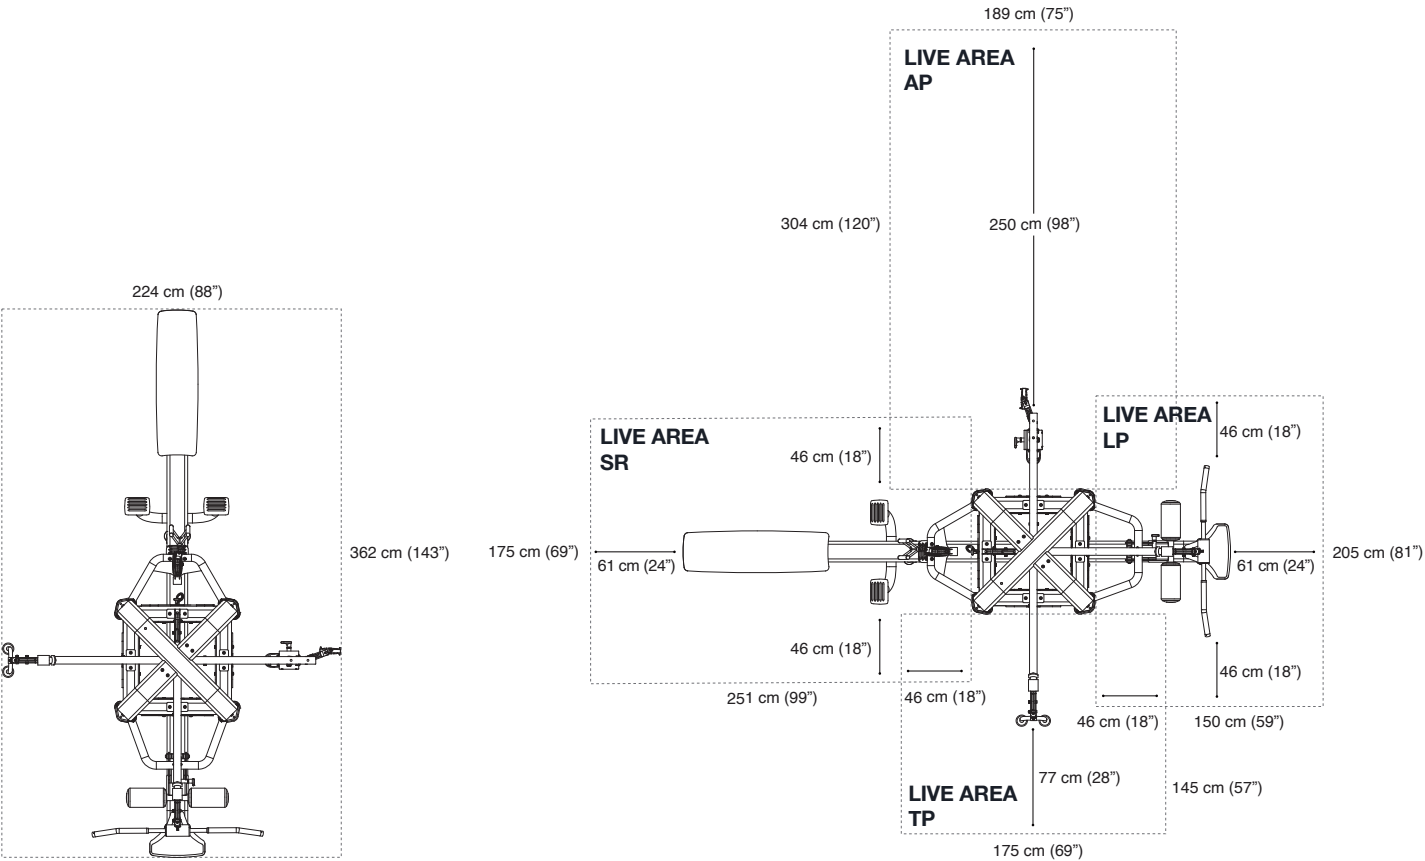


2.1 Product Information

ASSEMBLY DIMENSIONS

MODEL NUMBER	CMS—COM2			
LENGTH	440 cm	173 inches	LIVE AREA	500 x 230 x 282 cm 287 x 91 x 111 inches
WIDTH	71cm	28 inches		
HEIGHT	235 cm	92.5 inches		

LIVE AREA

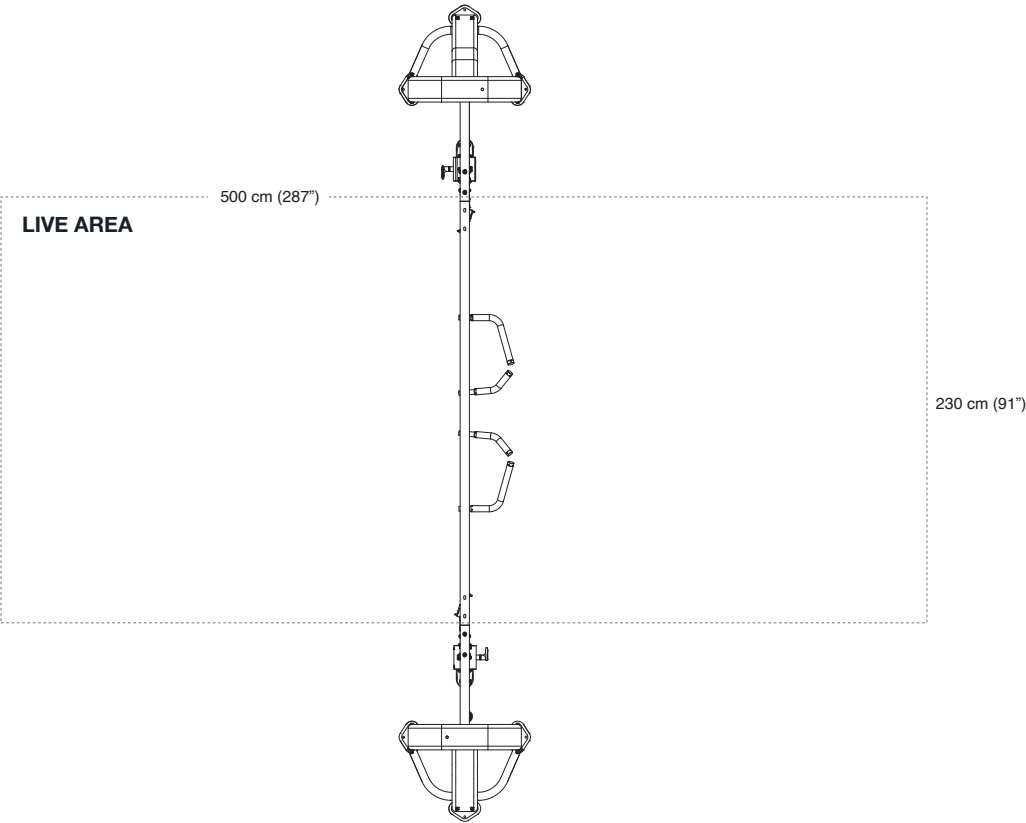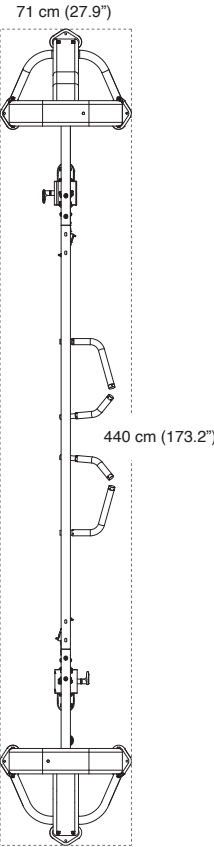


2.1 Product Information

ASSEMBLY DIMENSIONS

MODEL NUMBER	CMS—COM3				
LENGTH	541 cm	213 inches	LIVE AREA SR	251 x 175 cm	99 x 69 inches
WIDTH	363 cm	143 inches	LIVE AREA TP	175 x 145 cm	69 x 57 inches
HEIGHT	236 cm	93 inches	LIVE AREA LP	205 x 150 cm	81 x 59 inches
			LIVE AREA 2 X AP	500 x 230 x 282 cm	287 x 91 x 111 inches

LIVE AREA

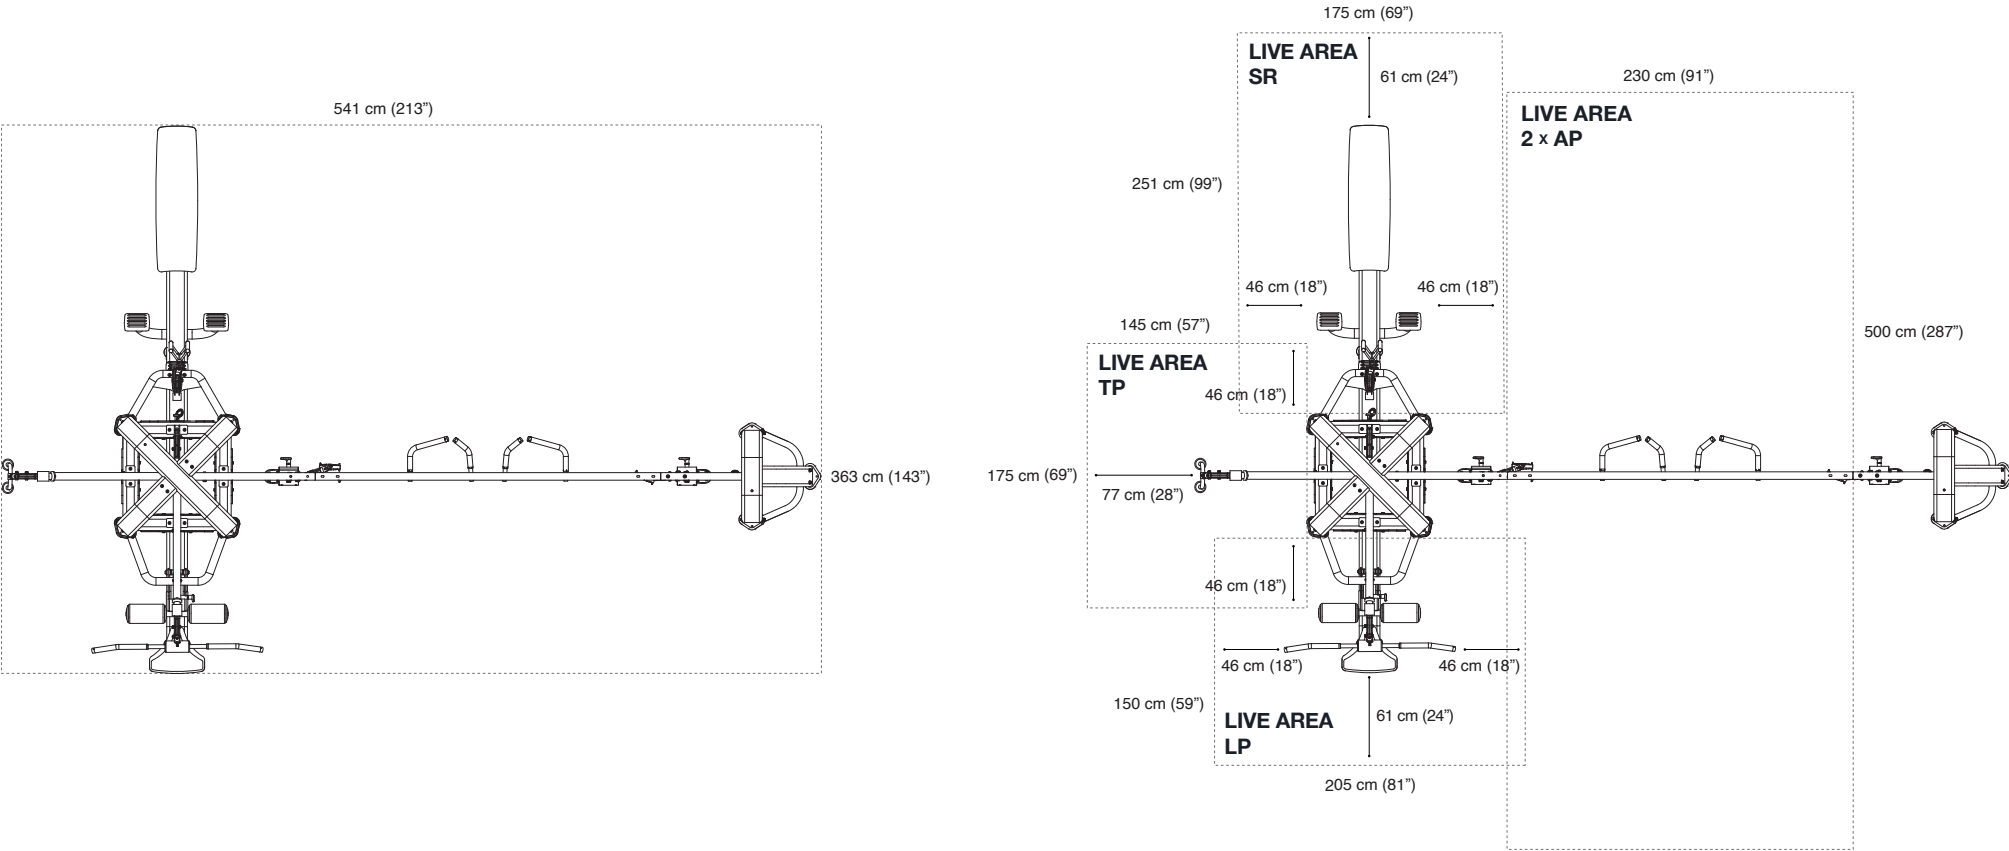


2.1 Product Information

ASSEMBLY DIMENSIONS

MODEL NUMBER	CMS—COM4				
LENGTH	642 cm	253 inches	LIVE AREA SR	251 x 175 cm	99 x 69 inches
WIDTH	464 cm	183 inches	LIVE AREA TP	175 x 145 cm	69 x 57 inches
HEIGHT	236 cm	93 inches	LIVE AREA LP	205 x 150 cm	81 x 59 inches
			LIVE AREA 2 X AP	500 x 230 x 282 cm	287 x 91 x 111 inches

LIVE AREA

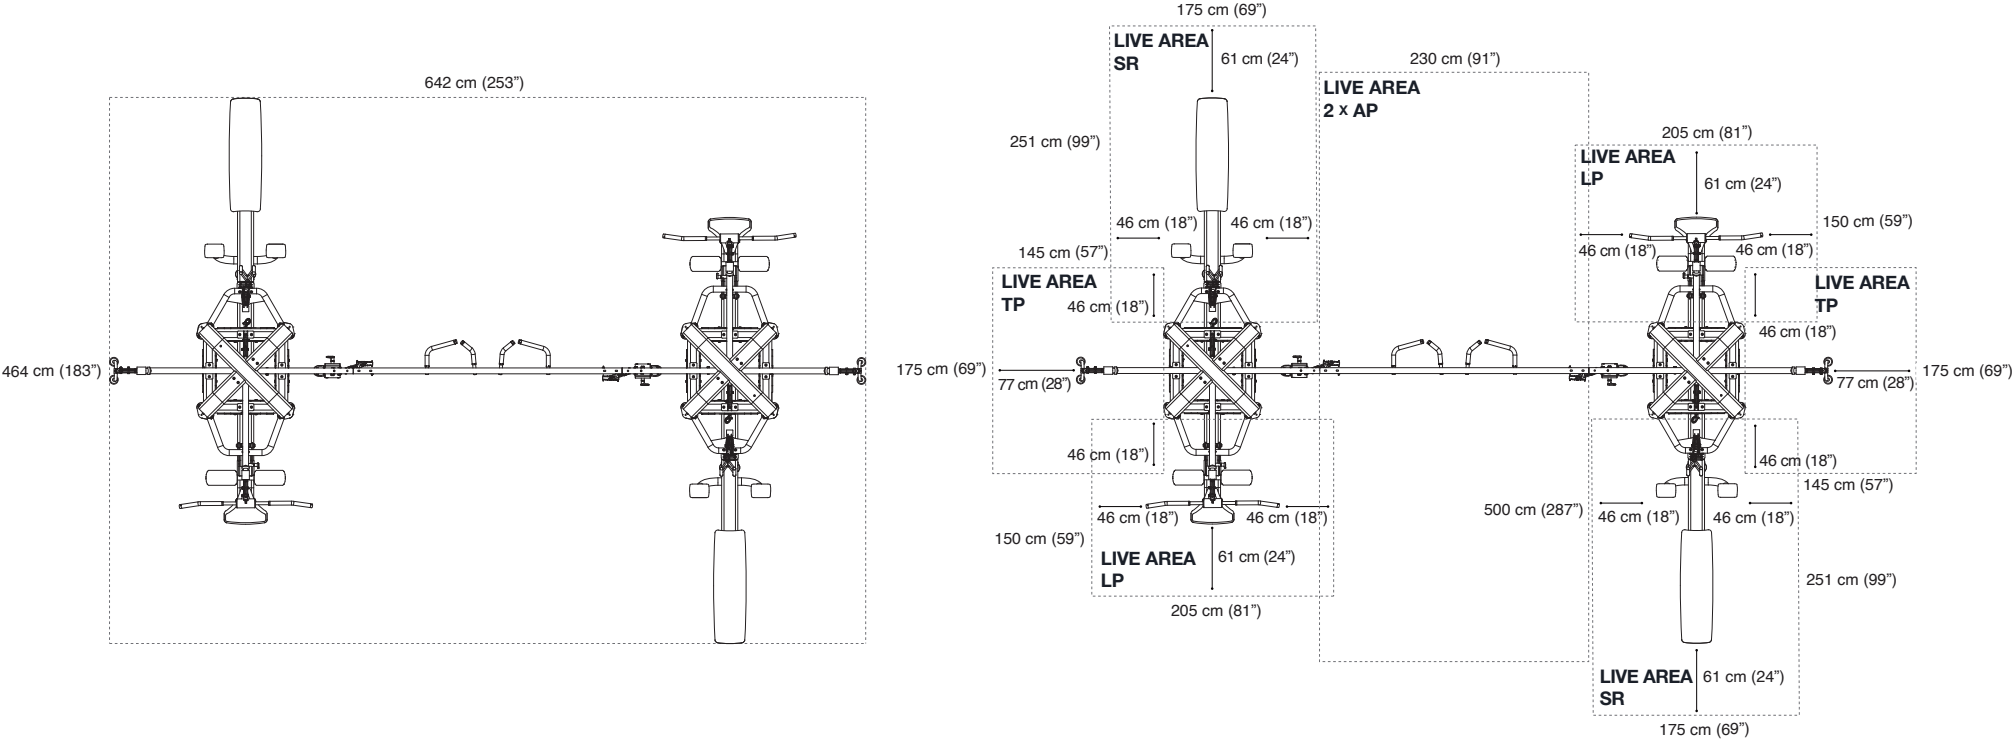


2.1 Product Information

ASSEMBLY DIMENSIONS


MODEL NUMBER	CMS—COM5				
LENGTH	657 cm	259 inches	LIVE AREA	SR	251 x 175 cm 99 x 69 inches
WIDTH	657 cm	259 inches	LIVE AREA	TP	175 x 145 cm 69 x 57 inches
HEIGHT	236 cm	93 inches	LIVE AREA	LP	205 x 150 cm 81 x 59 inches
			LIVE AREA	AP+APS	570 x 230 x 282 cm 224 x 91 x 111 inches

LIVE AREA

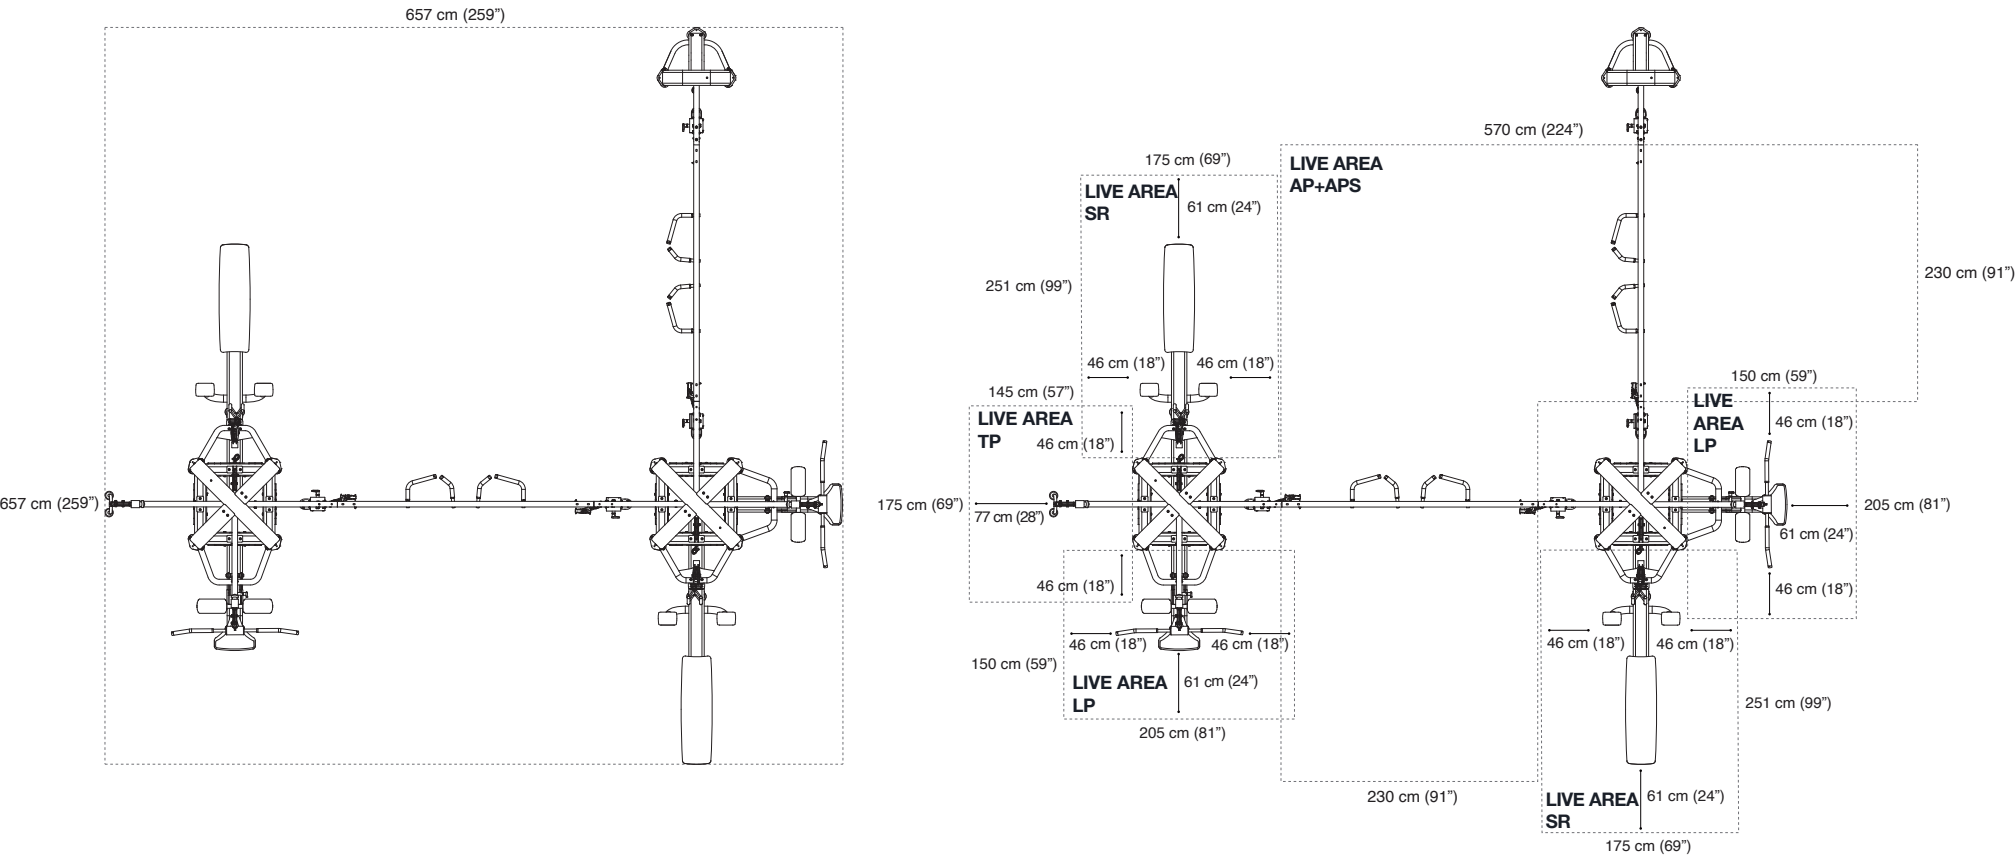


2.1 Product Information

SERIAL NUMBER LABEL LOCATION		ASSEMBLY DIMENSIONS		
A	Manufacturer's name	MODEL NUMBER	SEATED ROW CMS—T4—SR	
B	Model number	LENGTH	273 cm	107 inches
C	Serial number	WIDTH	83 cm	33 inches
D	Consultation of user manual required	HEIGHT	236 cm	93 inches
		LIVE AREA	334 x 175 cm	131 x 69 inches

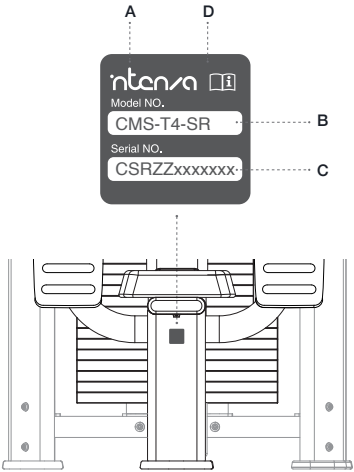

LIVE AREA

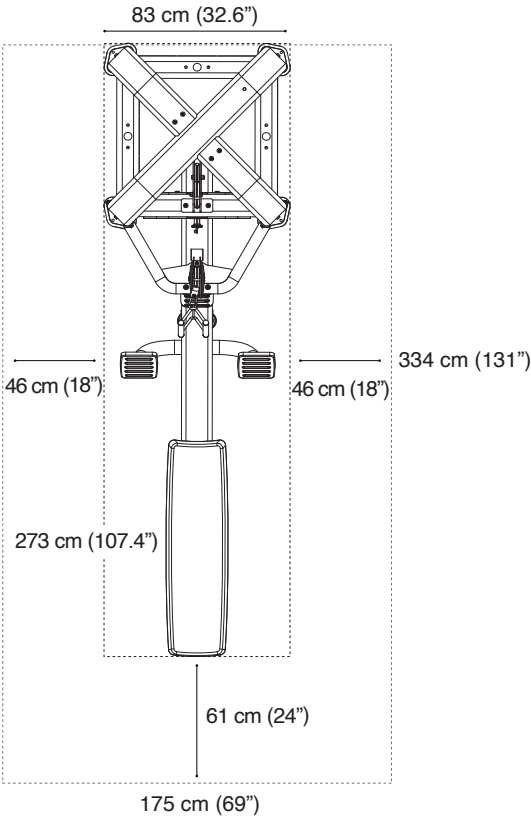

2.2 Place of Installation

To ensure safe, comfortable and effective use of the equipment, the place of installation must comply with certain specific requirements. In particular, before choosing where to install the equipment we recommended that you check that the following conditions are available—

- A temperature between +10°C and +25°C.
- Sufficient ventilation to maintain a humidity level between 20% and 90%, when the equipment is in use.
- Sufficient lighting to make the area a safe and relaxing place to exercise.
- Sufficient clearance on all sides of the equipment, taking into account its maximum dimensions when in use, to ensure safety.
- A flat, stable and vibration-free floor surface, with sufficient load bearing capacity for the equipment's weight.
- If the equipment is to be installed in a public recreation area, the place of installation must comply with all the requirements of the regulations currently in force.

WARNING

The equipment must be installed and used in a place where access and supervision are specifically controlled by the owner. When installing the equipment, use suitable personal protective equipment. To avoid any injury it is strongly recommended to assemble this product with 2 persons.

2.3 Assembly Guide

UNPACKING

Thank you for purchasing an Intenza product. Your Intenza product is inspected before it is packaged. It is shipped in multiple pieces to facilitate the compact packaging of the machine. Prior to assembly, confirm all the components by matching them with the exploded diagrams. Carefully unpack the unit from this box and dispose of the packing materials in accordance with your local laws.

CAUTION


The weight of the product is heavy. To avoid injury to yourself and prevent damage to the frame components, be sure to have proper assistance removing the frame pieces from this box. Please be sure to install the equipment on a stable base, properly level the machine and leave at least two feet of clearance to enter and exit the machine.

2.3 Assembly Guide


TOOLS




1. Allen Wrench, 4mm, 5mm, 6 mm




2. 9/16" Socket Wrench/
Adjustable Wrench




3. Rubber Mallet




4. Tape Measure



1. 3/8" Flat Washer
QTY 25



2. Lock Nut 3/8" x 11t
QTY 7




3. Guide Rod Holder Assembly
QTY 1




4. Row Base Assembly
QTY 1




5. Guide Rod
QTY 2



6. Weight Stack Cushion
QTY 2




7. Guide Rod Collar
QTY 2




8. Head Plate Assembly
QTY 1



9. Set Screws
5/16"—18UNCX1/4"L—A8
QTY 2




10. 15lb Weight Plate
QTY 5




11. 20lb Weight Plate
QTY 9

PART LIST


2.3 Assembly Guide

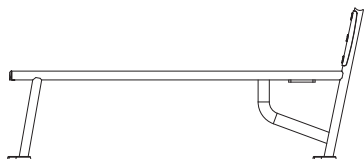


12. Seat Frame
QTY 1

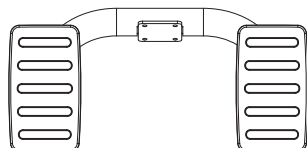


13. Foot Rest Assembly
QTY 1




14. Triangle Handle
QTY 1

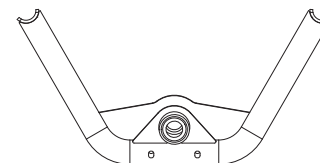

15. Connecting Tube
QTY 1

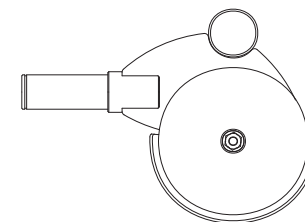


16. Swivel Pulley
QTY 1




17. 4 1/2" Pulley
QTY 3




18. Rubber Bushing
QTY 1



19. U Bracket
QTY 1

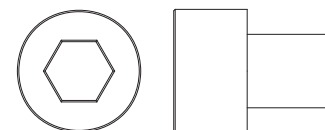


20. Shoulder Bolt
QTY 2

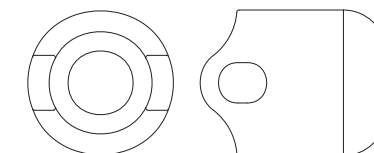


21. Cable Plastic Housing
QTY 1




22. Flatoval End Cap
QTY 1




23. Cap Head Screw 3/8" x 1 55mmL
QTY 4



24. Cap Head Screw 3/8" x 1 61mmL
QTY 2




**25. Cap Head Screw 3/8" x 2 3/4"L
With Blue Patch**
QTY 4




**26. Cap Head Screw 3/8" x 2 1/2"L
With Blue Patch**
QTY 5


2.3 Assembly Guide




**27. Cap Head Screw 3/8" x 2"L
With Blue Patch
QTY 2**




**28. Cap Head Screw 3/8" x 2"L
QTY 3**




**29. Cap Head Screw 3/8" x 3/4"L
With Blue Patch
QTY 8**




**30. Curved Washer
QTY 14**




**31. Lock Nut 3/8" x 7.2t
QTY 4**

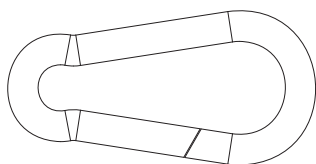


**32. Snap Hook
QTY 1**



**33. C Clip
QTY 1**



**34. Cap Head Screw 3/8" x 4 1/2"L
QTY 2**



**35. Seat Pad
QTY 1**

2.3 Assembly Guide

STEP 1

ATTACH THE GUIDE ROD HOLDER ASSEMBLY (3) TO THE MAIN TOWER UPPER FRAME.

COMPONENTS

Cap Head Screws $\frac{3}{8}$ " x $\frac{3}{4}$ " L (29),
 $\frac{3}{8}$ " Flat Washers (1)

STEP 2

ATTACH THE ROW BASE ASSEMBLY (4) TO THE MAIN TOWER.

COMPONENTS

Cap Head Screws $\frac{3}{8}$ " x $2\frac{1}{2}$ " L (26),
 $\frac{3}{8}$ " Flat Washers (1)

STEP 3

PLACE AND ALIGN WEIGHT STACK CUSHION (6) OVER EACH HOLE OF MAIN TOWER LOWER FRAME. INSERT 2 GUIDE RODS (5) EACH THROUGH WEIGHT STACK CUSHION INTO THE HOLES OF MAIN TOWER LOWER FRAME.

SLIGHTLY ANGLE FORWARD THE 2 GUIDE RODS AND CAREFULLY INSTALL 9 OF 20LB WEIGHT PLATES (11) AND 5 OF 15LB WEIGHT PLATES (10) ON THE GUIDE.

RODS MAKING SURE THE SELECTOR PIN HOLE FACES FORWARD.

INSTALL THE TOP WEIGHT ASSEMBLY (8) ON THE GUIDE RODS MAKING SURE THE HEAD OF THE BOLT FACES FORWARD.

COMPONENTS

Weight Stack Cushion (6), Guide Rods (5),
 20lb Weight Plates (11),
 15lb Weight Plates (10),
 Head Plate Assembly (8)

STEP 4

AFTER THE WEIGHT STACK IS FULLY INSTALLED, LIFT UP THE GUIDE RODS (5) AND RETAIN THE GUIDE RODS.

COMPONENTS

Cap Head Screws $\frac{3}{8}$ " x $4\frac{1}{2}$ " L (34),
 Curved Washers (30), Lock Nuts $\frac{3}{8}$ " x 11T (2)

STEP 5

PLACE THE GUIDE ROD COLLARS (7) ONTO THE GUIDE RODS AGAINST THE GUIDE ROD PLASTIC COLLAR PREINSTALLED IN THE UPPER FRAME. ATTACH THE GUIDE RODS TO THE MAIN TOWER.

COMPONENTS


Cap Head Screws $\frac{3}{8}$ " x $2\frac{3}{4}$ " L (25),
 $\frac{3}{8}$ " Flat Washers (1), $\frac{3}{8}$ " x 11T Lock Nuts (2)

PLEASE NOTE

Use M4 Allen Wrench to secure the set screws in the Guide Rod Collars.

Hand Tighten and then Wrench Tighten after the components are aligned.

USE M4 ALLEN WRENCH TO SECURE THE SET SCREWS AFTER THE COLLARS ARE POSITIONED AGAINST THE PLASTIC COLLARS

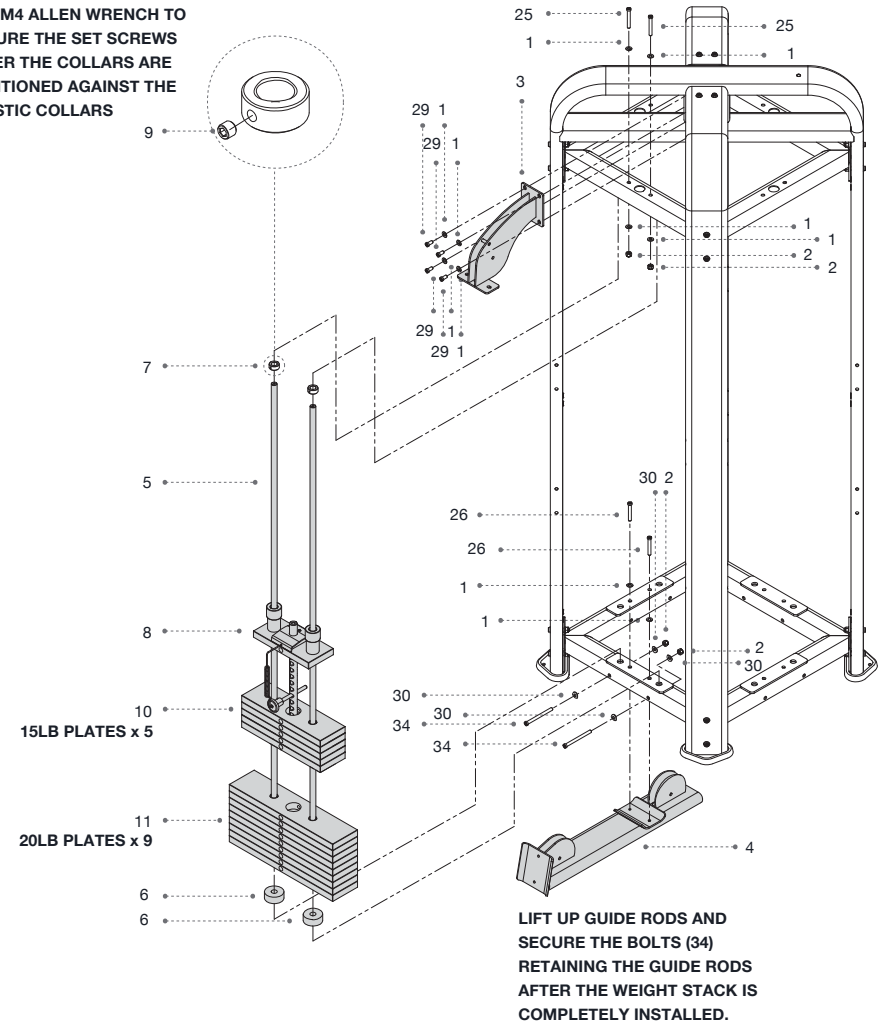

LIFT UP GUIDE RODS AND SECURE THE BOLTS (34) RETAINING THE GUIDE RODS AFTER THE WEIGHT STACK IS COMPLETELY INSTALLED.

2.3 Assembly Guide

STEP 6

ATTACH THE SEAT FRAME (12) TO THE ROW BASE ASSEMBLY.

COMPONENTS

Cap Head Screws 3/8" x 2"L With Blue Patch (27), 3/8" Flat Washers (1)

STEP 7

ATTACH THE FOOT REST ASSEMBLY (13) TO THE SEAT FRAME.

COMPONENTS

Cap Head Screws 3/8" x 3/4"L With Blue Patch (29), 3/8" Flat Washers (1)

STEP 8

ATTACH THE CONNECTING TUBE (15) TO THE MAIN TOWER.

COMPONENTS

Cap Head Screws 3/8" x 155mmL (23), Curved Washers (30), Lock Nut 3/8" x 7.2t (31)

STEP 9

SECURE THE CONNECTING TUBE TO THE SEAT FRAME.

COMPONENTS

Cap Head Screws 3/8" x 2 3/4"L with blue patch (25), Curved Washers (30)

STEP 10

ATTACH THE SEAT PAD (35) TO THE SEAT FRAME COMPONENTS.

Cap Head Screws 3/8" x 2 1/2"L with blue patch (26), 3/8" Flat Washers (1)

STEP 11

INSERT THE SHAFT OF SWIVEL PULLEY (16) THROUGH THE CONNECTING TUBE, AND SECURE THE SHAFT WITH THE C CLIP (33) BY USING C CLIP PLIER.

APPLY THE WEIGHT NUMBERING DECALS TO THE WEIGHT PLATES AS SHOWN.


COMPONENTS

Cap Head Screws 3/8" x 2 3/4"L (25), 3/8" Flat Washers (1), 3/8" x 11t Lock Nuts (2)


STEP 12

HAND TIGHTEN AND THEN WRENCH TIGHTEN AFTER THE COMPONENTS ARE ALIGNED.

WEIGHT STACK NUMBERING LABEL
15LB—270LB (6.8KG—122.7KG)

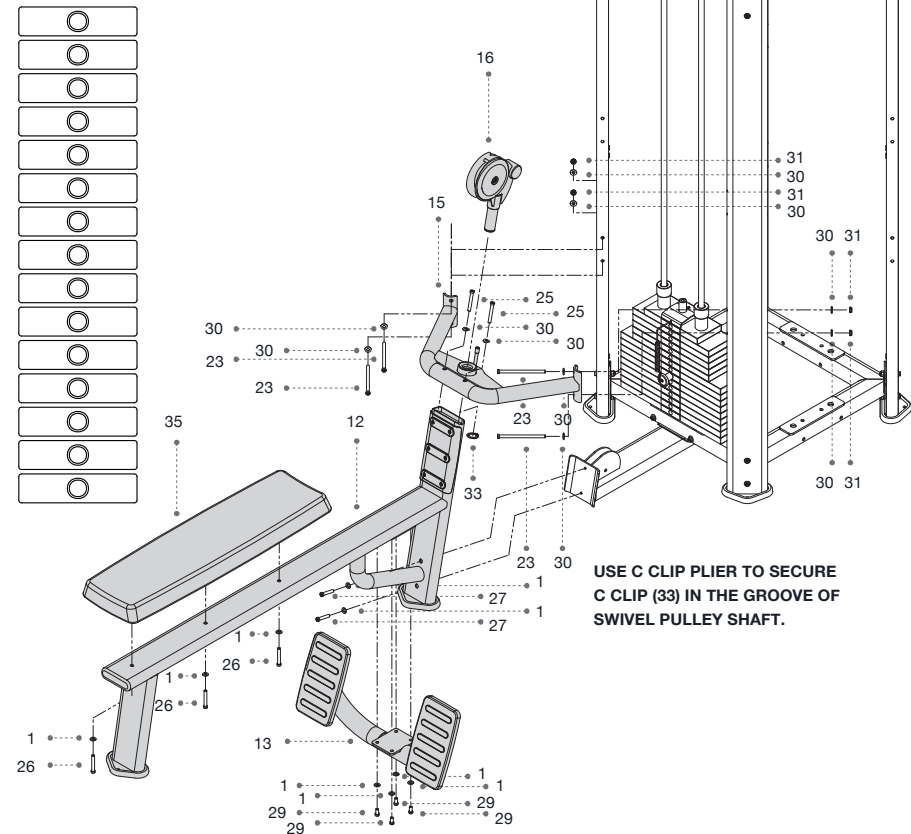

2.3 Assembly Guide

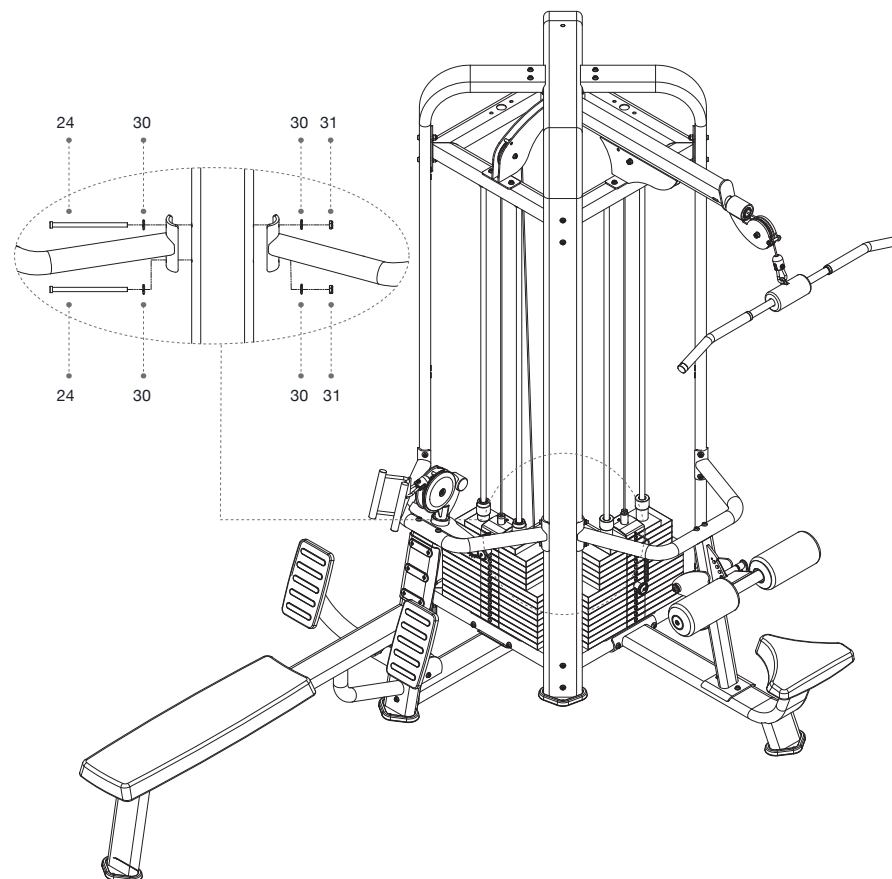

2.3 Assembly Guide

STEP 13

BEGIN WITH THREADING THE BOLT OF THE CABLE IN THE HEAD PLATE ASSEMBLY AS SHOWN, INSTALL THE PULLEYS (17) WHILE ROUTING THE CABLE. FINISH THE CABLE ROUTING AT THE SWIVEL PULLEY.

COMPONENTS

4 1/2" Pulley (17), Flatoval End Cap (22),
Cap Head Screw 3/8" x 2"L (28),
3/8" Flat Washer (1), Lock Nut 3/8" x 11t (2)

STEP 14

AFTER THE CABLE INSTALLATION IS COMPLETED, SLIDE THE CABLE PLASTIC HOUSING (21) ONTO THE CABLE. ATTACH THE CRIMP CABLE END TO THE U BRACKET (19) AND SLIDE THE U BRACKET IN THE PLASTIC CABLE HOUSING ALIGN THE CABLE PLASTIC HOUSING WITH THE U BRACKET AND USE THE SHOULDER BOLT (20) TO LOCK IN.


SNAP THE SNAP HOOK (32) TO ATTACH THE SHOULDER BOLT AND THE TRIANGLE HANDLE (14).

COMPONENTS

Cable Plastic Housing (21), U Bracket (19),
Shoulder Bolt (20), Triangle Handle (14),
Snap Hook (32)

PLEASE NOTE

Hand Tighten and then Wrench Tighten after the components are aligned.

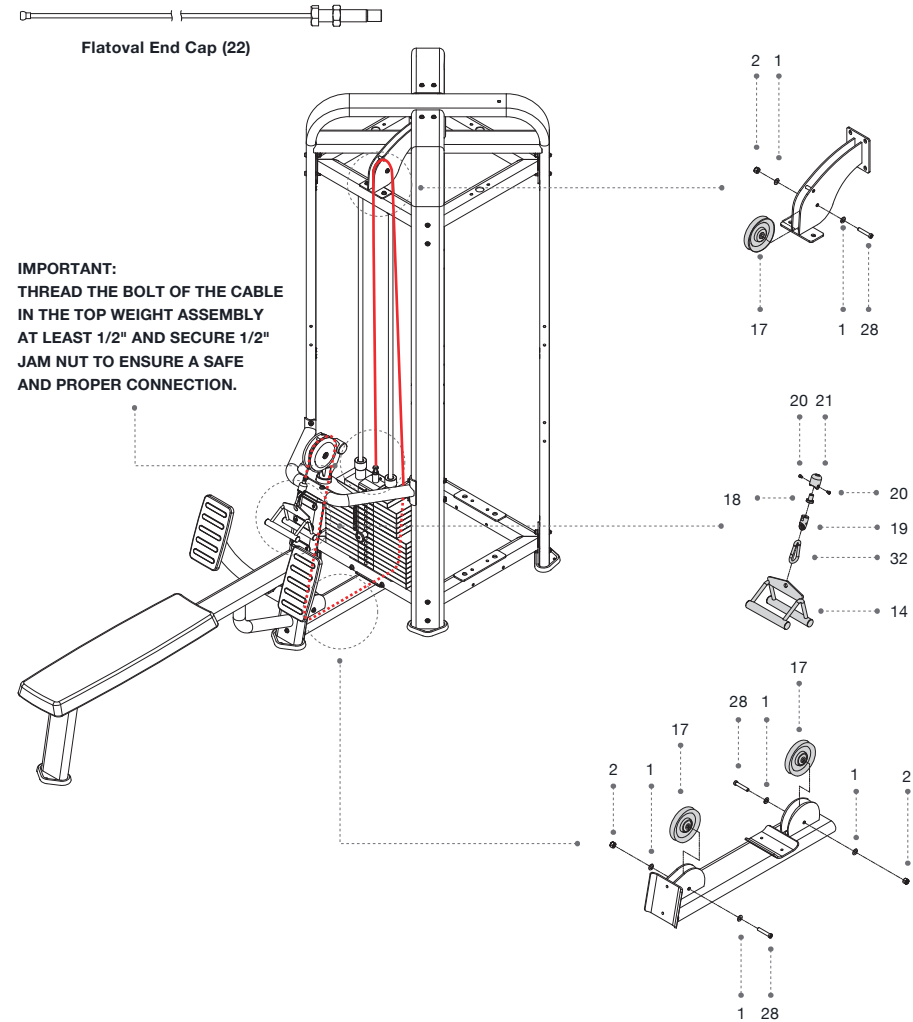

3. Care & Maintenance

3.1 Commercial Maintenance Schedule

INSPECT	DAILY	WEEKLY	MONTHLY	6 MONTHS	ANNUALLY
Cables for wear, tension, and proper connection.	•				
All adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys.	•				
All safety and instructional decals.	•				
All weight stack shrouds.	•				
All nuts and bolts and tighten if needed.		•			
All anti-slip surfaces and replace as needed.		•			
All accessory bars and handles.		•			
CLEAN					
Upholstery	•				
Guide rods and lubricate with a teflon lubricant			•		
LUBRICATE					
Pivot bearings and linear bearings				•	
REPLACE					
Cables					•

BEFORE YOU BEGIN

Preventative maintenance is crucial to maintaining the function and safety of this equipment. Your facility must establish written guidelines for preventative maintenance and keep written or online records of the maintenance performed on these products. As a minimum, the items presented in the Safety Instructions section of this document and the items that follow here, should be included in your maintenance program.


IMPORTANT Always purchase replacement parts and hardware from Intenza. Many parts are tested and manufactured specifically for Intenza commercial strength equipment. If you use parts not approved by Intenza, you could void the Intenza Limited Warranty. Use of parts not approved by Intenza may cause injury. Intenza recommends that maintenance technicians thoroughly read and understand the safety guidelines and maintenance procedures covered in this manual.

NOTE If the equipment requires assembly, please refer to 2.3 Assembly guide section in this manual.


TOOLS




1. Allen Wrench, 4mm, 5mm, 6 Mm



2. 9/16" Socket Wrench/Adjustable Wrench



3. Rubber Mallet



4. Tape Measure

3.2 Daily Inspection&Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each day before the equipment is subject to use. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Inspect cables for wear, tension, and proper connection (See 3.6 Cable Inspection&Maintenance Section) if equipped.
- Inspect all adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys if equipped.
- Inspect all safety and instructional decals.
- Inspect all weight stack shrouds if equipped.
- Verify that rubber hand grips are intact and secure.
- Verify that anti-skid foot grips are intact and secure
- Verify that the weight stack selector pin is attached with the coiled lanyard to the top plate if equipped.

3.3 Weekly Inspection&Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each week. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Check entire length of cable&end fittings for any signs of wear if equipped. Replace immediately as required. (See 3.6 Cable Inspection&Maintenance Section).
- Verify that a minimum of 1/2 inch (12.7 mm) of the threaded portion of the cable bolt is threaded into the top plate and that the nut is tight if equipped with a cable. (See 3.6 Cable Inspection&Maintenance Section).
- Perform a function test by placing the selector pin in the top plate and cycling the machine through the intended motion if equipped with a cable. Verify that the machine operates smoothly without binding. Select a moderate weight and repeat.
- Verify that each pulley rotates freely when performing the exercise if equipped with pulleys. A pulley that does not rotate will cause extreme cable wear and could lead to cable failure. Determine cause and remedy immediately.
- Verify that the adjustment pop pins retract easily and fully engage (when released) into each adjustment disc hole/slot. The pop pins are spring loaded so they should return to the engaged position when you release the knob.
- Verify that the adjustment pin disengages and engages freely when actuating the adjustment mechanism. Be sure that the adjustment pin inserts fully into the adjustment disc.
- Verify that all hardware is tight and that associated frame members are secure. Apply a few small drops of a thread locking compound such as Loctite on any loose bolts.
- Inspect frame for integrity and function. Replace any components at the first sign of wear with only Intenza supplied parts.

3.4 Other Scheduled Preventive Maintenance

Intenza recommends that scheduled maintenance be performed by a qualified service technician. Please contact your dealer or visit www.intenzafitness.com to contact a local Intenza authorized service technician.

MONTHLY

Clean guide rods and lubricate with a Teflon grease if equipped with guide rods.

EVERY 6 MONTHS

Lubricate pivot bearing and linear bearings with lithium grease. Intenza supplied parts.

3.5 Clean The Equipment

CAUTION

Do not use any acidic cleaners. Doing so will weaken the paint or powder coatings and may void the Intenza Warranty. Never pour or spray liquids on any part of the equipment. Allow the equipment to dry completely before using.

CAUTION

If you determine that the equipment needs service, make sure that the equipment cannot be used inadvertently and ensure other users know that the machine needs service.

*To order parts or to contact a Intenza Authorized Service representative, please visit www.intenzafitness.com

Wipe all machines with a water dampened cloth and dry completely. This includes painted parts, chrome plated parts (except guide rods), plastic parts, and upholstered pads. It is important not to leave parts damp. This will increase the potential for corrosion to occur.

CAUTION

Certain anti-bacterial cleaners and other harsh cleaning agents can induce corrosion on the machine components. These solutions can also dry out and cause cracking and splitting on the upholstery.

HEAVY DUTY CLEANING

GUIDE RODS (IF EQUIPPED)	Clean and lubricate with a Teflon Spray. Be sure to coat the entire guide rod. Spraying lubricant into the cap plate bushings is also recommended
CHROMED ADJUSTMENT TUBES	Wipe away dust and dirt before applying a Teflon spray lubricant. Intenza recommends using TriFlow or a similar brand.
LINEAR BEARINGS	Clean the linear shaft and lubricate (as required) with Teflon based grease. Keeping linear bearings clean and lubricated is critical to long life and good performance
PAINTED FRAMES	If you have scuff marks, grease or a heavy dirt buildup on frame components, start with a mild soap solution or a diluted solution of a product such as Simple Green with a dilution of 32:1. If you cannot remove the marks using those methods, use a car polish/cleaner. DO NOT use solvents such as lacquer thinner, mineral spirits or acetone. For deeper scuff marks, use an automobile finish rubbing compound
UPHOLSTERY	For heavy duty cleaning, use a mild soap solution. This method should be sufficient in the majority of instances. In severe stain cases, you can use a solution of 5–10% household bleach diluted with water. Be sure to test an inconspicuous area first. DO NOT use chemical cleaners on the vinyl upholstery. You can also use a lanolin based hand cleaner to clean your upholstery. Wipe off after cleaning with a damp cloth and thoroughly dry
PLASTIC PARTS	Use a mild soap solution to clean dirt and grease marks
LABELS	Use a mild soap solution to clean dirt and grease marks
SHROUDS	Use a mild soap solution to clean dirt and grease marks

3.6 Cable Inspection & Maintenance

One of the most critical areas that require frequent inspection on any weight machine is the cable system that lifts the weight stack if the machine is equipped with those items. Sudden failure of a worn cable can, in some instances, result in injury to the user. It is the responsibility of the facility to inspect the cables frequently.

Cables are components that wear over time. This means that the more often a piece of equipment is used, the greater the likelihood that cable wear will occur.

Listed below are the areas of the cable that require inspection.

*Intenza recommends that all cables be replaced on an annual basis to maintain the safety of all users.

CABLE WEAR

Inspect all cables for any signs of wear. Pay close attention to the cable in the area of the end fittings and attachment points. Inspect the areas around the pulleys and/or cams. Shown below are examples of cables that exhibit signs of potential failure. If any of these conditions are apparent, the machine should immediately be taken out of service and repaired. Be sure to use only cables supplied by Intenza. DO NOT use cables that have fittings attached with handcrimp tools.

1. Twisted Cable (Zig—zag Pattern)



2. Break in the Cable Cover



3. Break/Bend in Cable




4. Tear in the Cable Cover



5. Stretched Cable Covering



6. Crimp Connector Dislodged

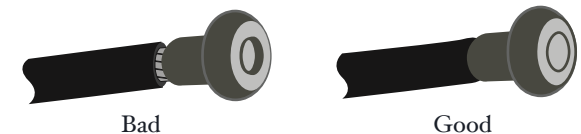

3.6 Cable Inspection & Maintenance

CAUTION



A minimum of 1 inch (25.4mm) of the threaded portion of the cable bolt must be threaded into the top plate.

No more than 1 inch (25.4 mm) of the threaded portion of the cable bolt should be visible.

CABLE TENSION


Ensure that the cables are adjusted to remove any slack using the threaded end fittings. These are normally located at the weight stack connection. Depending upon the machine, there may be multiple threaded fitting on multiple cables. You can determine if there is too much slack by performing the exercise. As you start to move a load arm or handle, the weight stack should lift immediately. If not, the cable tension needs to be adjusted.

To adjust the cable tension, loosen the cable nut that is located on the cable bolt connected to the top plate. Tighten the cable bolt until the top plate is barely lifted off of the first weight plate and then re-tighten the cable nut.

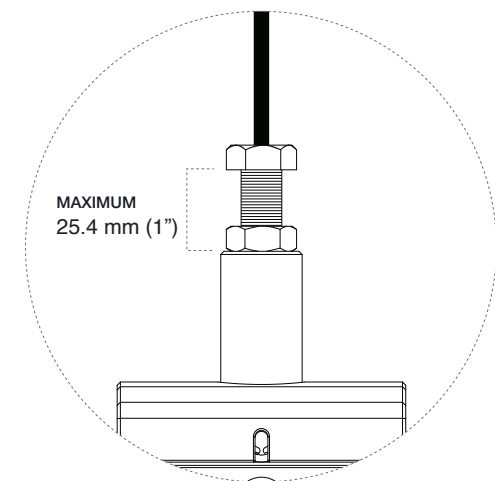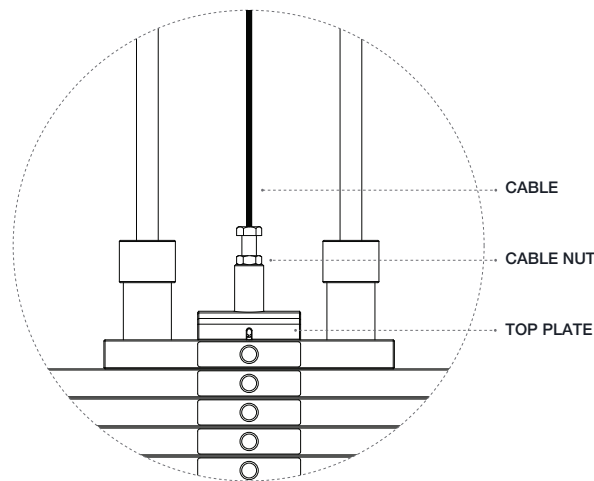

HANDLE FITTINGS (IF APPLICABLE)

Inspect the cable fittings where any handles are attached to the end of the cable. The fittings supplied with this machine are load rated snap-links. Ensure that the snap-link opens and closes easily and is fully engaged when closed. Replace the snap-link as needed.





© 2023 HealthStream Taiwan Inc.
No. 28, Jiaotuzai Boulevard, Liuying District, Tainan City 736, Taiwan
2023.08.25 Version 1.0

INTENZAfitness.com