

CABLE STATIONS AND MACHINE OWNER'S MANUAL
INTENZA LAT PULL DOWN SINGLE STATION CMS—LPSS



intenza

Table of Contents

1	IMPORTANT SAFETY INSTRUCTIONS	2
1.1	Important Safety Guidelines For Owners	2
1.2	Important Safety Information For Users	3
1.3	Label Locations	4
2	INSTALLATION AND ASSEMBLY	5
2.1	Product Information	5
2.2	Place Of Installation	6
2.3	Assembly Guide	6
3	CARE AND MAINTENANCE	14
3.1	Commerical Maintenance Schedule	14
3.2	Daily Inspection&Maintenance	15
3.3	Weekly Inspection&Maintenance	15
3.4	Other Scheduled Preventive Maintenance	16
3.5	Cleaning The Equipment	16
3.6	Cable inspection&maintenance	17

IMPORTANT SAFETY INSTRUCTIONS

It is the sole responsibility of the purchaser of Intenza products to instruct all individuals, whether they are the end user or supervising personnel on proper usage of the equipment.

It is recommended that all users of Intenza exercise equipment be informed of the following information prior to its use.

1.1 Important Operation Instructions for Owners

Follow these guidelines to maintain proper working condition of the equipment—

IMPORTANT Do not modify the equipment or any of its parts, or permanently remove any part from the equipment. Do not use accessory attachments that are not recommended by Intenza, as such attachments might cause injuries.

- Qualified technicians must perform all regular maintenance.
- Do not remove warning labels for any reason. They contain important information. If unreadable or missing, contact your Intenza dealer for a replacement.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected.
- Make sure that trainers, facility personnel, and maintenance technicians understand how to use the equipment, know important safety guidelines, and can recognize potential problems such as loose hardware, or cracked weld. If any staff member witnesses unsafe use of the equipment, he or she should address the user directly, demonstrate the proper technique, and review the Important Safety Information for Users.
- Intenza recommends posting a copy of the Important Safety Information for Users near the equipment in a prominent location.
- Place an “out—of—order” sign on the equipment during maintenance of the equipment or the surrounding area. Users should never be allowed to operate the equipment until it has been inspected and works properly. If a piece of equipment needs service, keep it out of use until it is repaired. Place an “out—of—order” sign on the equipment and make sure the facility’s personnel know not to allow anyone to use the equipment until it is working properly.
- When working with the weight stacks, do not attempt to free any jammed assemblies without assistance as this may cause injury.
- NEVER use this machine with the weight stack pinned in an elevated position.
- Do not place the equipment outdoors or on wet surfaces.

1.2 Important Safety Instructions For Users

Read all instructions before using the equipment. These instructions were written to ensure your safety and to protect the equipment. Equipment is intended for commercial use.

Before beginning any fitness program, you should obtain a complete physical examination from your physician.

When using exercise equipment, you should always take basic precautions, including the following—

- If you do not understand how to operate a piece of equipment, ask someone from the facility such as a trainer to demonstrate how to use it and explain any safety instructions.
- Do not allow children on or near the equipment. Do not leave children unsupervised around the equipment.
- Use the equipment only for its intended purpose. Do not use accessory attachments that are not recommended by the manufacturer, as such attachments may cause injuries.
- Wear proper exercise clothing and shoes during a workout: no garments that impede perspiration and no loose clothing. Tie long hair back. Keep garments or towels away from moving parts.
- Do not overexert yourself or work to exhaustion. Use reasonable judgment when working with weights. Avoid using excessive weight, which may cause injury.
- If you feel pain, faintness, dizziness, or abnormal symptoms, stop exercising immediately and consult your physician.
- Keep head, limbs, fingers, and hair clear of all moving parts while the equipment is in use. Keep hands clear of racking pegs.
- Never drop or insert objects into any opening in the equipment.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected. Pay particular attention to the condition of cables and cable ends. If you notice a loose cable end or any fraying of the cable or cable jacket, do not use the product and contact someone in the facility immediately."
- Always check the equipment before using it. If you spot a potential problem, contact someone in the facility immediately. Do not use the equipment until the facility has verified that the equipment is working properly. Do not attempt to fix broken or jammed equipment.
- Do not use the equipment outdoors or on wet surfaces.
- Do not drop or slam the weight stack while exercising.
- Be sure the selector pin is completely inserted. Use only the pin provided by the manufacturer. If unsure, contact someone in the facility.
- Never pin the weights in an elevated position. Do not use the equipment if the top plate or weight stack is pinned in a raised position. Notify the facility's personnel to repair the equipment and ensure that it is working properly.

1.3 Warning Label Locations

WARNING

During all operations involving transport, maintenance and cleaning, pay attention to any part of the equipment where body parts may become trapped. Attention must be paid to the labels attached to the equipment, as they provide information about possible risks and hazards. We recommend immediately replacing the labels when they become damaged or difficult to read.

CMS—LPSS LAT PULL DOWN SINGLE STATION


WARNING

SERIOUS INJURY CAN OCCUR ON THIS EQUIPMENT. YOU MUST FOLLOW THESE PRECAUTIONS TO AVOID INJURY !

1. Before using, read all the warnings and obtain instruction on the use of this machine. Use only for intended exercise. **DO NOT** modify the machine.
2. Obtain a medical exam before beginning any exercise program.
3. Children must not be allowed near this machine. Supervise teenagers.
4. Inspect the machines before use. **DO NOT** use if it appears damaged. **DO NOT** attempt to fix a broken or jammed machine. Notify staff immediately.
5. Inspect cables and their connections before using machine. **DO NOT** attempt to fix. Seek assistance.
6. Keep body, hair and clothing free of all moving objects.
7. Be certain that weight pin is completely inserted. Use only the pin provided by the manufacturer. If unsure, seek assistance.
8. Never pin the weights or prop plate into an elevated position. **DO NOT** use the machine if found in this condition. **DO NOT** attempt to fix. Seek assistance.
9. Use only the incremental weights supplied by the manufacturer. **DO NOT** use dumbbells or other means to add resistance to the machine.
10. **DO NOT REMOVE THIS LABEL. REPLACE IF DAMAGED.**


WARNING

DO NOT HANG FROM LAT BAR

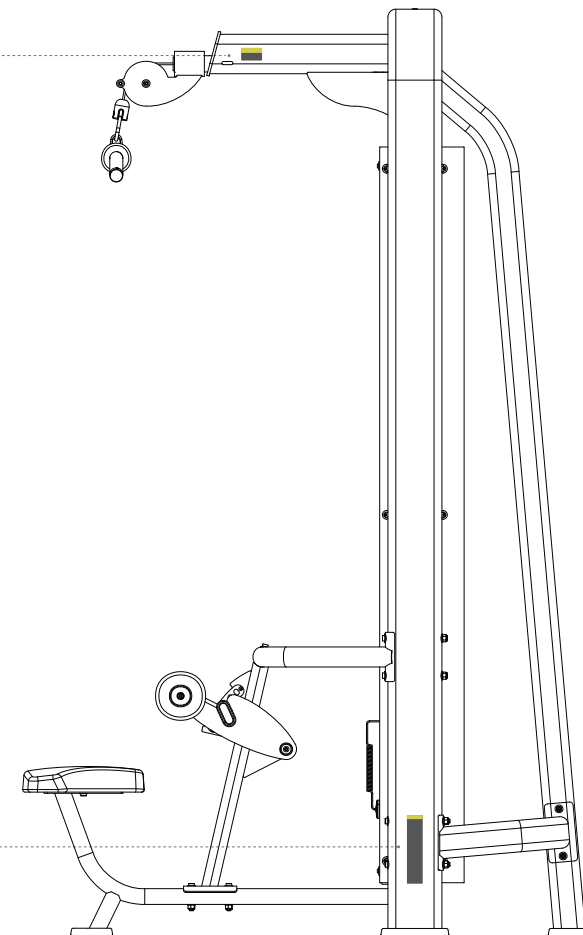


2. Installation

2.1 Product Information




SERIAL NUMBER LABEL LOCATION

SERIAL NUMBER LABEL LOCATION		ASSEMBLY DIMENSIONS		
A	Manufacturer's name	LENGTH	144 cm	56.7 inches
B	Model number	WIDTH	113 cm	44.5 inches
C	Serial number	HEIGHT	235 cm	92.5 inches
D	Consultation of user manual required	EQUIPMENT WEIGHT	257 kg	566 lbs
		WEIGHT STACK	122 cm	270 lbs
		LIVE AREA	205 x 205 cm	81 x 81 inches

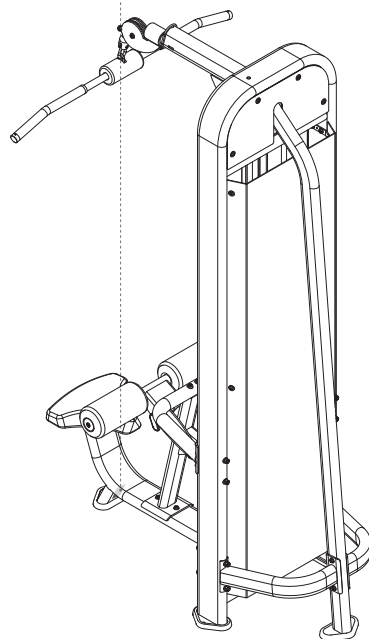

LIVE AREA

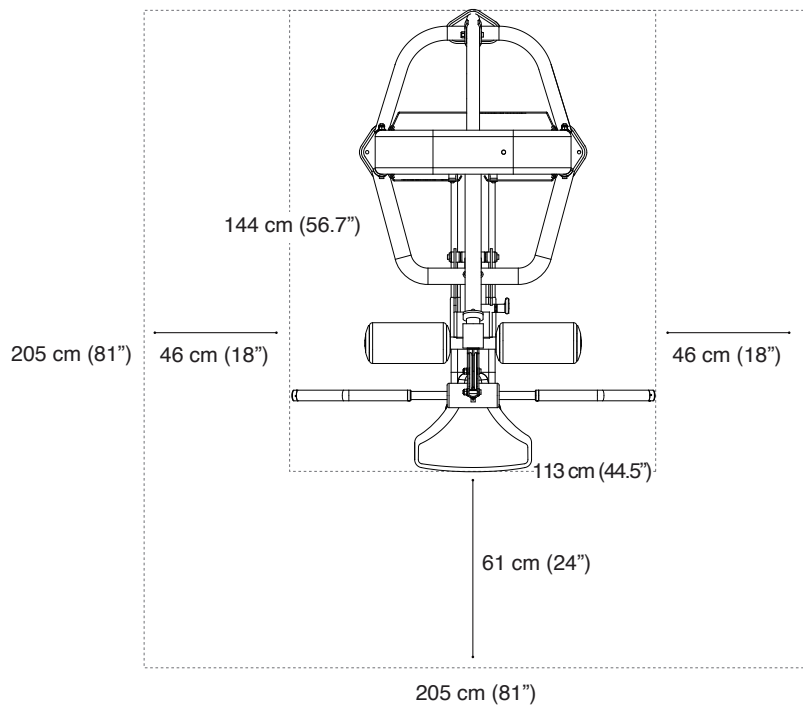

2.2 Place of Installation

To ensure safe, comfortable and effective use of the equipment, the place of installation must comply with certain specific requirements. In particular, before choosing where to install the equipment we recommended that you check that the following conditions are available—

- A temperature between +10°C and +25°C.
- Sufficient ventilation to maintain a humidity level between 20% and 90%, when the equipment is in use.
- Sufficient lighting to make the area a safe and relaxing place to exercise.
- Sufficient clearance on all sides of the equipment, taking into account its maximum dimensions when in use, to ensure safety.
- A flat, stable and vibration—free floor surface, with sufficient load bearing capacity for the equipment's weight.
- If the equipment is to be installed in a public recreation area, the place of installation must comply with all the requirements of the regulations currently in force.

WARNING

The equipment must be installed and used in a place where access and supervision are specifically controlled by the owner. When installing the equipment, use suitable personal protective equipment.

2.3 Assembly Guide

UNPACKING

Thank you for purchasing a Intneza product. Your Intenza product is inspected before it is packaged. It is shipped in multiple pieces to facilitate the compact packaging of the machine. Prior to assembly, confirm all the components by matching them with the exploded diagrams. Carefully unpack the unit from this box and dispose of the packing materials in accordance with your local laws.

CAUTION


The weight of the product is heavy. To avoid injury to yourself and prevent damage to the frame components, be sure to have proper assistance removing the frame pieces from this box. Please be sure to install the equipment on a stable base, properly level the machine and leave at least two feet of clearance to enter and exit the machine.

2.3 Assembly Guide


TOOLS




1. Allen Wrench, 4mm, 5mm, 6 mm



2. Open Wrench/Adjustable Wrench
17 mm, 19mm



3. Screwdriver




3. Rear Connect Tube, Right
QTY 1




4. Main Upright Assembly
QTY 1




5. Rear Upright Assy
QTY 1




8. Upright
QTY 1




9. Bottom Bracket
QTY 1




10. Top Bracket
QTY 1




1. Top Beam
QTY 1




2. Rear Connect Tube, Left
QTY 1




6. Front Connect Tube
QTY 1



7. Seat Frame Assembly
QTY 1




11. Side Bracket
QTY 6




12. High Pulley Assembly
QTY 1


2.3 Assembly Guide

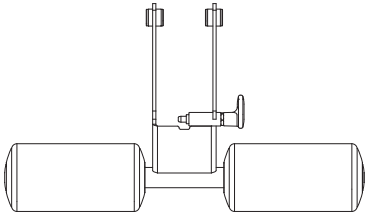

13. Leg Hold Down Assembly with Roller Pads
QTY 1




14. LP Seat Pad
QTY 1




15. Guide Rod Collar
QTY 2



16. Guide Rod
QTY 2

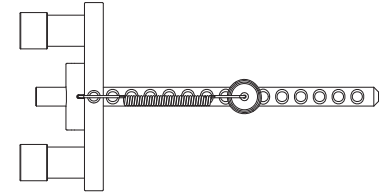


17. Head Plate Assembly
QTY 1



18. 15lb Weight Plate
QTY 5




19. 20lb Weight Plate
QTY 9




20. Weight Stack Cushion
QTY 2




21. Weight Stack numbering Label
QTY 1




22. Lat Bar
QTY 1




23. Cable Plastic Housing
QTY 1




24. Snap Hook
QTY 1



25. U Bracket
QTY 1



26. Shoulder Bolt with blue patch
QTY 1




27. 4 1/2" Pulley
QTY 2


2.3 Assembly Guide




28. Cable
QTY 1




29. Front Cover
QTY 1




30. Rear Cover
QTY 1



31. Weight Selector Pin
QTY 1




32. Cap Head Screw 3/8" x 6 1/4" L
QTY 8




33. Cap Head Screw 3/8" x 4 3/4" L
QTY 2




34. Cap Head Screw 3/8" x 3 1/4" L
QTY 2




35. Cap Head Screw 3/8" x 2 3/4" L
with blue patch
QTY 2




36. Cap Head Screw 3/8" x 2 1/2" L
QTY 8




37. Cap Head Screw 3/8" x 1 1/4" L
with blue patch
QTY 2




38. Cap Head Screw 3/8" x 1" L
with blue patch
QTY 2




39. 1" x 3/8" Flat Washer
QTY 2



42. Flat Washer 3/8" x 1t
QTY 42




41. Curved Washer
QTY 22



42. Lock Nut 3/8" x 11t
QTY 20

2.3 Assembly Guide




43. C Clip
QTY 1




44. Shaft
QTY 1





45. Roller Pad
QTY 2




46. Rubber Foot Pad
QTY 1




47. Cap Head Screw 3/8" x 3/4" L
QTY 14




48. Set Screw 5/16"x1/4" L
QTY 2




49. Button Head Screw 1/4"x1/2" L
with blue patch
QTY 24



50. Flat Washer 1/4"
QTY 24




51. Cap Head Screw 3/8" x 2" L
QTY 3



52. Front Shroud, Right
QTY 1




53. Front Shroud, Left
QTY 1



54. Rear Shroud
QTY 1

2.3 Assembly Guide


STEP 1

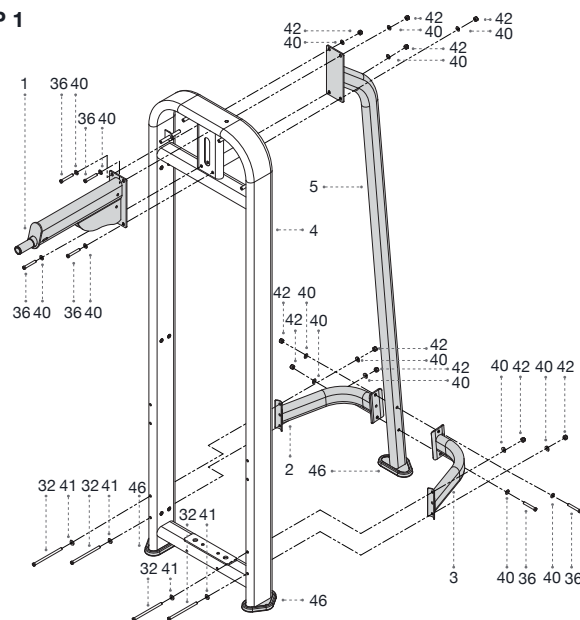

COMPONENTS

Top Beam (1), Rear Connect Tube, Left (2),
Rear Connect Tube, Right (3), Main Upright Assembly (4),
Rear Upright Assy (5), Cap Head Screw 3/8" x 6 1/4" L (32),
Cap Head Screw 3/8" x 2 1/2" L (36), Flat Washer 3/8" x 11 (40),
Curved Washer (41), Lock Nut 3/8" x 11 (42), Rubber Foot Pad (46)

STEP 2

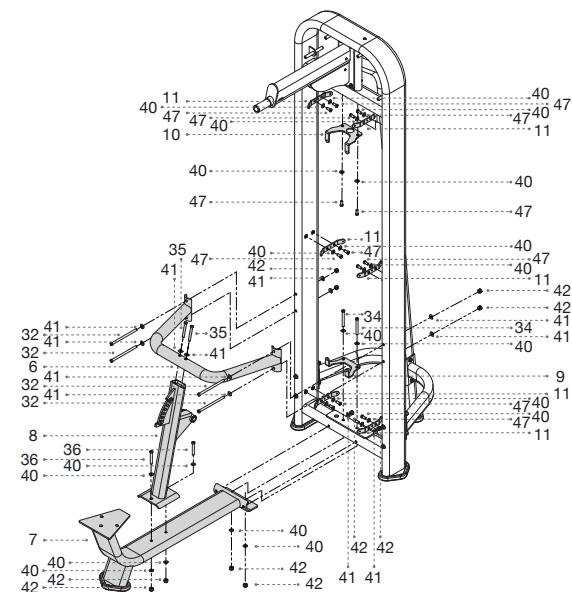


COMPONENTS

Front Connect Tube (6), Seat Frame Assembly (7), Upright (8),
Bottom Bracket (9), Top Bracket (10), Side Bracket (11),
Cap Head Screw 3/8" x 6 1/4" L (32), Cap Head Screw 3/8" x 3 1/4" L (34),
Cap Head Screw 3/8" x 2 3/4" L with blue patch (35),
Cap Head Screw 3/8" x 2 1/2" L (36), Flat Washer 3/8" x 11 (40),
Curved Washer (41), Lock Nut 3/8" x 11 (42),
Cap Head Screw 3/8" x 3/4" L (47)

2.3 Assembly Guide


STEP 3

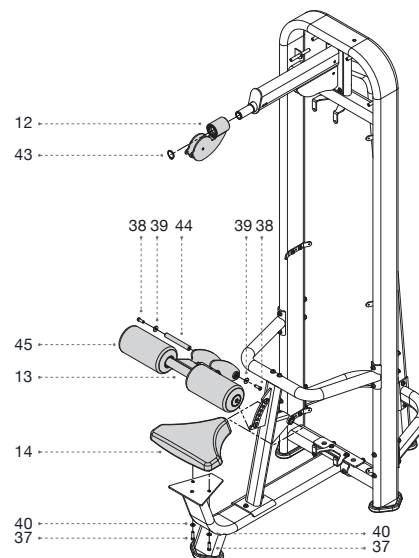

COMPONENTS

High Pulley Assembly (12),
Leg Hold Down Assembly with Roller Pads (13), LP Seat Pad (14),
Cap Head Screw 3/8" x 1 1/4" L with blue patch (37),
Cap Head Screw 3/8" x 1" L with blue patch (38),
1" x 3/8" Flat Washer (39), Flat Washer 3/8" x 1" (40),
C Clip (43), Shaft (44), Roller Pad (45)

STEP 4

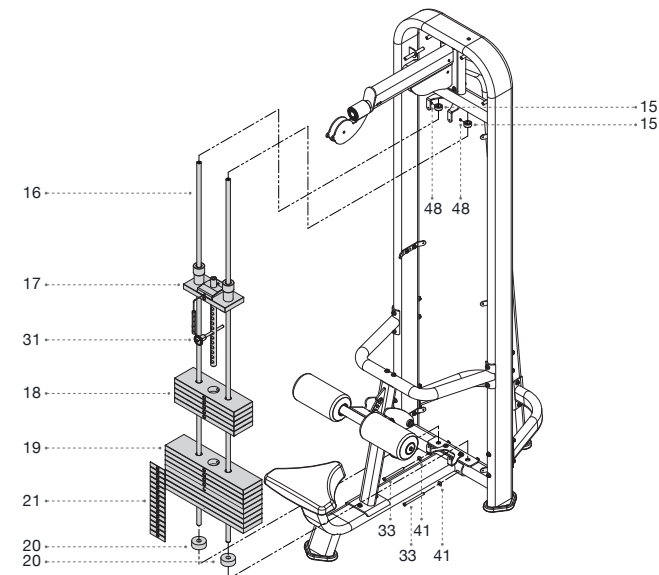


COMPONENTS

Guide Rod Collar (15), Guide Rod (16), Head Plate Assembly (17),
15lb Weight Plate (18), 20lb Weight Plate (19),
Weight Stack Cushion (20), Weight Stack numbering Label (21),
Weight Selector Pin (31), Cap Head Screw 3/8" x 4 3/4" L (33),
Curved Washer (41), Set Screw 5/16"x1/4" L (40)

2.3 Assembly Guide


STEP 5

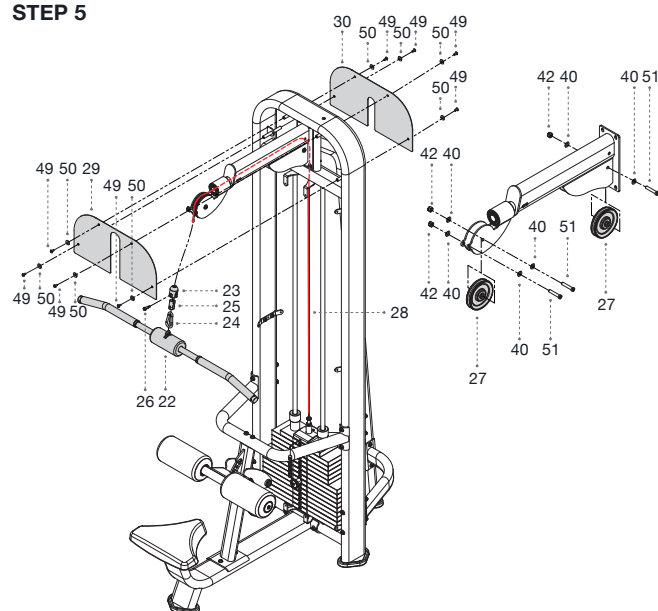

COMPONENTS

Lat Bar (22), Cable Plastic Housing (23), Snap Hook (24), U Bracket (25), Shoulder Bolt with blue patch (26), 4 1/2" Pulley (27), Cable (28), Front Cover (29), Rear Cover (30), Flat Washer 3/8" x 11t (40), Lock Nut 3/8" x 11t (42), Button Head Screw 1/4"x1/2"L with blue patch (49), Flat Washer 1/4" (50), Cap Head Screw 3/8" x 2" L (51)

STEP 6

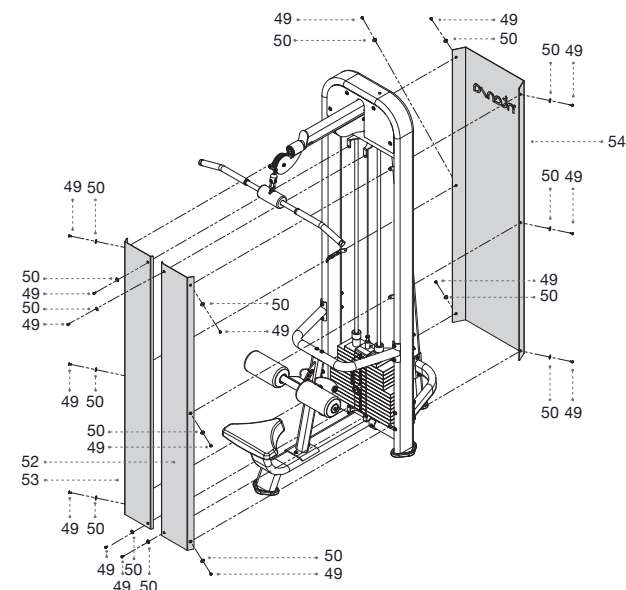

COMPONENTS

Button Head Screw 1/4"x1/2"L with blue patch (49), Flat Washer 1/4" (50), Front Shroud, Right (52), Front Shroud, Left (53), Rear Shroud (54)

3. Care&Maintenance

3.1 Commercial Maintenance Schedule

INSPECT	DAILY	WEEKLY	MONTHLY	6 MONTHS	ANNUALLY
Cables for wear, tension, and proper connection.	•				
All adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys.	•				
All safety and instructional decals.	•				
All weight stack shrouds.	•				
All nuts and bolts and tighten if needed.		•			
All anti-slip surfaces and replace as needed.		•			
All accessory bars and handles.		•			
CLEAN					
Upholstery	•				
Guide rods and lubricate with a teflon lubricant			•		
LUBRICATE					
Pivot bearings and linear bearings				•	
REPLACE					
Cables					•

BEFORE YOU BEGIN

Preventative maintenance is crucial to maintaining the function and safety of this equipment. Your facility must establish written guidelines for preventative maintenance and keep written or online records of the maintenance performed on these products. As a minimum, the items presented in the Safety Instructions section of this document and the items that follow here, should be included in your maintenance program.


IMPORTANT Always purchase replacement parts and hardware from Intenza. Many parts are tested and manufactured specifically for Intenza commercial strength equipment. If you use parts not approved by Intenza, you could void the Intenza Limited Warranty. Use of parts not approved by Intenza may cause injury. Intenza recommends that maintenance technicians thoroughly read and understand the safety guidelines and maintenance procedures covered in this manual.

NOTE If the equipment requires assembly, please refer to 2.3 Assembly guide section in this manual.


TOOLS



1. ALLEN WRENCH, 4MM, 5MM, 6 MM



2. OPEN WRENCH/ADJUSTABLE WRENCH
17 MM, 19MM



3. SCREWDRIVER

3.2 Daily Inspection & Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each day before the equipment is subject to use. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Inspect cables for wear, tension, and proper connection (See 3.6 Cable Inspection & Maintenance Section) if equipped.
- Inspect all adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys if equipped.
- Inspect all safety and instructional decals.
- Inspect all weight stack shrouds if equipped.
- Verify that rubber hand grips are intact and secure.
- Verify that anti-skid foot grips are intact and secure.
- Verify that the weight stack selector pin is attached with the coiled lanyard to the top plate if equipped.

3.3 Weekly Inspection & Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each week. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Check entire length of cable & end fittings for any signs of wear if equipped. Replace immediately as required. (See 3.6 Cable Inspection & Maintenance Section).
- Verify that a minimum of 1/2 inch (12.7 mm) of the threaded portion of the cable bolt is threaded into the top plate and that the nut is tight if equipped with a cable. (See 3.6 Cable Inspection & Maintenance Section).
- Perform a function test by placing the selector pin in the top plate and cycling the machine through the intended motion if equipped with a cable. Verify that the machine operates smoothly without binding. Select a moderate weight and repeat.
- Verify that each pulley rotates freely when performing the exercise if equipped with pulleys. A pulley that does not rotate will cause extreme cable wear and could lead to cable failure. Determine cause and remedy immediately.
- Verify that the adjustment pop pins retract easily and fully engage (when released) into each adjustment disc hole/slot. The pop pins are spring loaded so they should return to the engaged position when you release the knob.
- Verify that the adjustment pin disengages and engages freely when actuating the adjustment mechanism. Be sure that the adjustment pin inserts into the adjustment disc.
- Verify that all hardware is tight and that associated frame members are secure. Apply a few small drops of a thread locking compound such as Loctite on any loose bolts.
- Inspect frame for integrity and function. Replace any components at the first sign of wear with only Intenza supplied parts.

3.4 Other Scheduled Preventive Maintenance

Intenza recommends that scheduled maintenance be performed by a qualified service technician. Please contact your dealer or visit www.intenzafitness.com to contact a local Intenza authorized service technician.

MONTHLY

Clean guide rods and lubricate with a Teflon grease if equipped with guide rods.

EVERY 6 MONTHS

Lubricate pivot bearing and linear bearings with lithium grease. Intenza supplied parts.

3.5 Clean The Equipment

CAUTION

Do not use any acidic cleaners. Doing so will weaken the paint or powder coatings and may void the Intenza Warranty. Never pour or spray liquids on any part of the equipment. Allow the equipment to dry completely before using.

CAUTION

If you determine that the equipment needs service, make sure that the equipment cannot be used inadvertently and ensure other users know that the machine needs service.

*To order parts or to contact a Intenza Authorized Service representative, please visit www.intenzafitness.com

Wipe all machines with a water dampened cloth and dry completely. This includes painted parts, chrome plated parts (except guide rods), plastic parts, and upholstered pads. It is important not to leave parts damp. This will increase the potential for corrosion to occur.

CAUTION

Certain anti-bacterial cleaners and other harsh cleaning agents can induce corrosion on the machine components. These solutions can also dry out and cause cracking and splitting on the upholstery.

HEAVY DUTY CLEANING

GUIDE RODS (IF EQUIPPED)	Clean and lubricate with a Teflon Spray. Be sure to coat the entire guide rod. Spraying lubricant into the cap plate bushings is also recommended
CHROMED ADJUSTMENT TUBES	Wipe away dust and dirt before applying a Teflon spray lubricant. Intenza recommends using TriFlow or a similar brand.
LINEAR BEARINGS	Clean the linear shaft and lubricate (as required) with Teflon based grease. Keeping linear bearings clean and lubricated is critical to long life and good performance
PAINTED FRAMES	If you have scuff marks, grease or a heavy dirt buildup on frame components, start with a mild soap solution or a diluted solution of a product such as Simple Green with a dilution of 32:1. If you cannot remove the marks using those methods, use a car polish/cleaner. DO NOT use solvents such as lacquer thinner, mineral spirits or acetone. For deeper scuff marks, use an automobile finish rubbing compound
UPHOLSTERY	For heavy duty cleaning, use a mild soap solution. This method should be sufficient in the majority of instances. In severe stain cases, you can use a solution of 5–10% household bleach diluted with water. Be sure to test an inconspicuous area first. DO NOT use chemical cleaners on the vinyl upholstery. You can also use a lanolin based hand cleaner to clean your upholstery. Wipe off after cleaning with a damp cloth and thoroughly dry
PLASTIC PARTS	Use a mild soap solution to clean dirt and grease marks
LABELS	Use a mild soap solution to clean dirt and grease marks
SHROUDS	Use a mild soap solution to clean dirt and grease marks

3.6 Cable Inspection & Maintenance

One of the most critical areas that require frequent inspection on any weight machine is the cable system that lifts the weight stack if the machine is equipped with those items. Sudden failure of a worn cable can, in some instances, result in injury to the user. It is the responsibility of the facility to inspect the cables frequently.

Cables are components that wear over time. This means that the more often a piece of equipment is used, the greater the likelihood that cable wear will occur.

Listed below are the areas of the cable that require inspection.

*Intenza recommends that all cables be replaced on an annual basis to maintain the safety of all users.

CABLE WEAR

Inspect all cables for any signs of wear. Pay close attention to the cable in the area of the end fittings and attachment points. Inspect the areas around the pulleys and/or cams. Shown below are examples of cables that exhibit signs of potential failure. If any of these conditions are apparent, the machine should immediately be taken out of service and repaired. Be sure to use only cables supplied by Intenza. DO NOT use cables that have fittings attached with handcrimp tools.

1. Twisted Cable (Zig—zag Pattern)



2. Break in the Cable Cover



3. Break/Bend in Cable




4. Tear in the Cable Cover



5. Stretched Cable Covering



6. Crimp Connector Dislodged

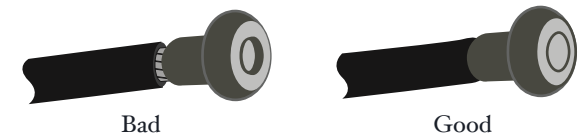

3.6 Cable Inspection & Maintenance

CAUTION



A minimum of 1 inch (25.4mm) of the threaded portion of the cable bolt must be threaded into the top plate.

No more than 1 inch (25.4 mm) of the threaded portion of the cable bolt should be visible.

CABLE TENSION


Ensure that the cables are adjusted to remove any slack using the threaded end fittings. These are normally located at the weight stack connection. Depending upon the machine, there may be multiple threaded fitting on multiple cables. You can determine if there is too much slack by performing the exercise. As you start to move a load arm or handle, the weight stack should lift immediately. If not, the cable tension needs to be adjusted.

To adjust the cable tension, loosen the cable nut that is located on the cable bolt connected to the top plate. Tighten the cable bolt until the top plate is barely lifted off of the first weight plate and then re-tighten the cable nut.

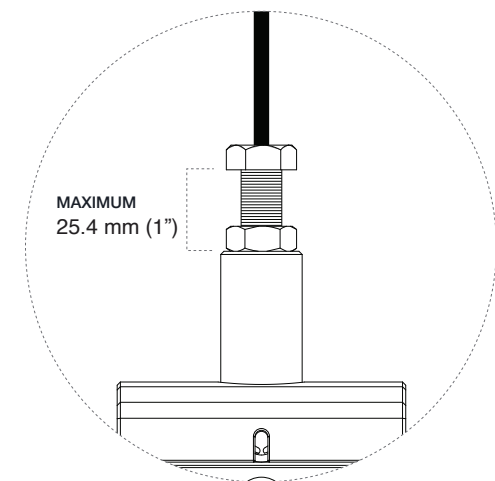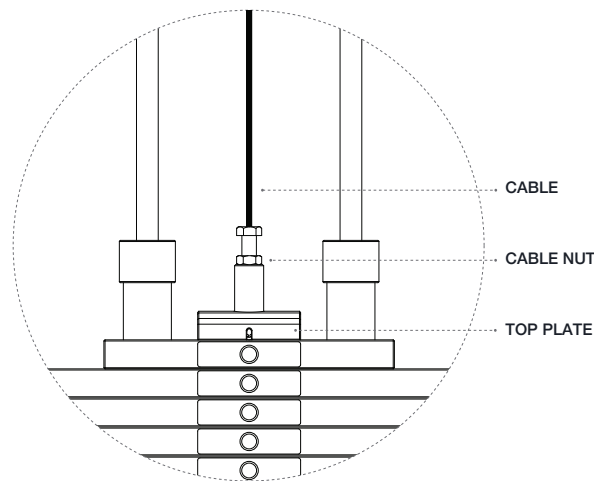

HANDLE FITTINGS (IF APPLICABLE)

Inspect the cable fittings where any handles are attached to the end of the cable. The fittings supplied with this machine are load rated snap-links. Ensure that the snap-link opens and closes easily and is fully engaged when closed. Replace the snap-link as needed.





© 2023 HealthStream Taiwan Inc.
No. 28, Jiaotuzai Boulevard, Liuying District, Tainan City 736, Taiwan
2023.12.11 Version 1.1

[INTENZAfitness.com](https://www.intenzafitness.com)