

SELECTORIZE EASE LINE OWNER'S MANUAL
ARM CURL



intenza

Table of Contents

1	IMPORTANT SAFETY INSTRUCTIONS	2
1.1	Important Operation Instructions for Owners	2
1.2	Important Safety Instructions for Users	3
1.3	Warning Label Locations	4
2	INSTALLATION AND ASSEMBLY	5
2.1	Product Information	5
2.2	Place of Installation	6
2.3	Assembly Guide	6
3	USING THE EQUIPMENT	35
3.1	Important Safety Guidelines	35
3.2	User's Guide	35
4	CARE AND MAINTENANCE	36
4.1	Commercial Maintenance Schedule	36
4.2	Daily Inspection & Maintenance	37
4.3	Weekly Inspection & Maintenance	37
4.4	Other Scheduled Preventive Maintenance	38
4.5	Clean the Equipment	38
4.6	Cable Inspection & Maintenance	39

IMPORTANT SAFETY INSTRUCTIONS

It is the sole responsibility of the purchaser of Intenza products to instruct all individuals, whether they are the end user or supervising personnel on proper usage of the equipment.

It is recommended that all users of Intenza exercise equipment be informed of the following information prior to its use.

1.1 Important Operation Instructions for Owners

Follow these guidelines to maintain proper working condition of the equipment—

IMPORTANT Do not modify the equipment or any of its parts, or permanently remove any part from the equipment. Do not use accessory attachments that are not recommended by Intenza, as such attachments might cause injuries.

- Qualified technicians must perform all regular maintenance.
- Do not remove warning labels for any reason. They contain important information. If unreadable or missing, contact your Intenza dealer for a replacement.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected.
- Make sure that trainers, facility personnel, and maintenance technicians understand how to use the equipment, know important safety guidelines, and can recognize potential problems such as loose hardware, or cracked weld. If any staff member witnesses unsafe use of the equipment, he or she should address the user directly, demonstrate the proper technique, and review the Important Safety Instructions for Users.
- Intenza recommends posting a copy of the Important Safety Instructions for Users near the equipment in a prominent location.
- Place an “out—of—order” sign on the equipment during maintenance of the equipment or the surrounding area. Users should never be allowed to operate the equipment until it has been inspected and works properly. If a piece of equipment needs service, keep it out of use until it is repaired. Place an “out—of—order” sign on the equipment and make sure the facility’s personnel know not to allow anyone to use the equipment until it is working properly.
- When working with the weight stacks, do not attempt to free any jammed assemblies without assistance as this may cause injury.
- NEVER use this machine with the weight stack pinned in an elevated position.
- Do not place the equipment outdoors or on wet surfaces.

1.2 Important Safety Instructions for Users

Read all instructions before using the equipment. These instructions were written to ensure your safety and to protect the equipment. Equipment is intended for commercial use.

Before beginning any fitness program, you should obtain a complete physical examination from your physician.


When using exercise equipment, you should always take basic precautions, including the following—

- If you do not understand how to operate a piece of equipment, ask someone from the facility such as a trainer to demonstrate how to use it and explain any safety instructions.
- Do not allow children on or near the equipment. Do not leave children unsupervised around the equipment.
- Use the equipment only for its intended purpose. Do not use accessory attachments that are not recommended by the manufacturer, as such attachments may cause injuries.
- Wear proper exercise clothing and shoes during a workout: no garments that impede perspiration and no loose clothing. Tie long hair back. Keep garments or towels away from moving parts.
- Do not overexert yourself or work to exhaustion. Use reasonable judgment when working with weights. Avoid using excessive weight, which may cause injury.
- If you feel pain, faintness, dizziness, or abnormal symptoms, stop exercising immediately and consult your physician.
- Keep head, limbs, fingers, and hair clear of all moving parts while the equipment is in use. Keep hands clear of racking pegs.
- Never drop or insert objects into any opening in the equipment.
- Check that all fasteners are securely tightened. Cables should be secured at both end connections and properly threaded. Weight stacks should be secure and functioning properly. Handle attachments should be properly connected. Pay particular attention to the condition of cables and cable ends. If you notice a loose cable end or any fraying of the cable or cable jacket, do not use the product and contact someone in the facility immediately.
- Always check the equipment before using it. If you spot a potential problem, contact someone in the facility immediately. Do not use the equipment until the facility has verified that the equipment is working properly. Do not attempt to fix broken or jammed equipment.
- Do not use the equipment outdoors or on wet surfaces.
- Do not drop or slam the weight stack while exercising.
- Be sure the selector pin is completely inserted. Use only the pin provided by the manufacturer. If unsure, contact someone in the facility.
- Never pin the weights in an elevated position. Do not use the equipment if the top plate or weight stack is pinned in a raised position. Notify the facility's personnel to repair the equipment and ensure that it is working properly.

1.3 Warning Label Locations

WARNING

During all operations involving transport, maintenance and cleaning, pay attention to any part of the equipment where body parts may become trapped. Attention must be paid to the labels attached to the equipment, as they provide information about possible risks and hazards. We recommend immediately replacing the labels when they become damaged or difficult to read.

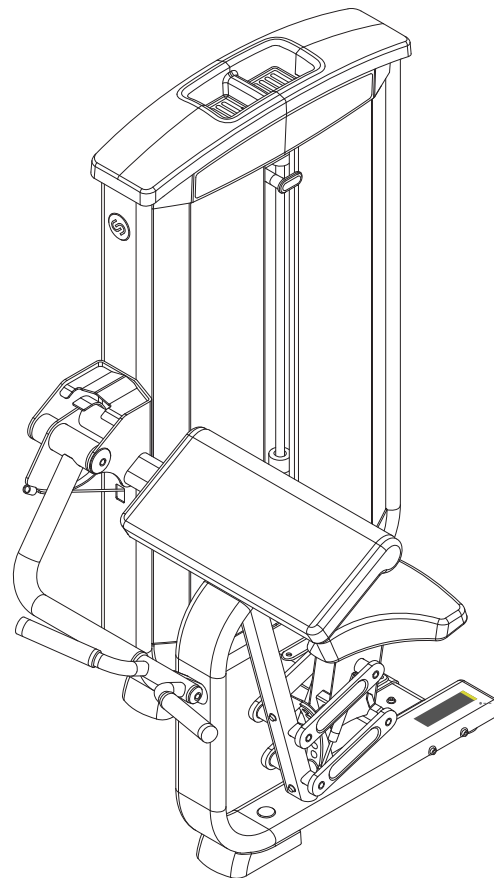

 **WARNING**

SERIOUS INJURY CAN OCCUR ON THIS EQUIPMENT. YOU MUST FOLLOW THESE PRECAUTIONS TO AVOID INJURY !

- 1.Before using,read all the warnings and obtain instruction on the use of this machine. Use only for intended exercise. **DO NOT** modify the machine.
- 2.Obtain a medical exam before beginning any exercise program.
- 3.Children must not be allowed near this machine. Supervise teenagers.
- 4.Inspect the machines before use.**DO NOT** use if it appears damaged.**DO NOT** attempt to fix a broken or jammed machine. Notify staff immediately.
- 5.Inspect cables and their connections before using machine. **DO NOT** attempt to fix. Seek assistance.
- 6.Keep body,hair and clothing free of all moving objects.
- 7.Be certain that weight pin is completely inserted. Use only the pin provided by the manufacturer,if unsure,seek assistance.
- 8.Never pin the weights or prop plate into an elevated position. **DO NOT** use the machine if found in this condition. **DO NOT** attempt to fix,Seek assistance.
- 9.Use only the incremental weights supplied by the manufacturer. **DO NOT** use dumbbells or other means to add resistance to the machine.
- 10.**DO NOT REMOVE THIS LABEL. REPLACE ,IF DAMAGED.**

2. Installation and Assembly



2.1 Product Information

SERIAL NUMBER LABEL LOCATION


A	Manufacturer's name
B	Model number
C	Serial number
D	Consultation of user manual required

ASSEMBLY DIMENSIONS

LENGTH	139 cm	54.7 inches
WIDTH	95 cm	37.4 inches
HEIGHT	150 cm	59 inches
EQUIPMENT WEIGHT	204.1 kg	449.9 lbs
WEIGHT STACK	109 kg	240 lbs
LIVE AREA	246 x 156 cm	97 x 61 inches

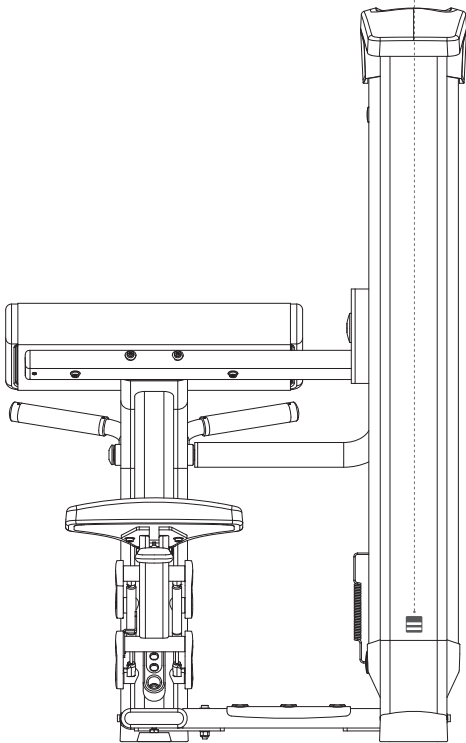

LIVE AREA

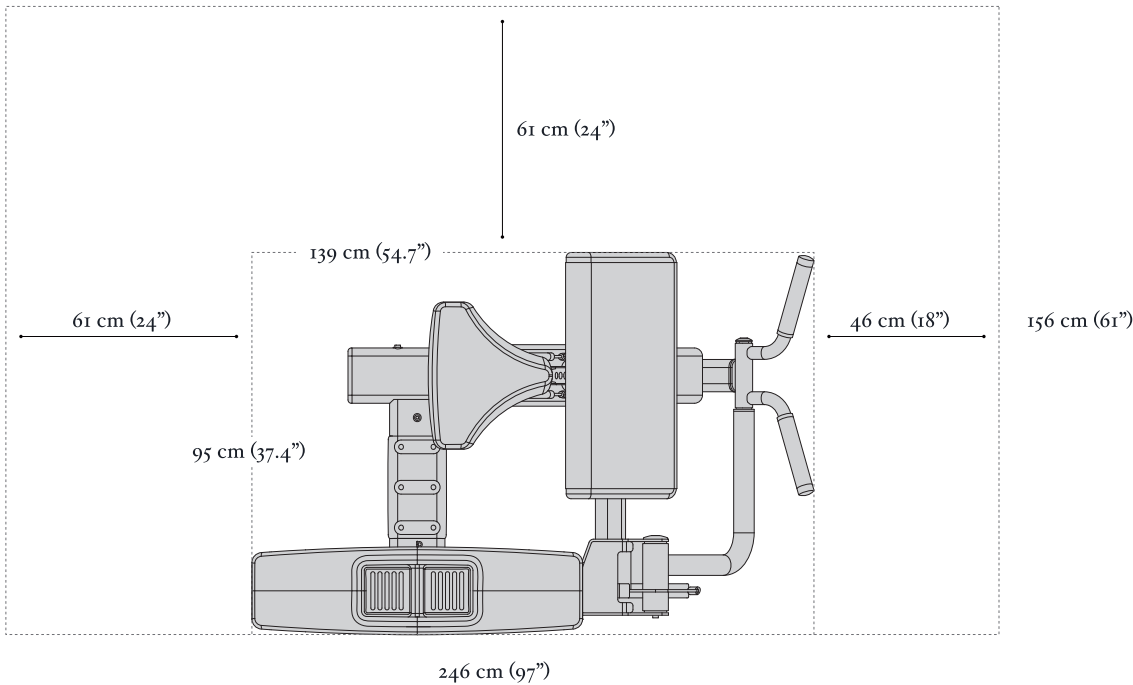

2.2 Place of Installation

To ensure safe, comfortable and effective use of the equipment, the place of installation must comply with certain specific requirements. In particular, before choosing where to install the equipment we recommended that you check the following conditions are available—

- A temperature between +10°C and +25°C.
- Sufficient ventilation to maintain a humidity level between 20% and 90%, when the equipment is in use.
- Sufficient lighting to make the area a safe and relaxing place to exercise.
- Sufficient clearance on all sides of the equipment, taking into account its maximum dimensions when in use, to ensure safety.
- A flat, stable and vibration—free floor surface, with sufficient load bearing capacity for the equipment's weight.
- If the equipment is to be installed in a public recreation area, the place of installation must comply with all the requirements of the regulations currently in force.

WARNING

The equipment must be installed and used in a place where access and supervision are specifically controlled by the owner. When installing the equipment, use suitable personal protective equipment.

2.3 Assembly Guide

UNPACKING

Thank you for purchasing a Intenza product. Your Intenza product is inspected before it is packaged. It is shipped in multiple pieces to facilitate the compact packaging of the machine. Prior to assembly, confirm all the components by matching them with the part list. Carefully unpack the unit from this box and dispose of the packing materials in accordance with your local laws.

CAUTION

The weight of the product is heavy. To avoid injury to yourself and prevent damage to the frame components, be sure to have proper assistance removing the frame pieces from this box. Please be sure to install the equipment on a stable base, properly level the machine and leave at least two feet of clearance to enter and exit the machine.

2.3 Assembly Guide


TOOLS




1. Allen wrench
4 mm, 5mm, 6mm



2. Screwdriver




3. Open wrench/Adjustable wrench
17 mm, 19mm



3. BC Frame
QTY 1




4. Washer, 3/8" SAE Curved
QTY 6



5. Bolt, 3/8—16 x 6—1/4"(159mm)
Socket head W/NP
QTY 4




6. Washer, flat 3/8 SAE ST ZN
QTY 21




7. Bolt, 3/8—16 x 2—1/2"(64mm)
Socket Head
QTY 5




8. Nut, 3/8—16 x 11t LK ST ZN
QTY 7




9. Bolt, 3/8—16 x 2—3/4"(70mm)
Socket Head
QTY 2



10. WLDMT, BC Pivot Arm Support
QTY 1




11. Plate, Backing
QTY 2




12. BC Pad Support
QTY 1

PART LIST




1. BC Tower
QTY 1




2. BC Frame Connector
QTY 1


2.3 Assembly Guide




**13. Bolt, 3/8—16 x 4"(102mm)
Socket Head W/NP
QTY 2**




**14. Bolt, 3/8—16 x 1—1/4" (32mm)
Socket Head W/NP
QTY 5**




**15. BC Pivot Arm
QTY 1**




**16. Cap, AL End Pivot Point
QTY 1**




**17. Bolt, 3/8—16 x 1" (25mm)
Socket Head W/NP(black)
QTY 1**




**18. BC Handle
QTY 1**




**19. Cap, AL End
QTY 1**




**20. Bushing, Stop
QTY 1**




**21. Cover, Tower Base
QTY 1**



**22. Screw, 10—32 x 1/2" (12mm)
Pan Head W/NP
QTY 12**




**23. Guide Rod, 19 DIA x 1315
QTY 2**




**24. 15 lb Weight Plate
QTY 15**



**25. 15 lb Plate Head Plate
QTY 1**




**26. 7.5lb INC. Weight
QTY 1**




**27. Cushion, Weight Stack
QTY 2**

2.3 Assembly Guide




28. Shaft Collar, Guide Rod
QTY 2




29. Bushing, Guide Rod Retainer
QTY 2



30. Cable, 2373L
QTY 1



31. Bushing, Cable
QTY 1



32. Bolt, 3/8—16 x 1—1/2"(38mm)
Socket Head
QTY 4



33. Shroud, Tower Front (R)
QTY 1




34. Shroud, Tower Front (L)
QTY 1




35. Label, Weight Stack 15lbs
QTY 1



36. Mount, 19mm ID Standoff
QTY 4



37. Rear Shroud
QTY 1




38. Tower Cap
QTY 1




39. BC Placard, Front
QTY 1



40. BC Placard, Back
QTY 1




41. Tray, Tower Cap
QTY 2




42. Pad, Arm
QTY 1


2.3 Assembly Guide




**43. Bolt, 3/8—16 x 2—3/4"(70mm)
Socket Head W/NP
QTY 2**



**44. Pad, Small Seat
QTY 1**



**45. Bolt, 3/8—16 x 1" (25mm) Socket
Head W/NP(silvery)
QTY 2**




**46. Bracket, Cable Fix
QTY 1**

2.3 Assembly Guide

STEP 1


LOOSELY tighten the bolt connections for this step

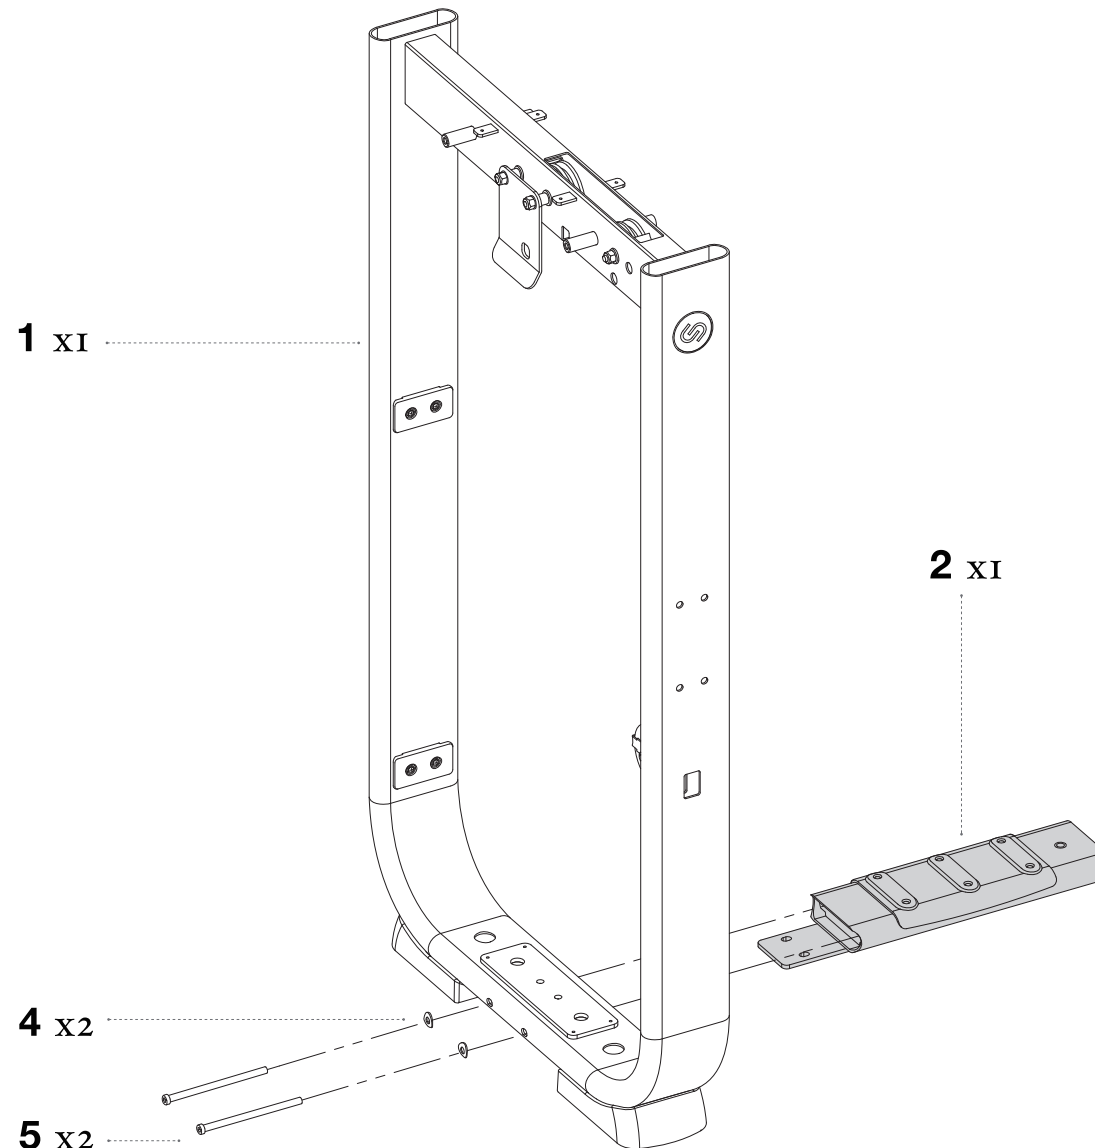

2.3 Assembly Guide

STEP 2


LOOSELY tighten the bolt connections for this step

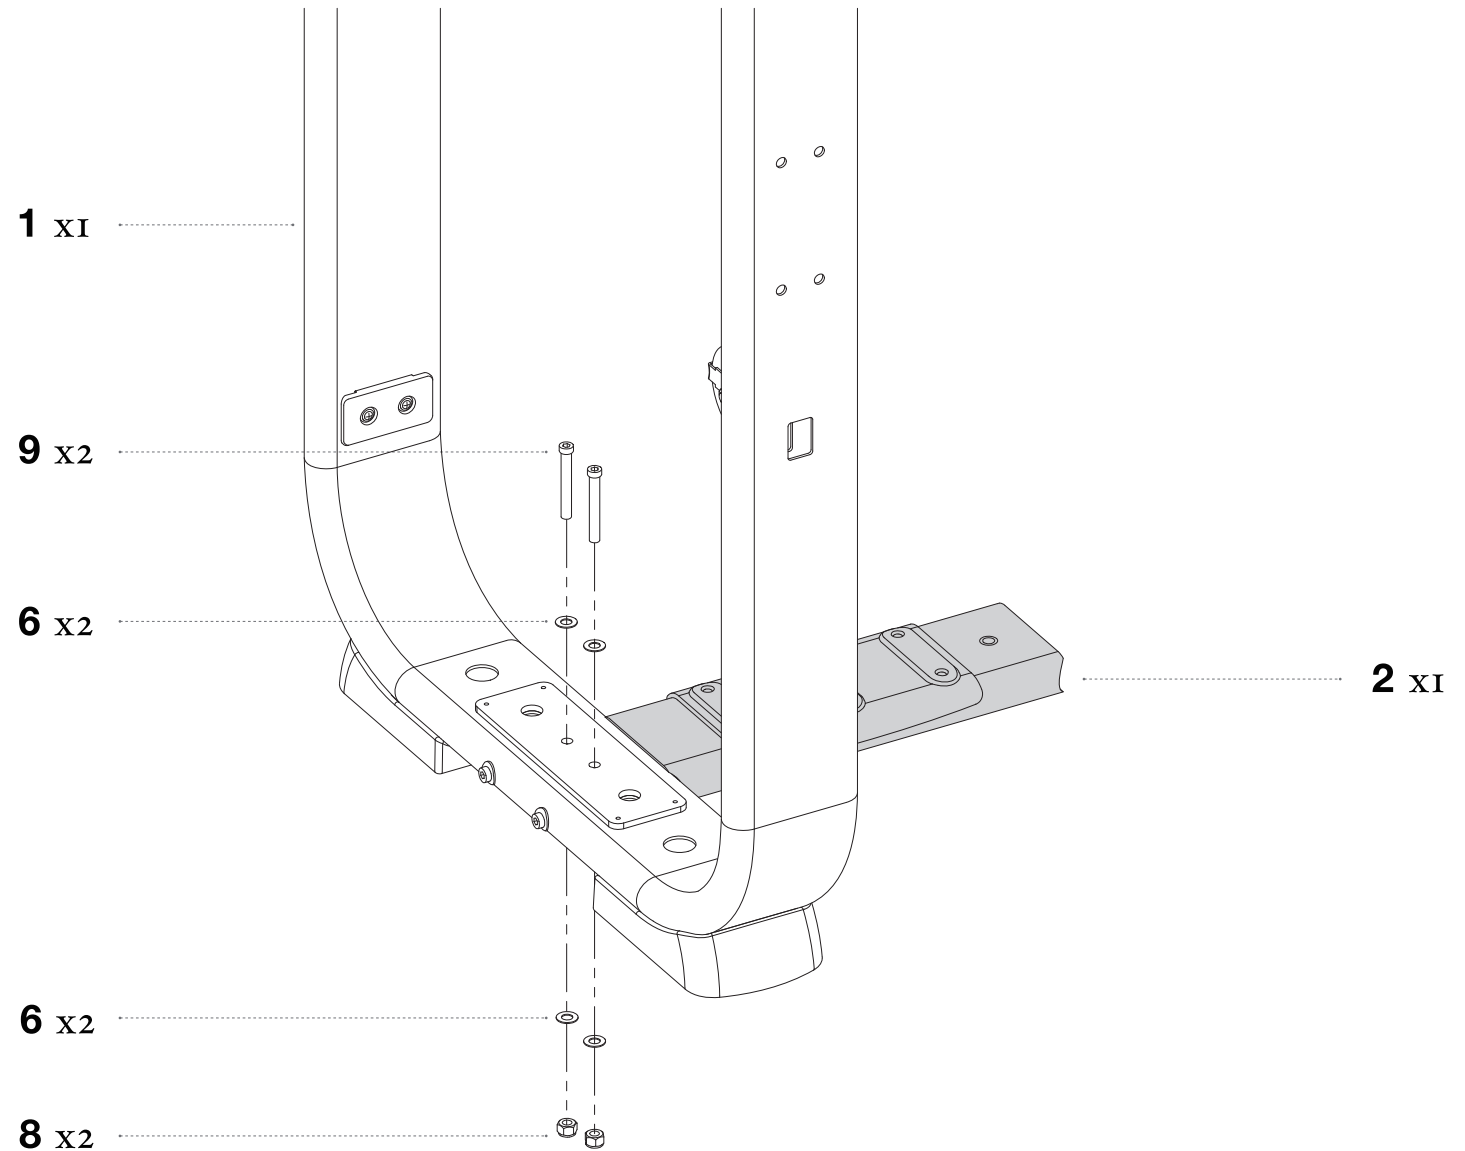

2.3 Assembly Guide

STEP 3


LOOSELY tighten the bolt connections for this step

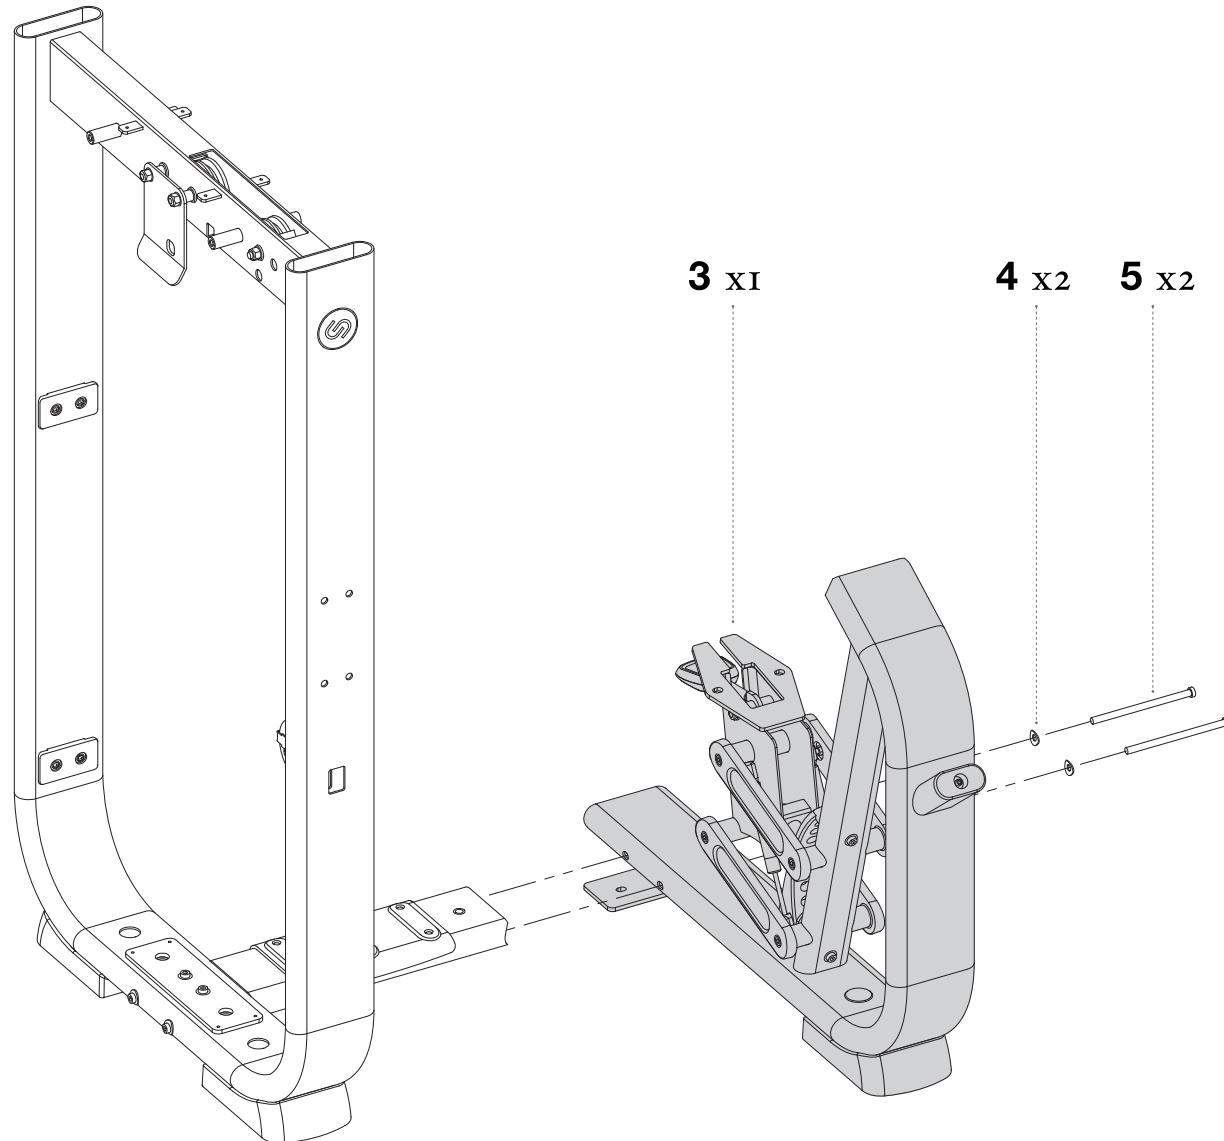

2.3 Assembly Guide

STEP 4

LOOSELY tighten the bolt connections for this step

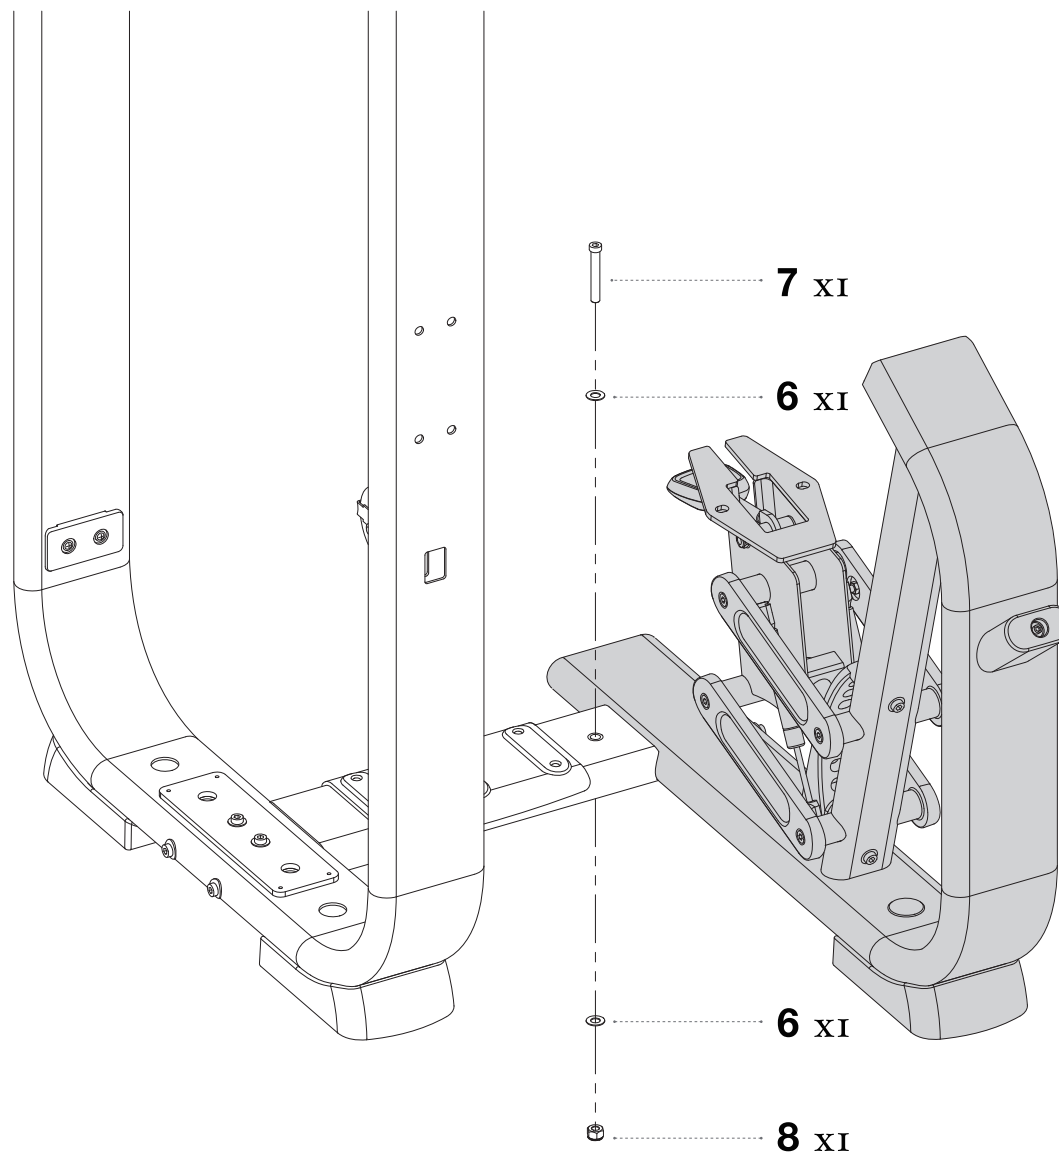


2.3 Assembly Guide

STEP 5

LOOSELY tighten the bolt connections for this step.


Some parts have been hidden for assembly clarity.

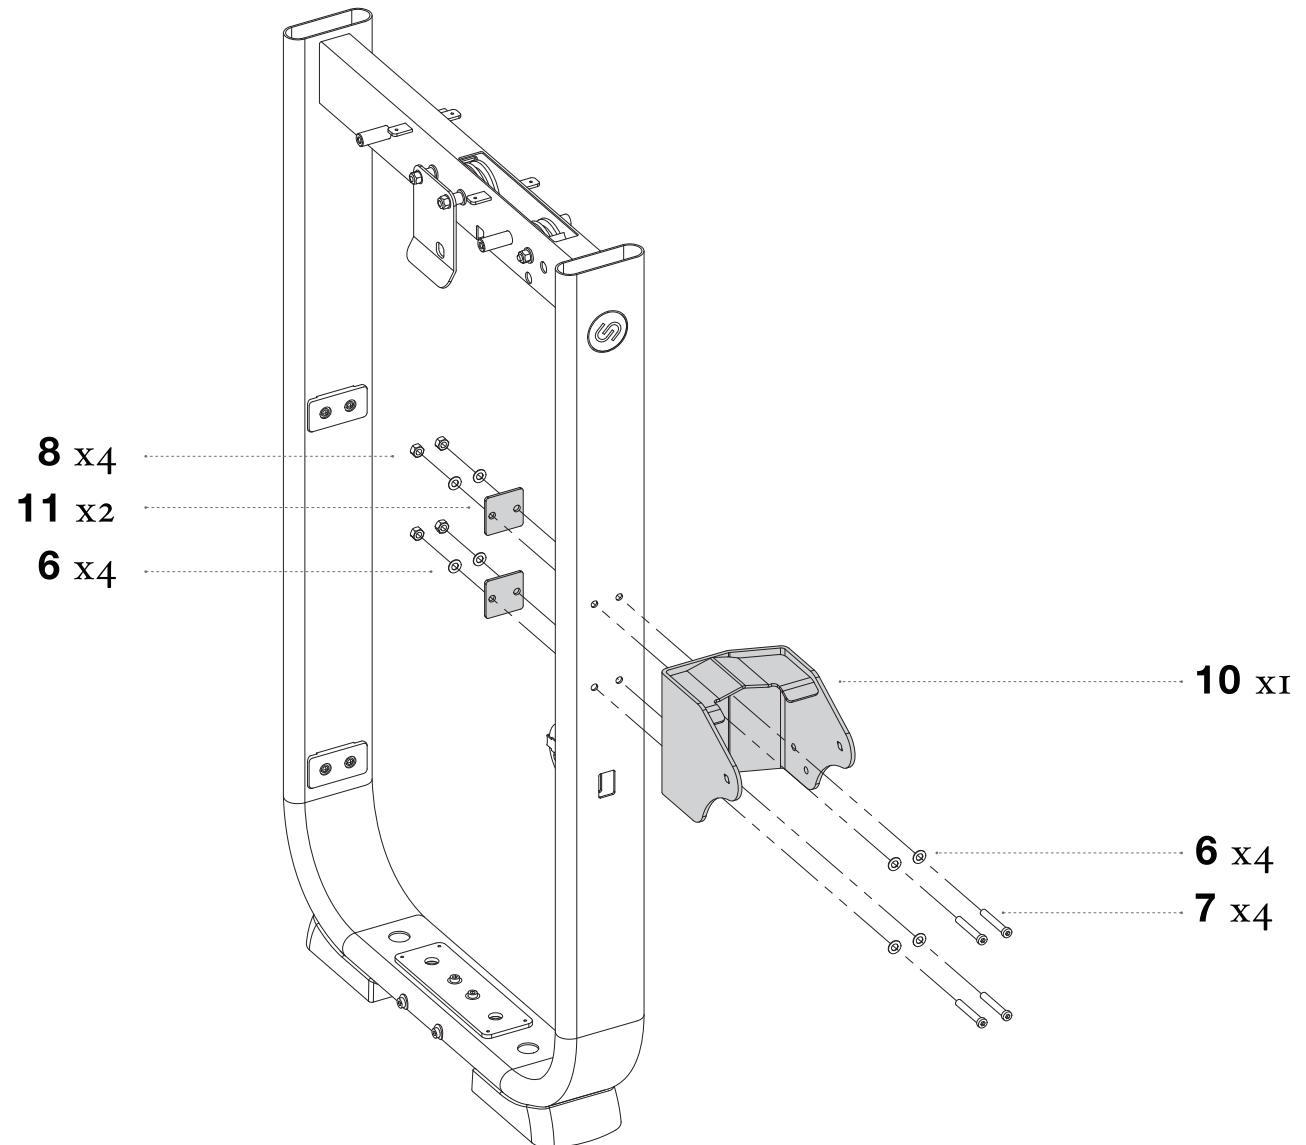

2.3 Assembly Guide

STEP 6


LOOSELY tighten the bolt connections for this step

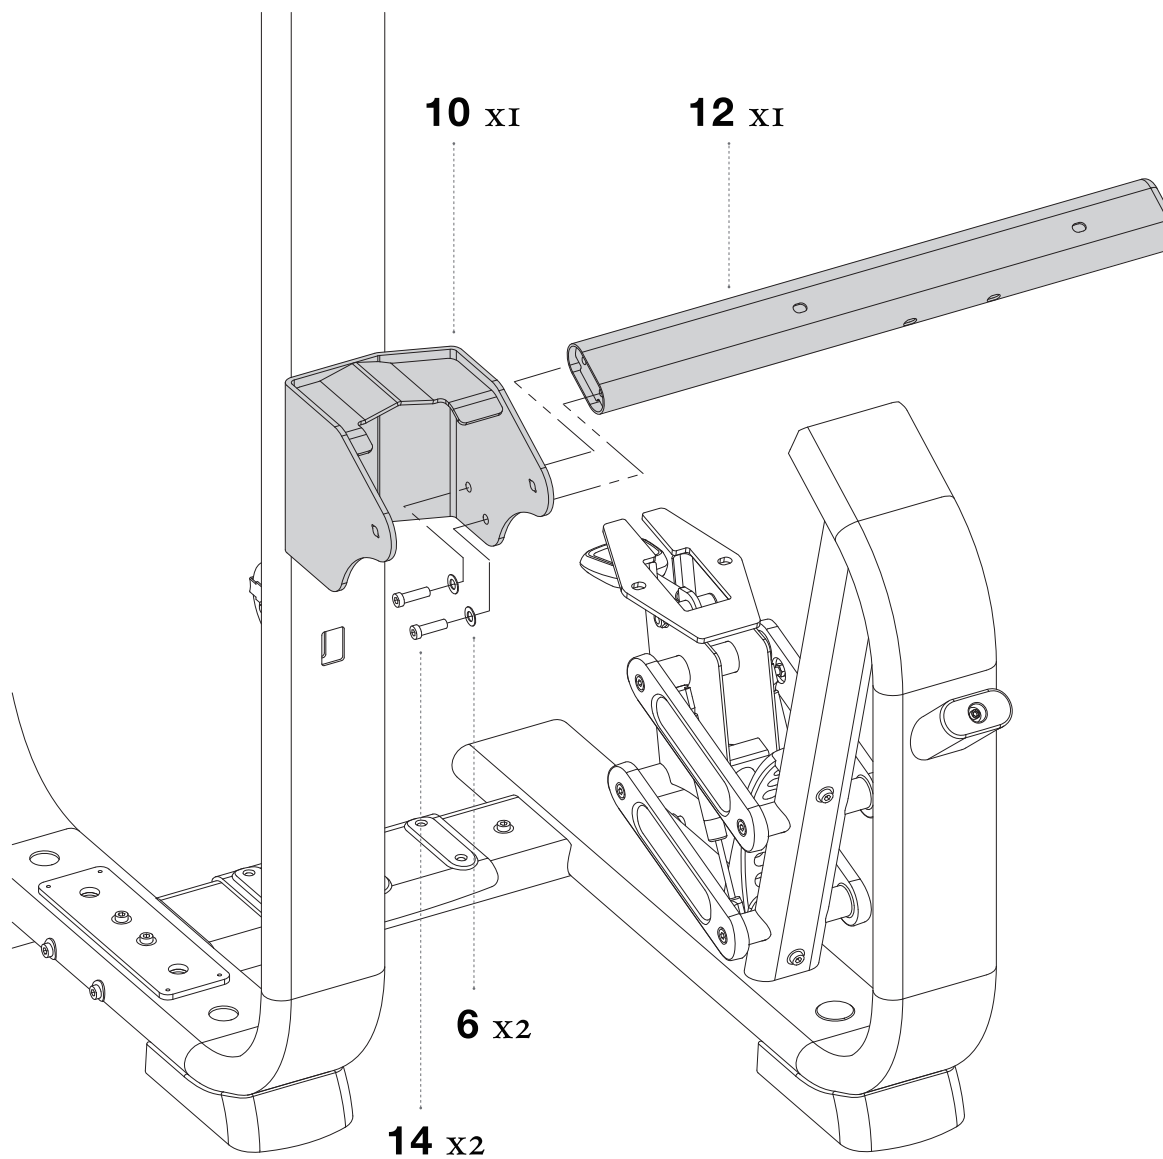

2.3 Assembly Guide

STEP 7


SECURELY tighten all bolt connections from step 1 and 7

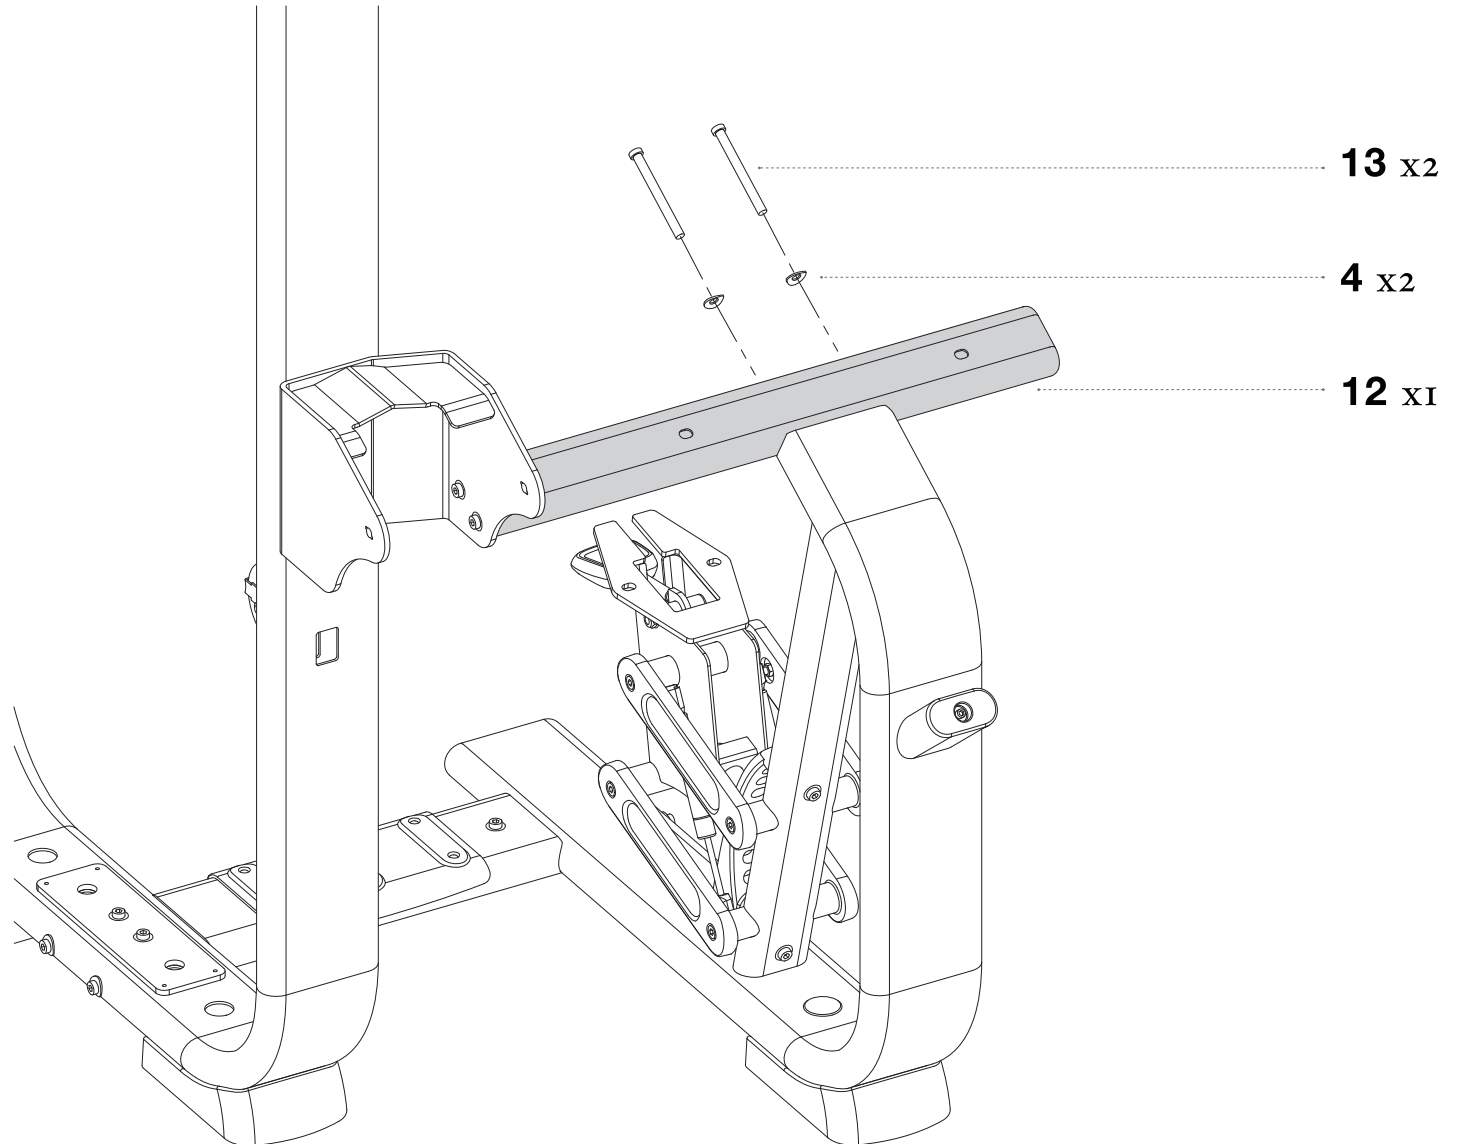

2.3 Assembly Guide

STEP 8


SECURELY tighten all bolt connections

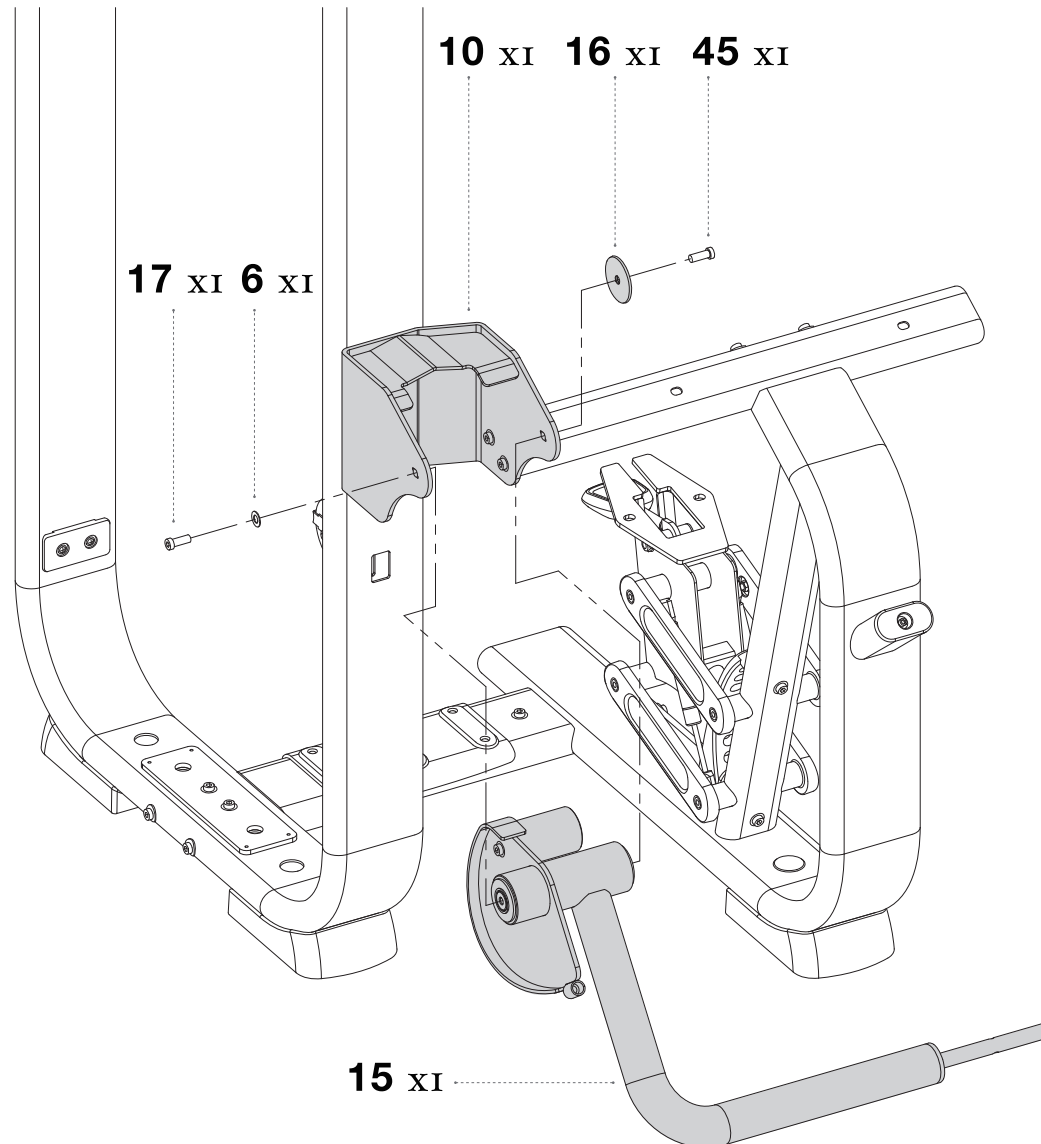

2.3 Assembly Guide

STEP 9


LOOSELY tighten the bolt connections for this step

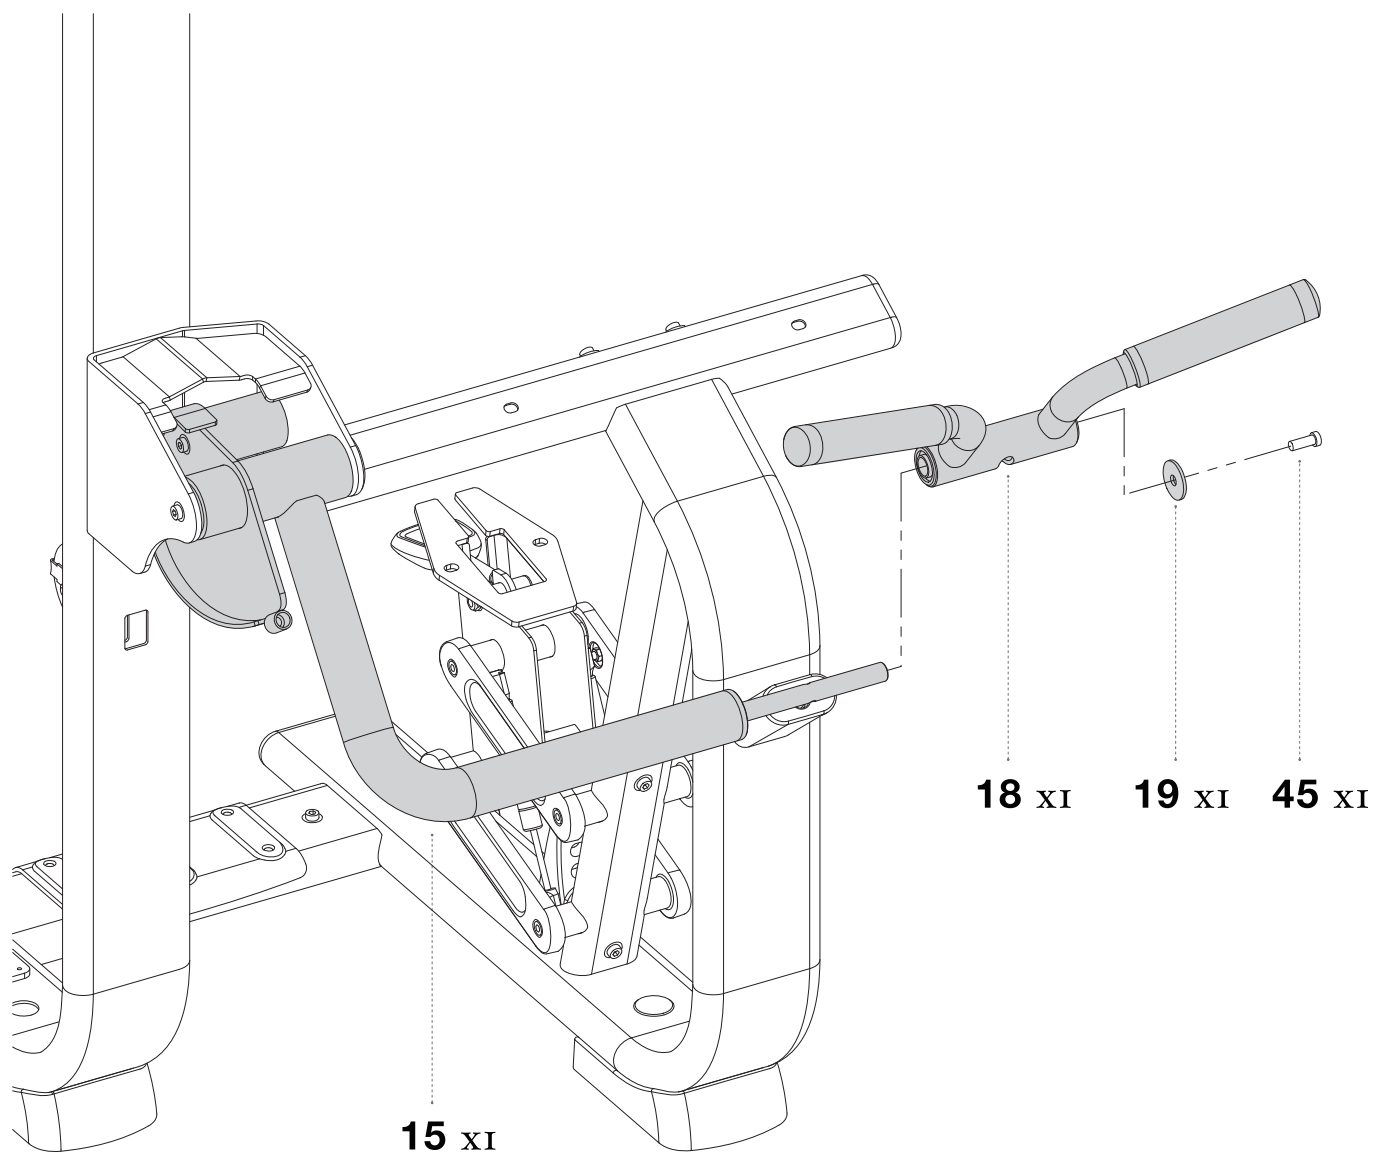

2.3 Assembly Guide

STEP 10

SECURELY tighten all bolt connections from step 9 and 10

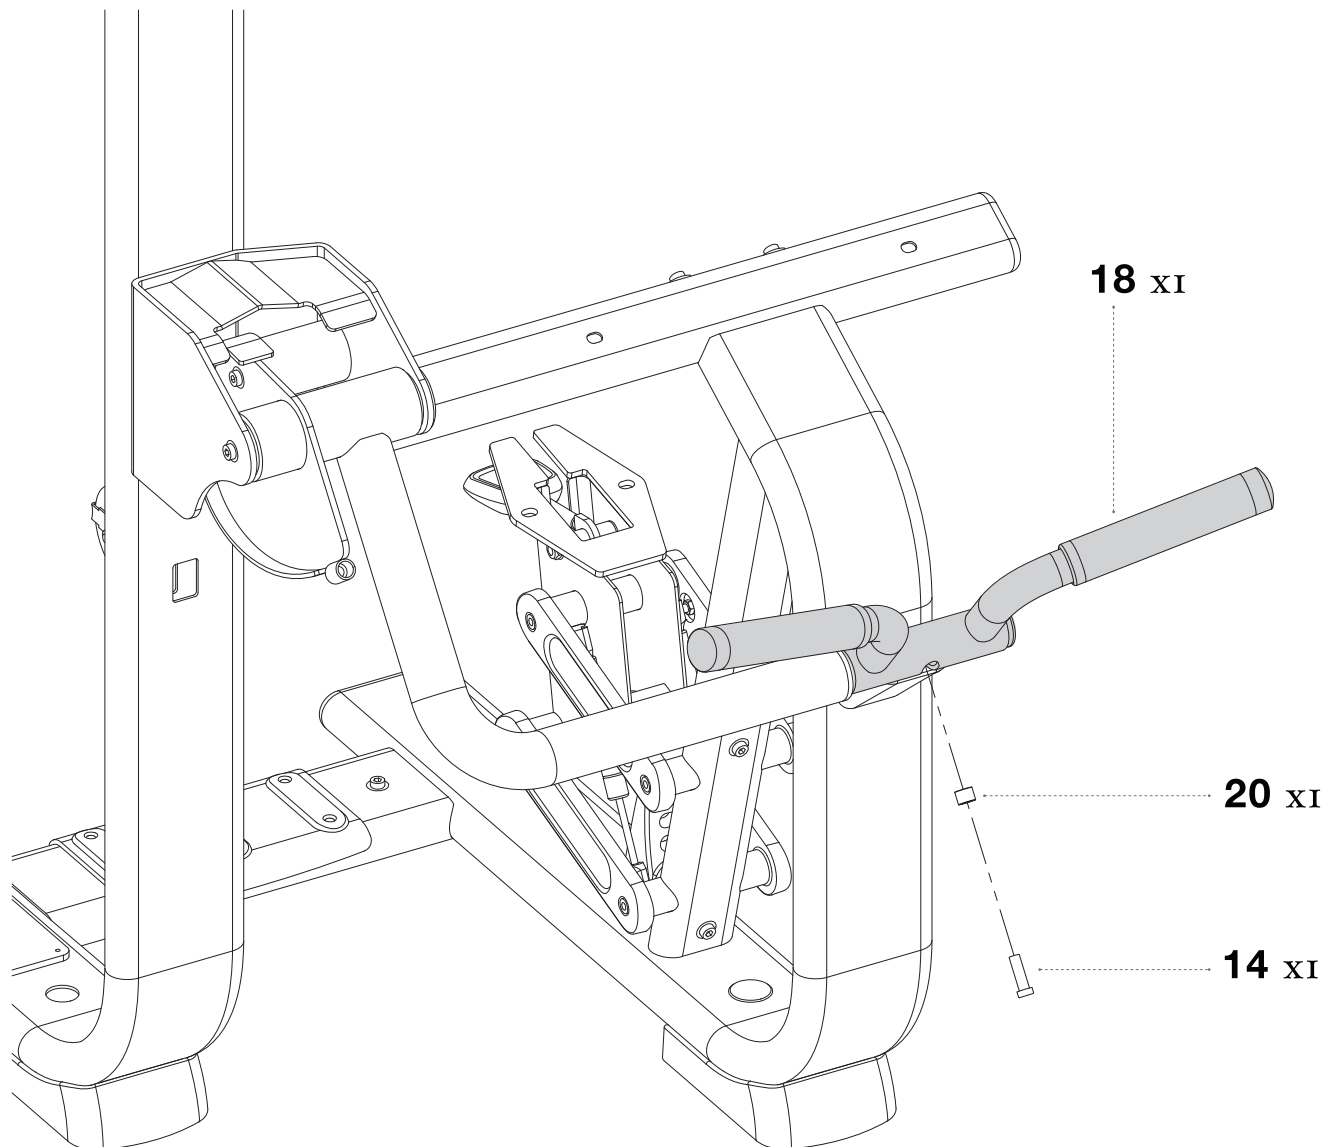

2.3 Assembly Guide

STEP 11



SECURELY tighten all bolt connections.

If machine will be anchored to the floor, this must be done before the Weight Stacks(24) are assembled..

Securely anchor machine to the floor using the ANCHOR HOLES provided.

Consult a professional contractor for the actual anchoring of the machine.

Some parts have been hidden for assembly clarity.

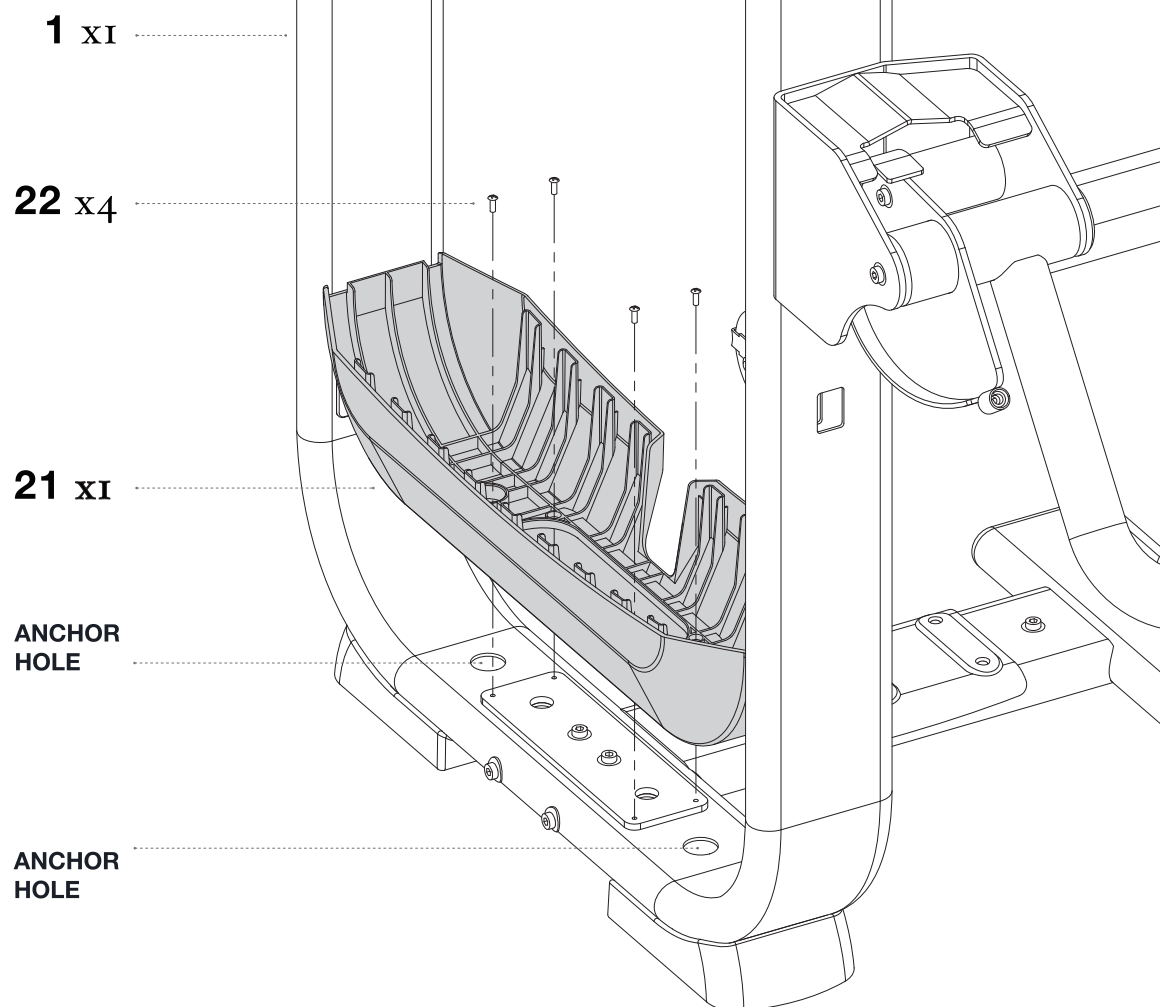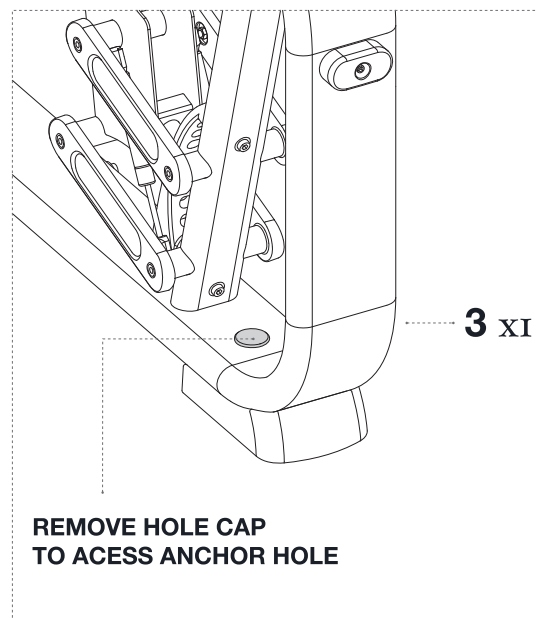


2.3 Assembly Guide

STEP 12—1

Some parts have been hidden for assembly clarity

23 X2
GREASE THE 2 GUIDE RODS
BEFORE ASSEMBLING


27 X2

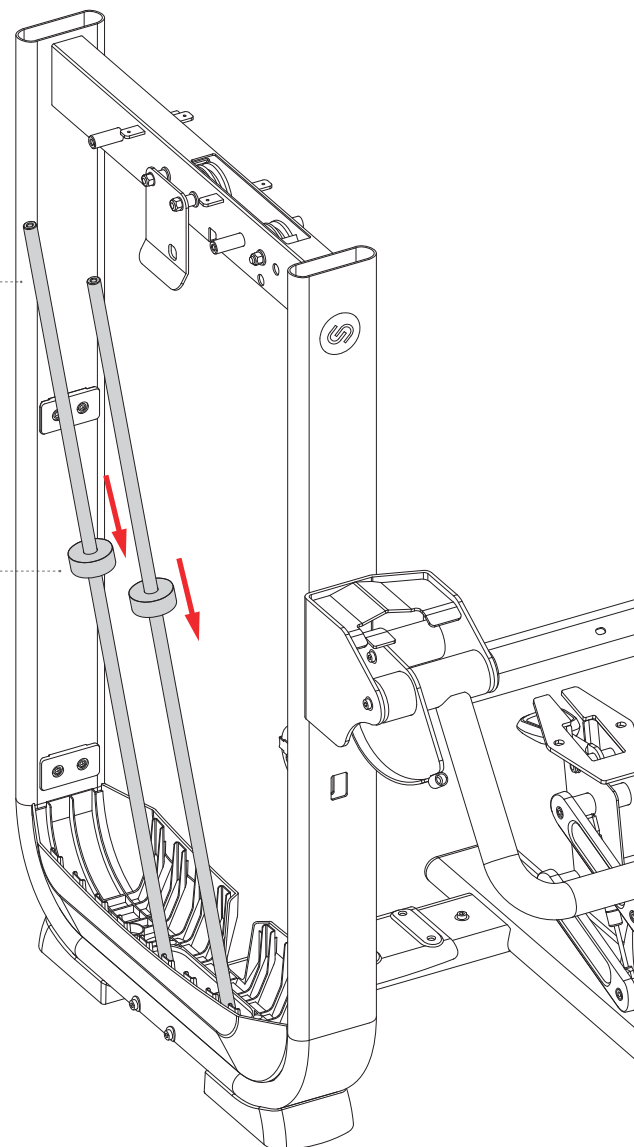

2.3 Assembly Guide

STEP 12—2


Some parts have been hidden for assembly clarity

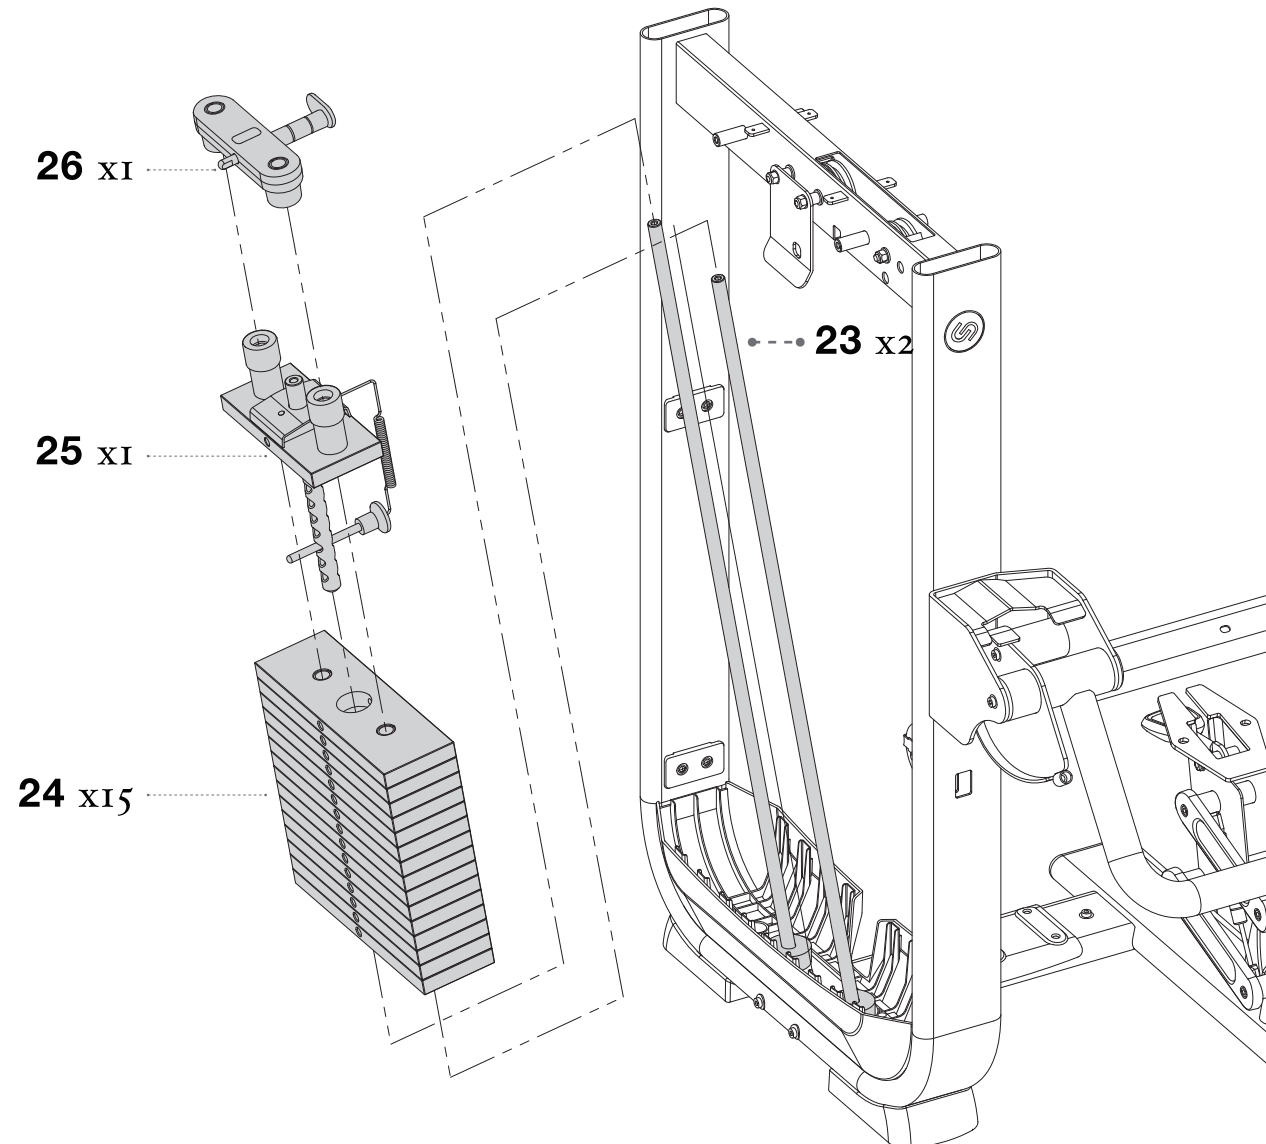

2.3 Assembly Guide

STEP 12—3



Some parts have been hidden for assembly clarity

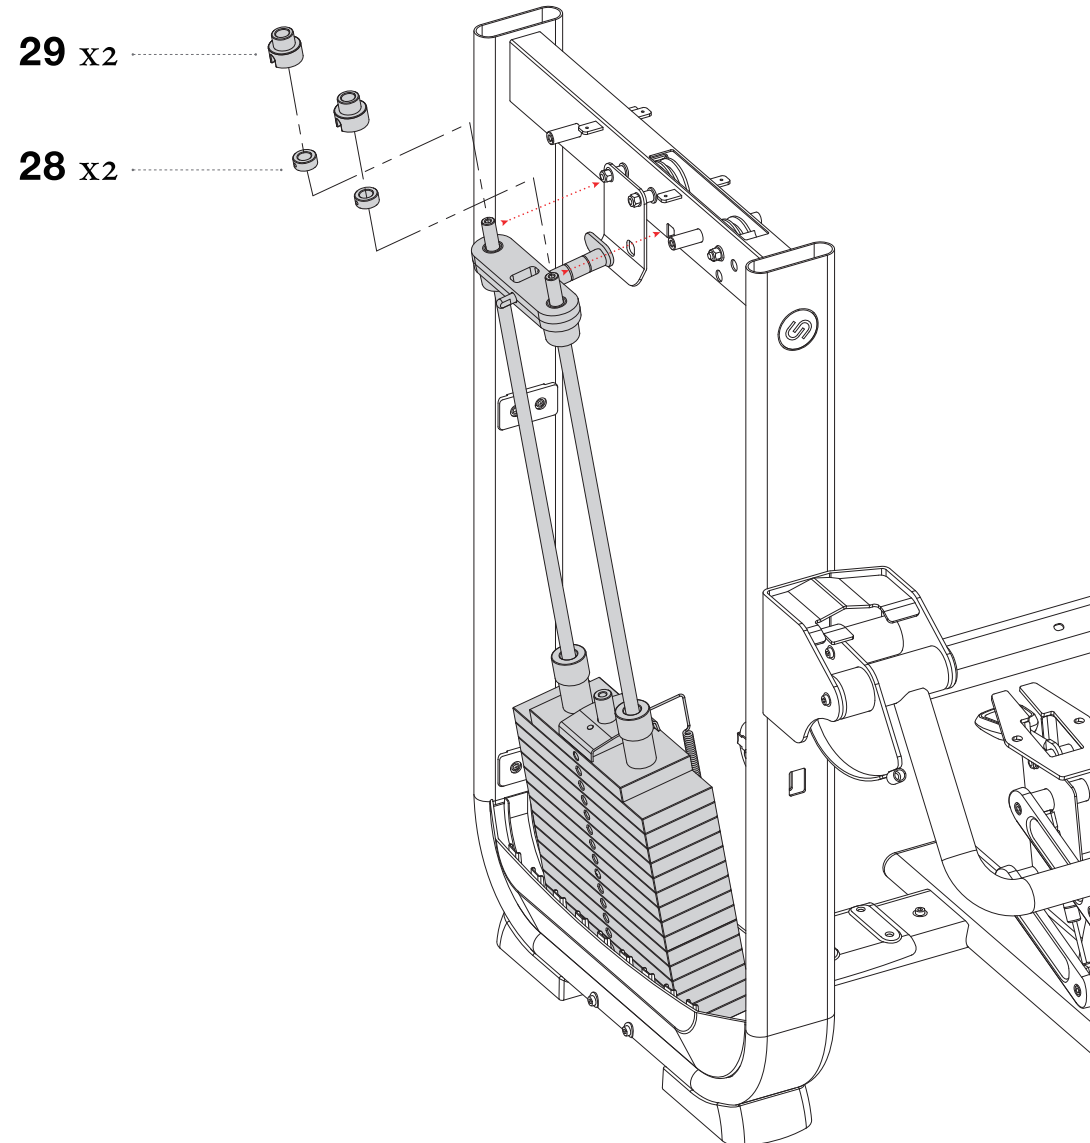


2.3 Assembly Guide

STEP 12—4


CHECK whether the Weight Stacks(24) are in the right position by inserting the pin in all pin holes after assembling.

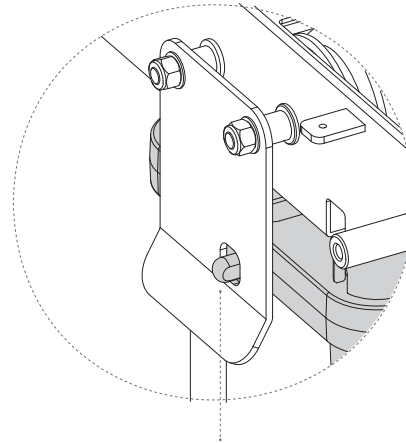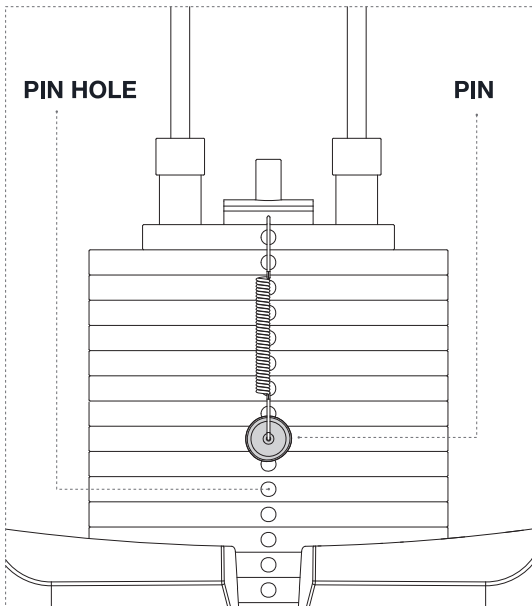

**REMEMBER TO INSERT
THE PIN IN THE BRACKET HOLE**

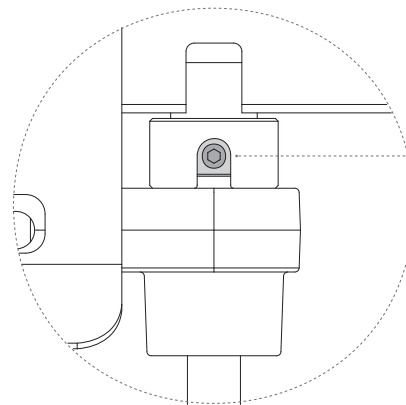

**USE M4 ALLEN WRENCH TO SECURE
THE SET SCREWS IN THE SHAFT COLLARS(28)
AFTER EVERY PART BEING POSITIONED**

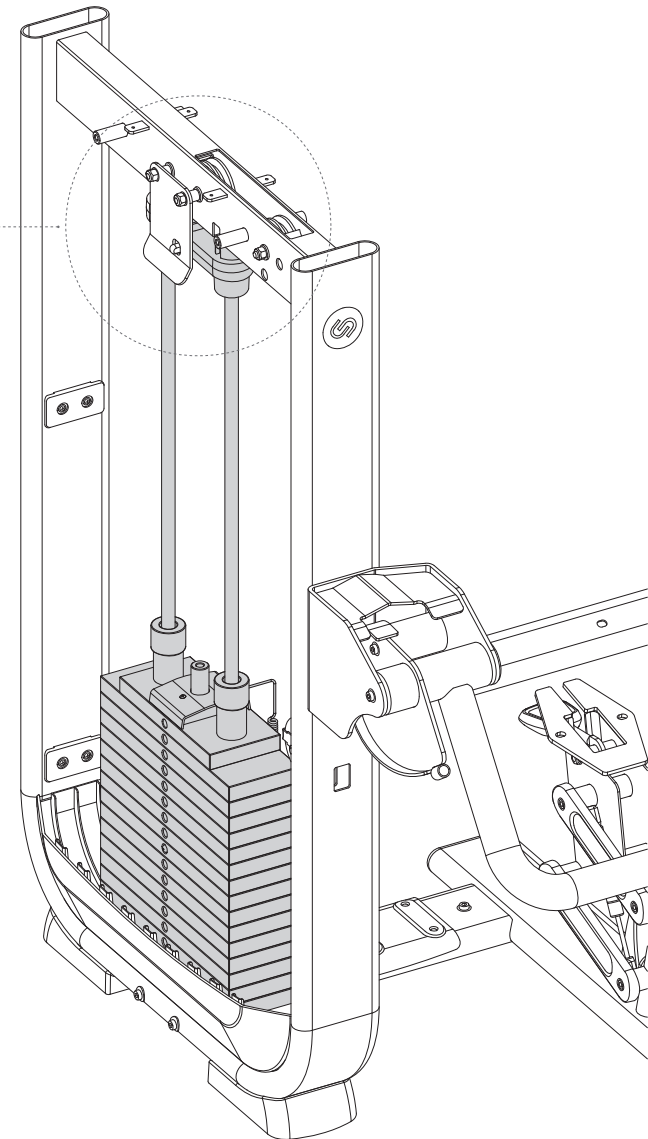




2.3 Assembly Guide

STEP 13—1

No more than 1 inch (25.4 mm) of the threaded portion of the cable bolt should be visible.

Follow the direction of arrows as shown to route the cable.

Make sure the cable is routed in the groove of pulley.

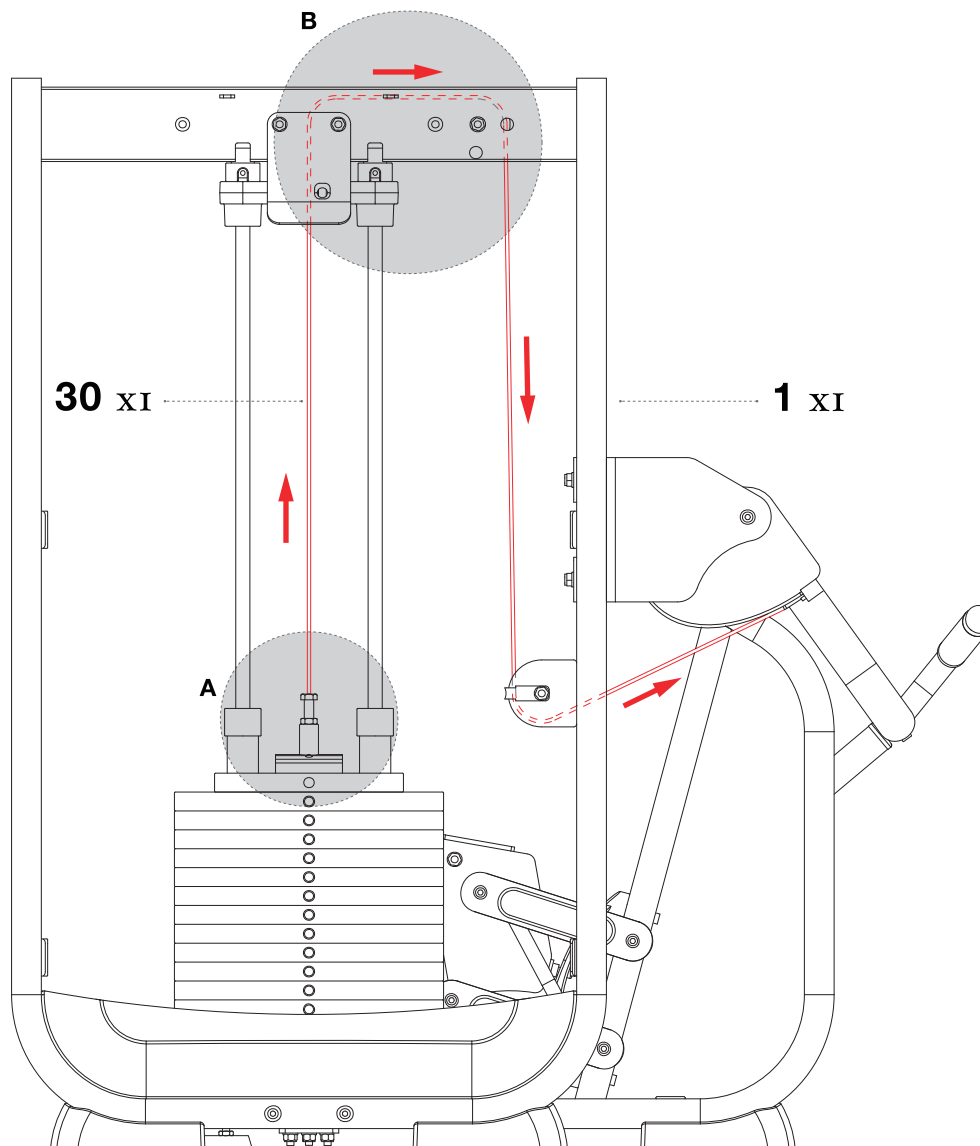
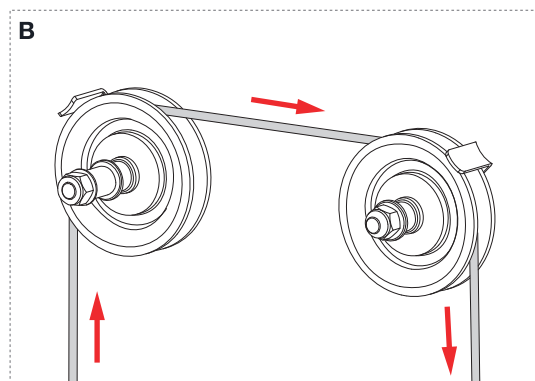
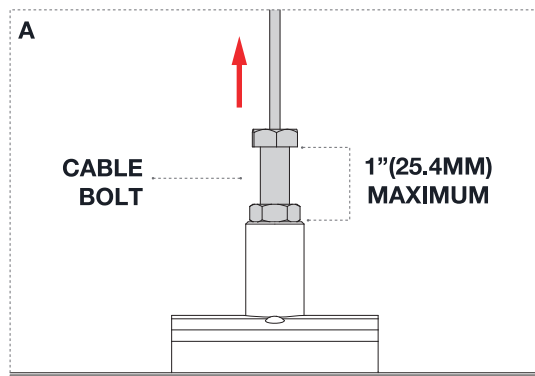


2.3 Assembly Guide

STEP 13—2

Follow the direction of arrows as shown to route the cable.

Make sure the cable is routed in the groove of pulley.

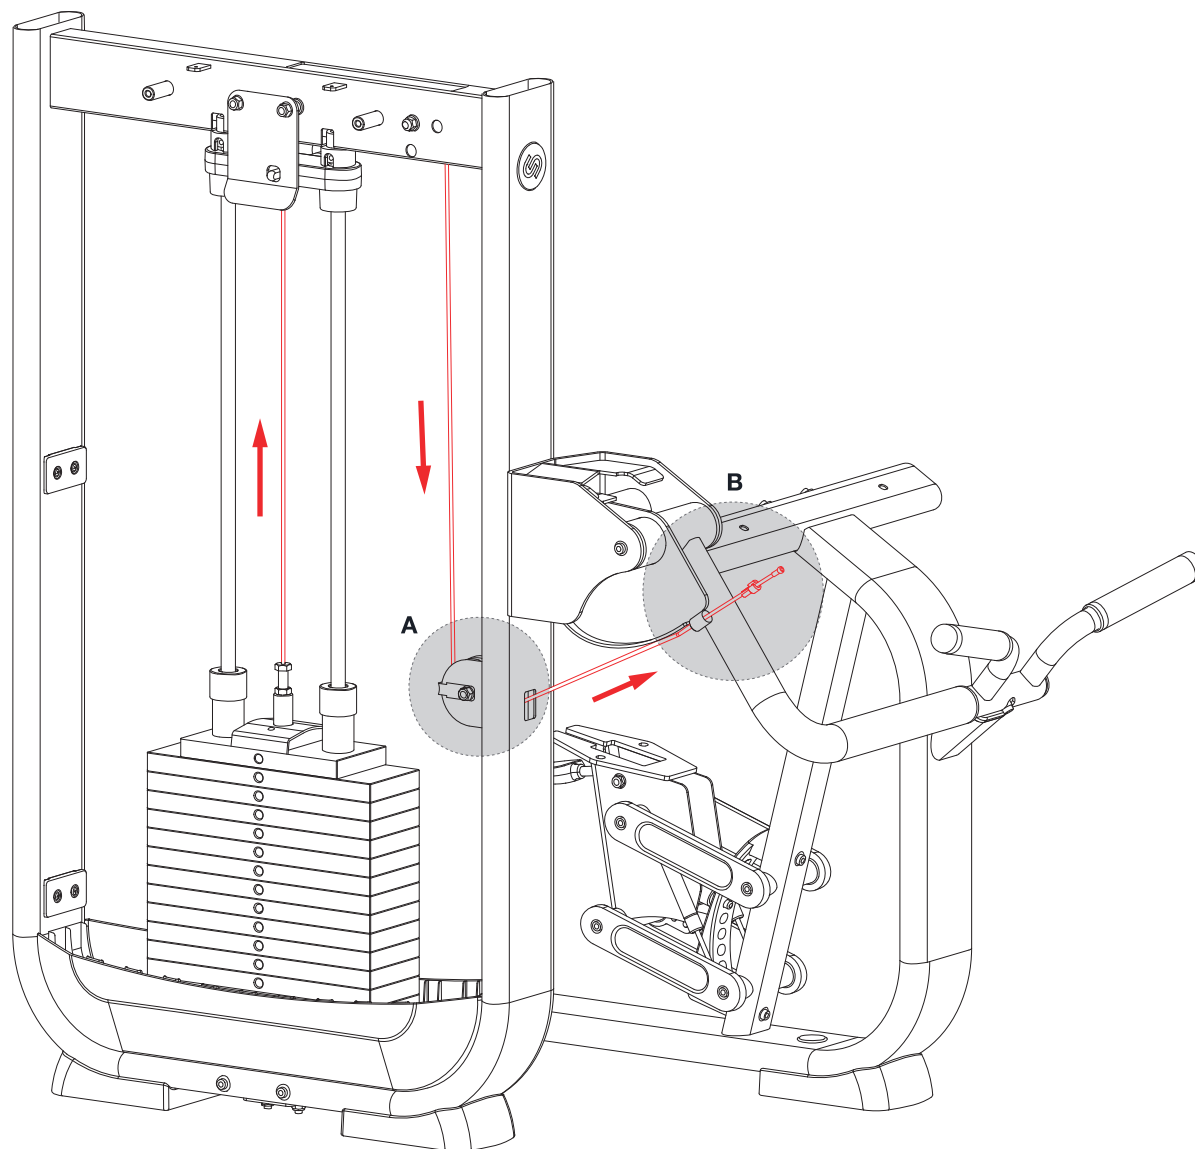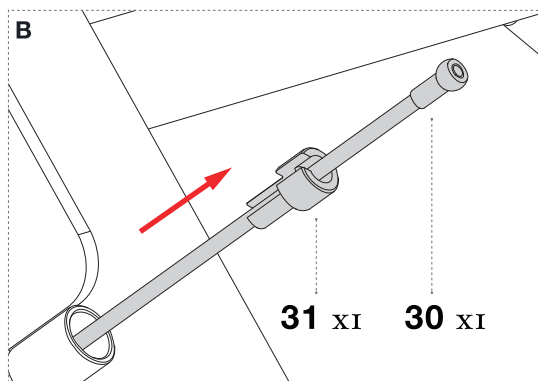
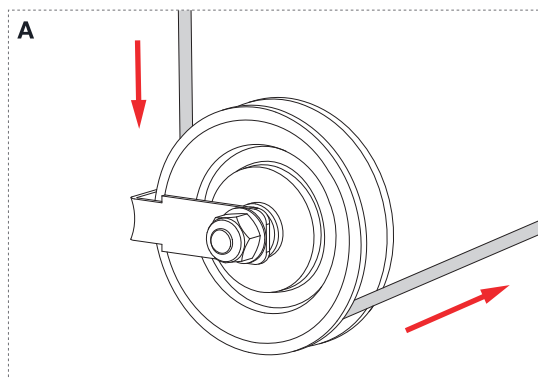


2.3 Assembly Guide

STEP 14

Assemble the Bracket(46) on the WHITE MARK on the Cam(15), then tighten the four screws of the Bracket(46) to position it.

DO NOT tighten the screws too tightly to cause the Cam(15) to deform.

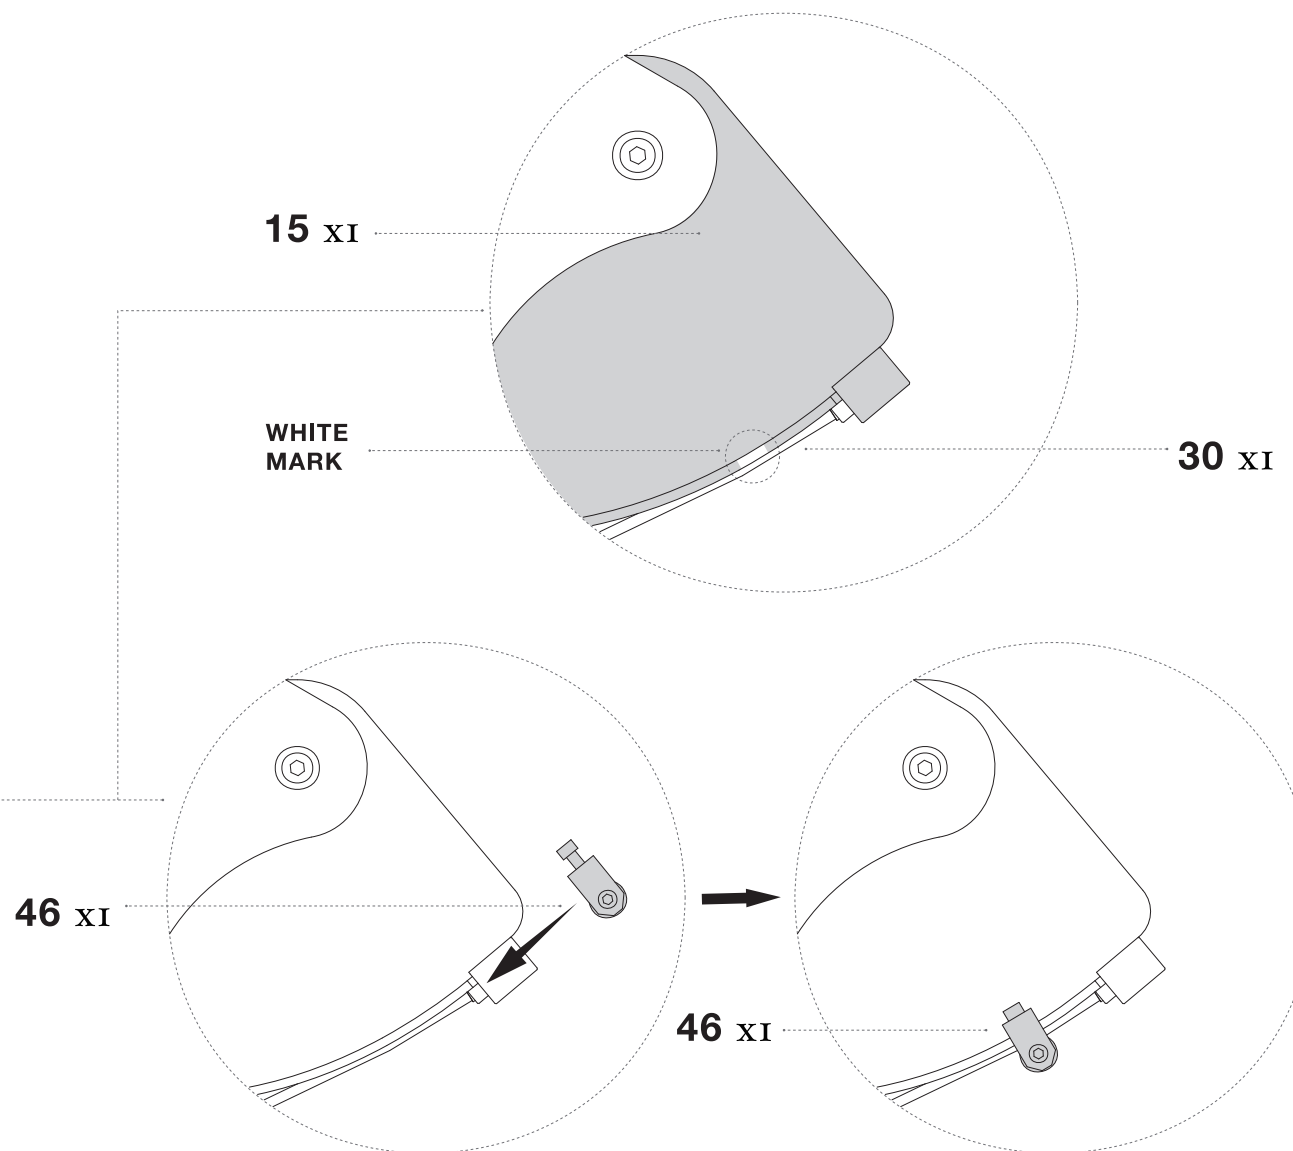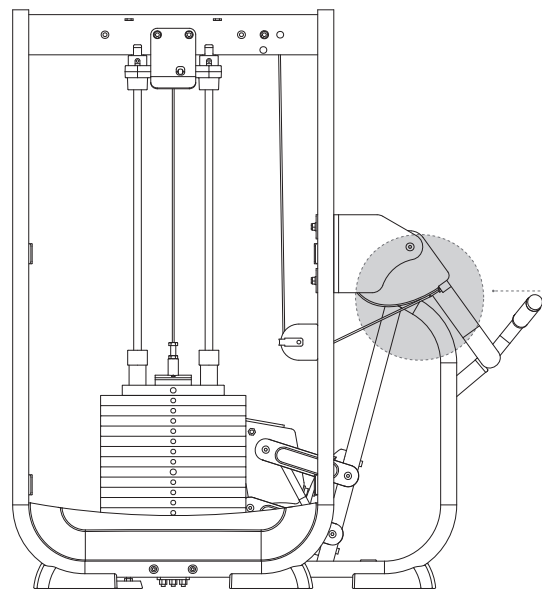


2.3 Assembly Guide

STEP 15

Remember to stick the WEIGHT STACK LABEL(35) before assembling the Front Shrouds(33, 34).


Some parts have been hidden for assembly clarity.

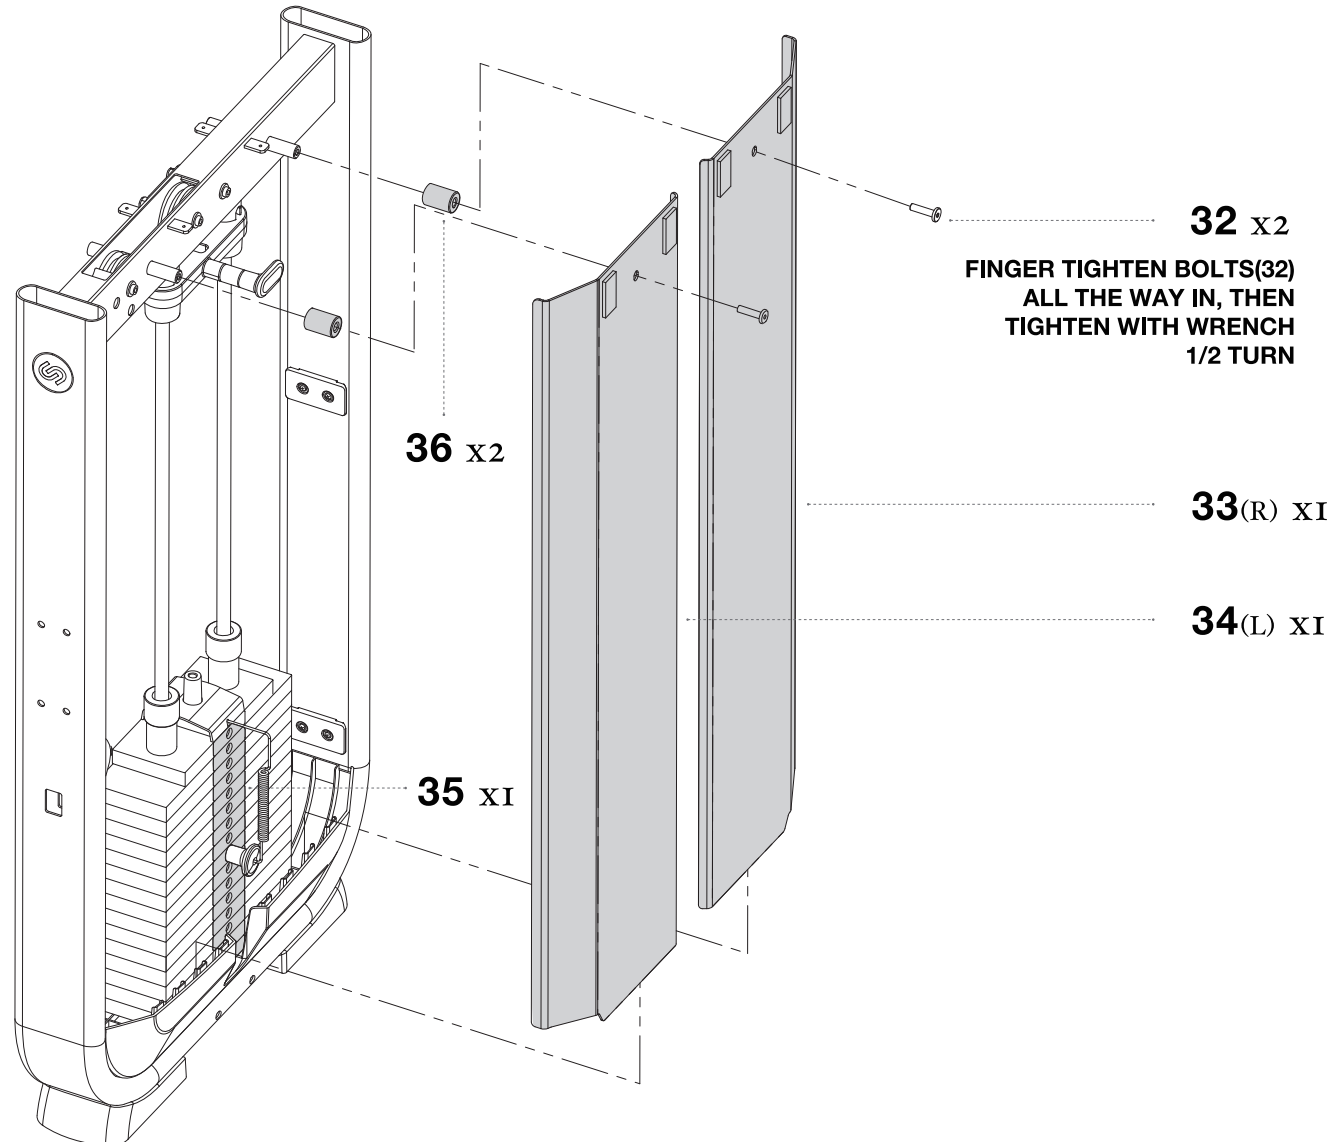

2.3 Assembly Guide

STEP 16


Some parts have been hidden for assembly clarity

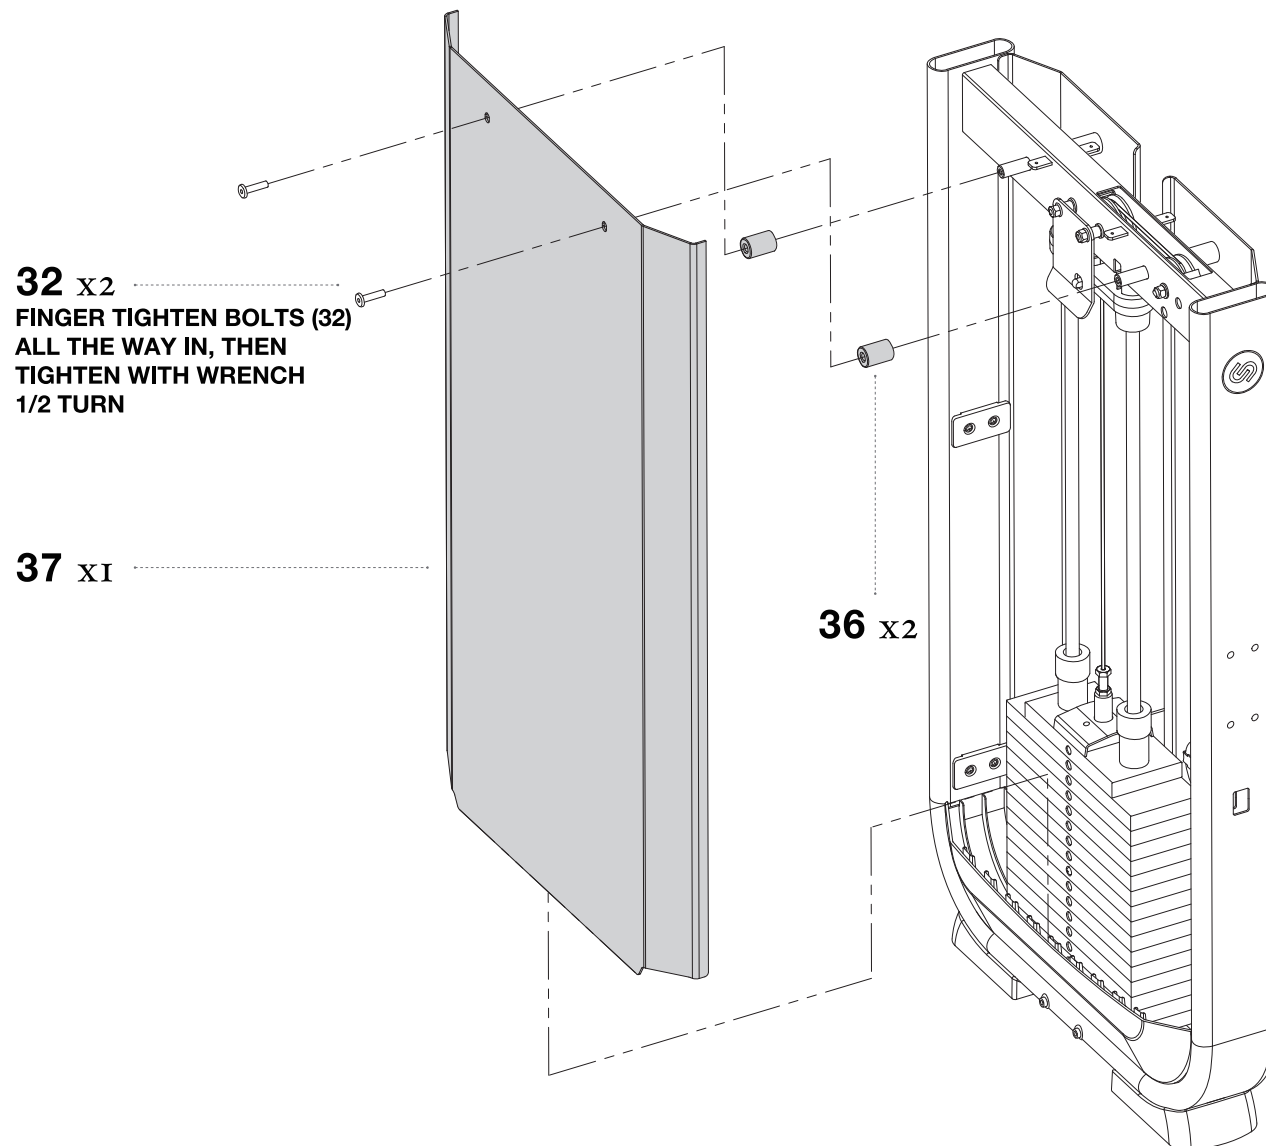

2.3 Assembly Guide

STEP 17

SECURELY tighten all bolt connections

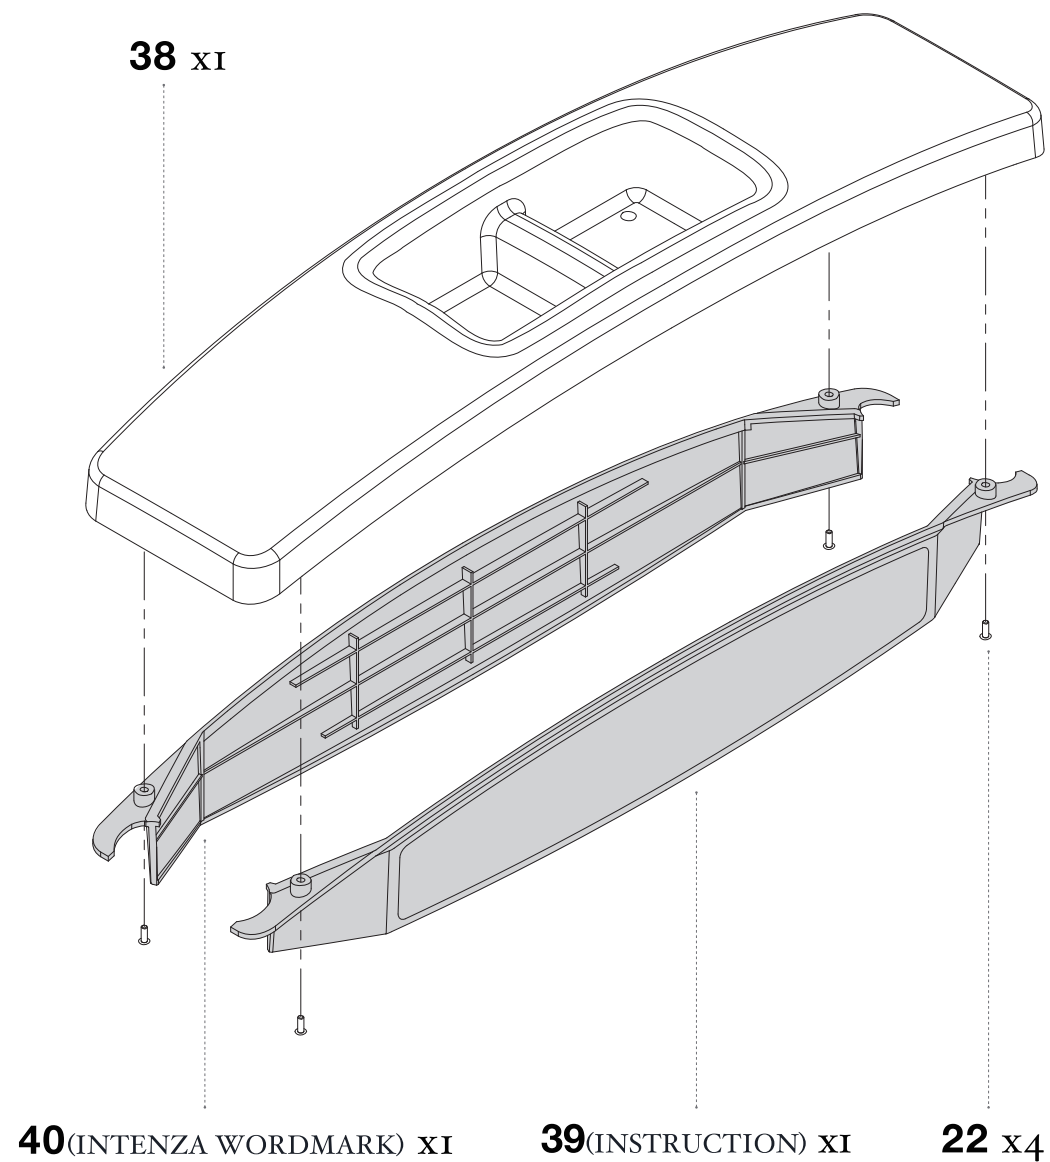


2.3 Assembly Guide

STEP 18

SECURELY tighten all bolt connections.


Assemble the cover as shown below.

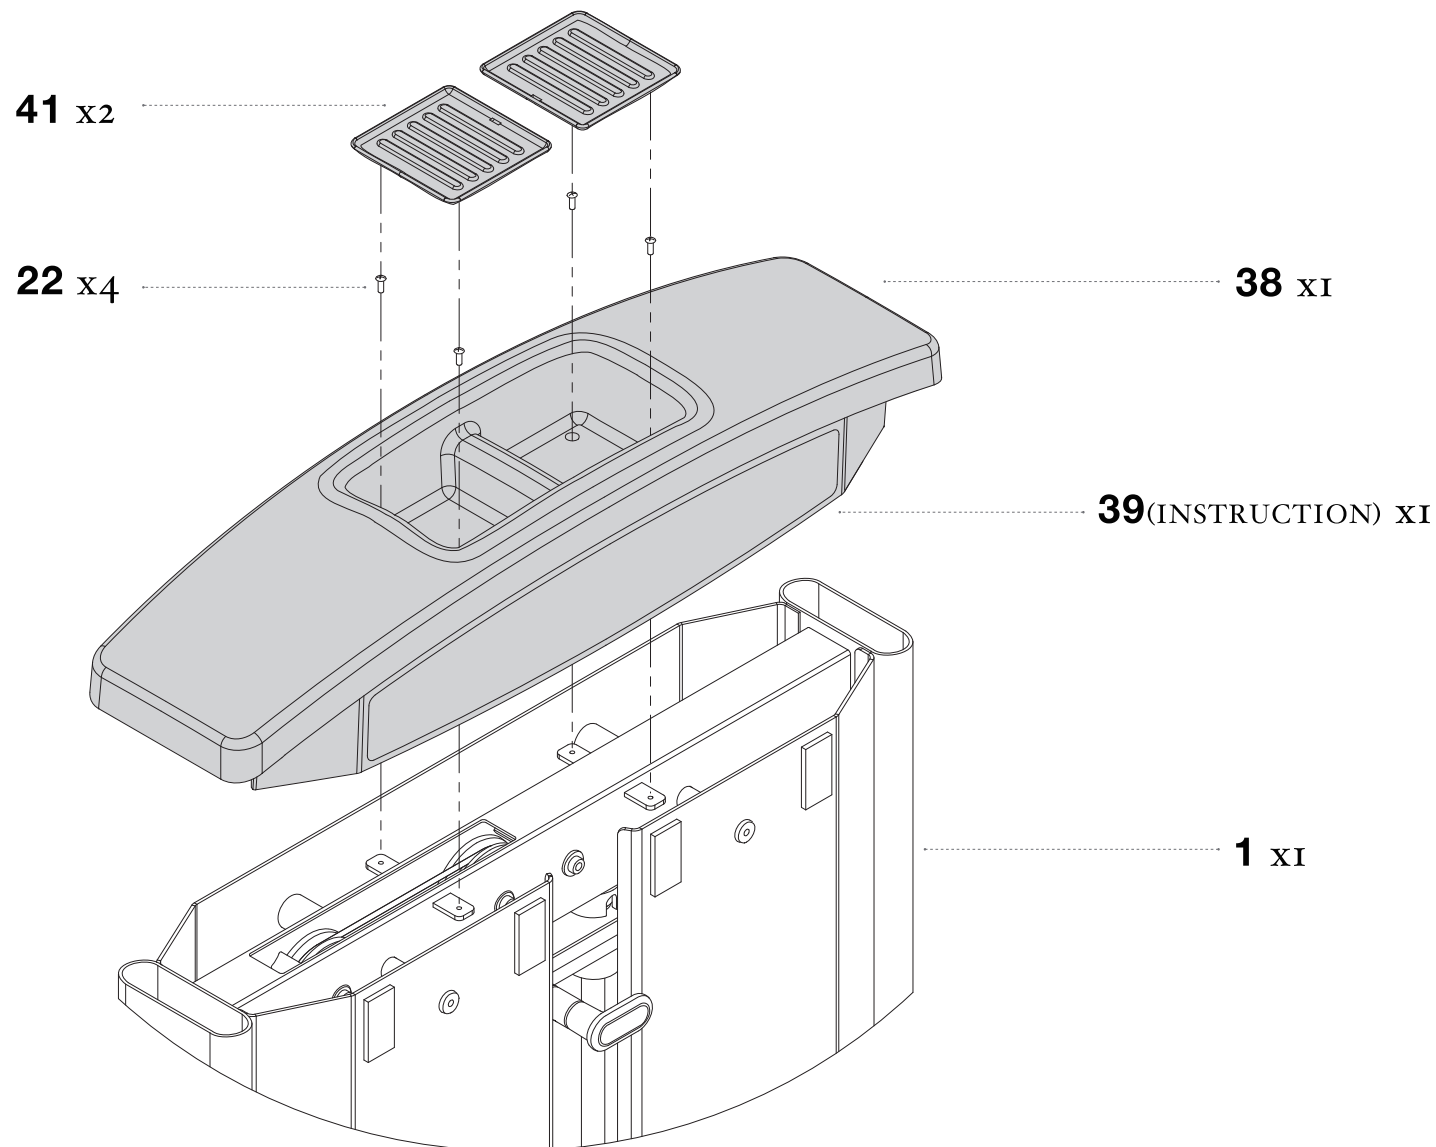

2.3 Assembly Guide

STEP 19


SECURELY tighten all bolt connections

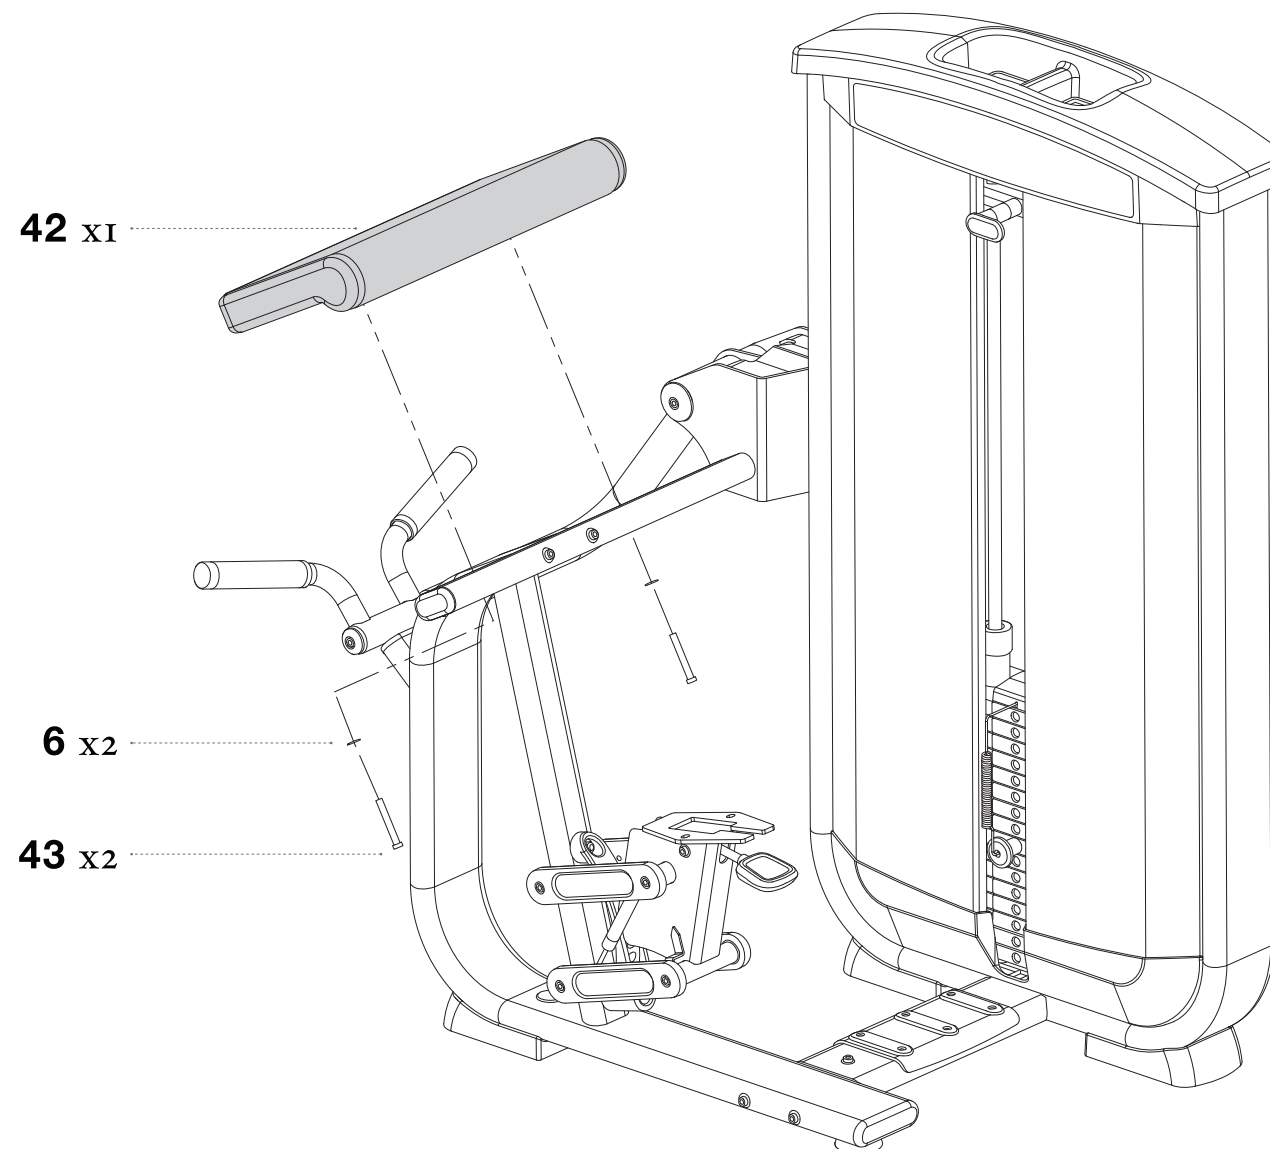

2.3 Assembly Guide

STEP 20

SECURELY tighten all bolt connections

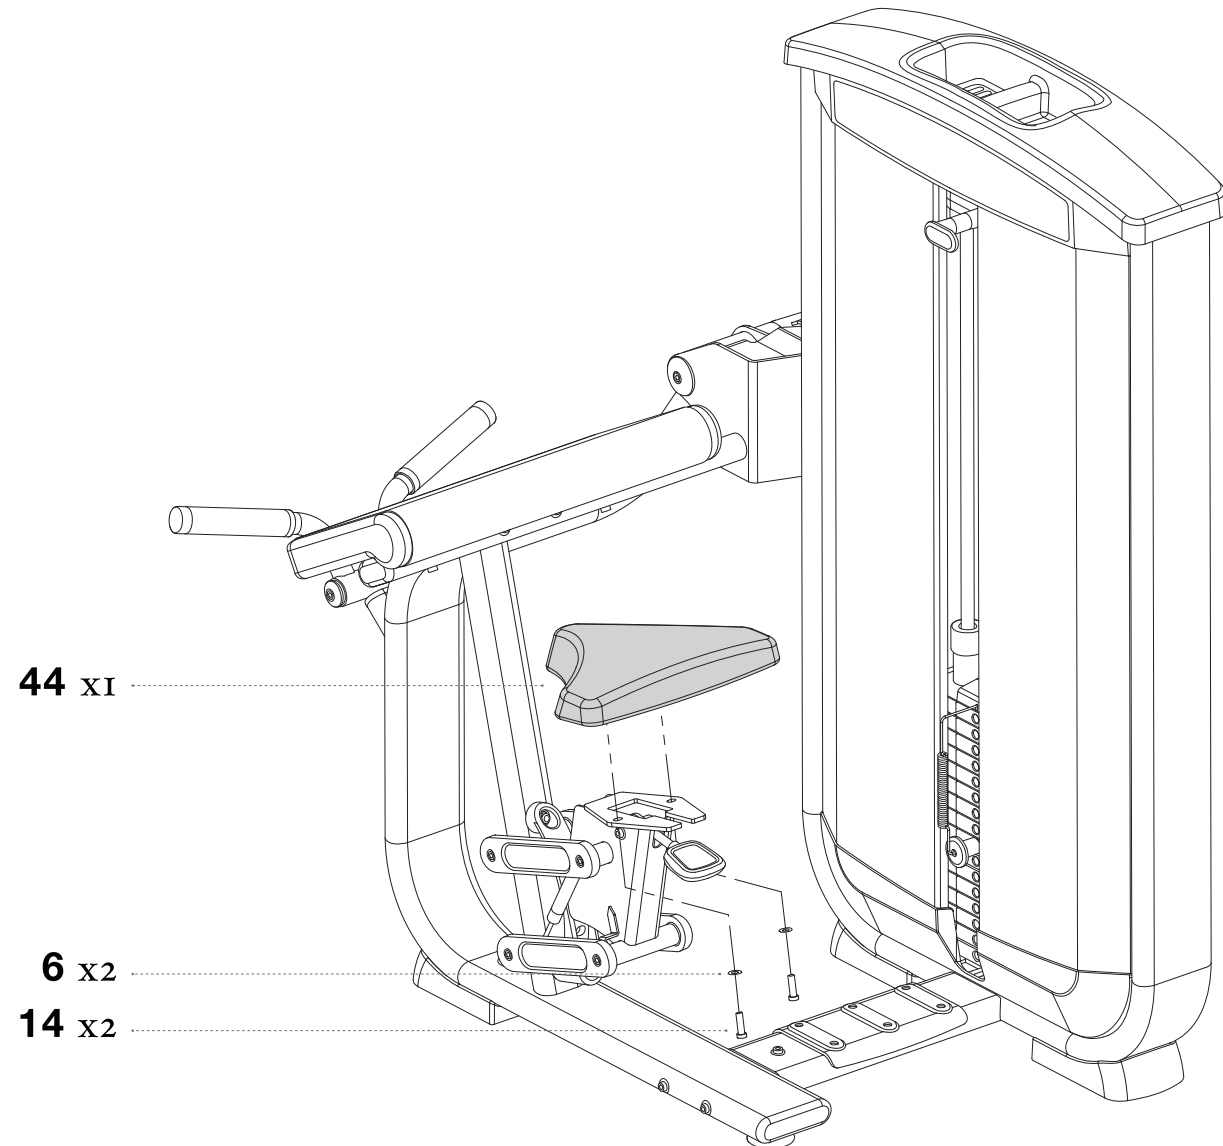

3. Using the Equipment

3.1 Important Safety Guidelines

CAUTION

Before using the equipment, read these instructions and all labels. Failure to do so may result in serious injury.

- Do not allow children, or those unfamiliar with the operation of this unit, on or near it.
- Before beginning any fitness program, see your physician for a thorough physical examination. Ask your physician for the appropriate target heart rate for your age and fitness level.
- If you feel pain, faintness, or dizziness, stop exercising immediately.

3.2 User's Guide

QUICK START GUIDE VIDEO

Use the built-in camera on your Phone to scan QR code for an educational exercise video tutorial.



TRAINING TIPS


- Keep your upper arms flat on the pad and maintain a neutral spine at all times.
- To maintain even pacing for each repetition, count to two in each direction as you move.

ARM CURL INTRODUCTION

The biceps brachii muscles serve a variety of functions, from helping you bend at the elbow to rotating your forearm to raising your arm overhead. Strong biceps will help you lift items with greater confidence, and are involved in a variety of sports and activities such as swimming, carrying boxes, tennis, and bowling.

ACTION

1. Select an appropriate weight.
2. Adjust seat height so elbows align with pivot point.
3. Grip handles firmly.
4. Keeping upper arms on pads, bend arms slowly to curled position.
5. Return weight with controlled movement to starting position.

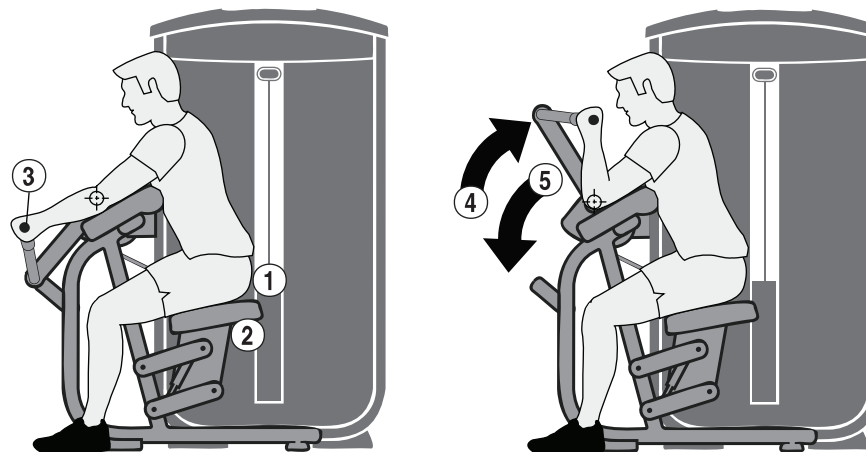

4. Care and Maintenance

4.1 Commercial Maintenance Schedule

INSPECT	DAILY	WEEKLY	MONTHLY	6 MONTHS	ANNUALLY
Cables for wear, tension, and proper connection.	•				
All adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys.	•				
All safety and instructional decals.	•				
All weight stack shrouds.	•				
All nuts and bolts and tighten if needed.		•			
All anti-slip surfaces and replace as needed.		•			
All accessory bars and handles.		•			
CLEAN					
Upholstery	•				
Guide rods and lubricate with a teflon lubricant			•		
LUBRICATE					
Pivot bearings and linear bearings				•	
REPLACE					
Cables					•

BEFORE YOU BEGIN

Preventative maintenance is crucial to maintaining the function and safety of this equipment. Your facility must establish written guidelines for preventative maintenance and keep written or online records of the maintenance performed on these products. As a minimum, the items presented in the Safety Instructions section of this document and the items that follow here, should be included in your maintenance program.

IMPORTANT Always purchase replacement parts and hardware from Intenza. Many parts are tested and manufactured specifically for Intenza commercial strength equipment. If you use parts not approved by Intenza, you could void the Intenza Limited Warranty. Use of parts not approved by Intenza may cause injury. Intenza recommends that maintenance technicians thoroughly read and understand the safety guidelines and maintenance procedures covered in this manual.

NOTE If the equipment requires assembly, please refer to 2.3 Assembly Guide Section in this manual.


TOOLS



1. ALLEN WRENCH, 4MM, 5MM, 6 MM



2. SCREWDRIVER



3. OPEN WRENCH/ADJUSTABLE WRENCH
17 MM, 19MM

4.2 Daily Inspection & Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each day before the equipment is subject to use. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Inspect cables for wear, tension, and proper connection (See 4.6 Cable Inspection & Maintenance Section) if equipped.
- Inspect all adjustment pins, weight stack pins, set screws, gas shocks, snap links, and pulleys if equipped.
- Inspect all safety and instructional decals.
- Inspect all weight stack shrouds if equipped.
- Verify that rubber hand grips are intact and secure.
- Verify that anti-skid foot grips are intact and secure.
- Verify that the weight stack selector pin is attached with the coiled lanyard to the top plate if equipped.

4.3 Weekly Inspection & Maintenance

The following items are critical to the safety of users and maintenance staff as well as ensuring the optimum performance of the machines. These inspections should be performed each week. Intenza is not responsible for performing or scheduling regular maintenance or inspections.

- Check entire length of cables and end fittings for any signs of wear if equipped. Replace immediately as required. (See 4.6 Cable Inspection & Maintenance Section).
- Verify that a minimum of 1 inch (25.4 mm) of the threaded portion of the cable bolt is threaded into the carriage and that the nut is tightened if equipped with a cable. (See 4.6 Cable Inspection & Maintenance Section).
- Perform a function test by placing the selector pin in the top plate and cycling the machine through the intended motion if equipped with a cable. Verify that the machine operates smoothly without binding. Select a moderate weight and repeat.
- Verify that each pulley rotates freely when performing the exercise if equipped with pulleys. A pulley that does not rotate will cause extreme cable wear and could lead to cable failure. Determine cause and remedy immediately.
- Verify that the adjustment pop pins retract easily and fully engage (when released) into each adjustment disc hole/slot. The pop pins are spring loaded so they should return to the engaged position when you release the knob.
- Verify that the adjustment pin disengages and engages freely when actuating the adjustment mechanism. Be sure that the adjustment pin inserts fully into the adjustment disc.
- Verify that all hardware is tightened and that associated frame members are secure. Apply a few small drops of a thread locking compound such as Loctite on any loose bolts.
- Inspect frame for integrity and function. Replace any components at the first sign of wear with only Intenza supplied parts.

4.4 Other Scheduled Preventive Maintenance

Intenza recommends that scheduled maintenance be performed by a qualified service technician. Please contact your dealer or visit www.intenzafitness.com to contact a local Intenza authorized service technician.

MONTHLY

Clean guide rods and lubricate with a Teflon grease if equipped with guide rods.

EVERY 6 MONTHS

Lubricate pivot bearing and linear bearings with lithium grease.

4.5 Clean The Equipment

CAUTION

Do not use any acidic cleaners. Doing so will weaken the paint or powder coatings and may void the Intenza Warranty. Never pour or spray liquids on any part of the equipment. Allow the equipment to dry completely before using.

CAUTION

If you determine that the equipment needs service, make sure that the equipment cannot be used inadvertently and ensure other users know that the machine needs service.

*To order parts or to contact a Intenza Authorized Service representative, please visit www.intenzafitness.com

Wipe all machines with a water dampened cloth and dry completely. This includes painted parts, chrome plated parts (except guide rods), plastic parts, and upholstered pads. It is important not to leave parts damp. This will increase the potential for corrosion to occur.

CAUTION

Certain anti—bacterial cleaners and other harsh cleaning agents can induce corrosion on the machine components. These solutions can also dry out and cause cracking and splitting on the upholstery.

HEAVY DUTY CLEANING

GUIDE RODS (IF EQUIPPED)	Clean and lubricate with a Teflon Spray. Be sure to coat the entire guide rod. Spraying lubricant into the cap plate bushings is also recommended
CHROMED ADJUSTMENT TUBES	Wipe away dust and dirt before applying a Teflon spray lubricant. Intenza recommends using TriFlow or a similar brand.
LINEAR BEARINGS	Clean the linear shaft and lubricate (as required) with Teflon based grease. Keeping linear bearings clean and lubricated is critical to long life and good performance
PAINTED FRAMES	If you have scuff marks, grease or a heavy dirt buildup on frame components, start with a mild soap solution or a diluted solution of a product such as Simple Green with a dilution of 32:1. If you cannot remove the marks using those methods, use a car polish/cleaner. DO NOT use solvents such as lacquer thinner, mineral spirits or acetone. For deeper scuff marks, use an automobile finish rubbing compound
UPHOLSTERY	For heavy duty cleaning, use a mild soap solution. This method should be sufficient in the majority of instances. In severe stain cases, you can use a solution of 5—10% household bleach diluted with water. Be sure to test an inconspicuous area first. DO NOT use chemical cleaners on the vinyl upholstery. You can also use a lanolin based hand cleaner to clean your upholstery. Wipe off after cleaning with a damp cloth and thoroughly dry
PLASTIC PARTS	Use a mild soap solution to clean dirt and grease marks
LABELS	Use a mild soap solution to clean dirt and grease marks
SHROUDS	Use a mild soap solution to clean dirt and grease marks

4.6 Cable Inspection & Maintenance

One of the most critical areas that require frequent inspection on any weight machine is the cable system that lifts the weight stack if the machine is equipped with those items. Sudden failure of a worn cable can, in some instances, result in injury to the user. It is the responsibility of the facility to inspect the cables frequently.

Cables are components that wear over time. This means that the more often a piece of equipment is used, the greater the likelihood that cable wear will occur.

Listed below are the areas of the cable that require inspection.

*Intenza recommends that all cables be replaced on an annual basis to maintain the safety of all users.

CABLE WEAR

Inspect all cables for any signs of wear. Pay close attention to the cable in the area of the end fittings and attachment points. Inspect the areas around the pulleys and/or cams. Shown below are examples of cables that exhibit signs of potential failure. If any of these conditions are apparent, the machine should immediately be taken out of service and repaired. Be sure to use only cables supplied by Intenza. DO NOT use cables that have fittings attached with hand crimp tools.

1. Twisted Cable (Zig—zag Pattern)



2. Break in the Cable Cover



3. Break/Bend in Cable




4. Tear in the Cable Cover



5. Stretched Cable Covering



6. Crimp Connector Dislodged

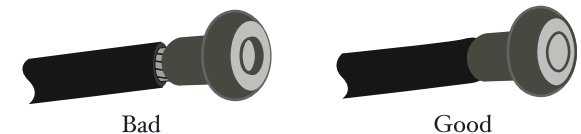

4.6 Cable Inspection & Maintenance

CAUTION



A minimum of 1 inch (25.4mm) of the threaded portion of the cable bolt must be threaded into the carriage.

No more than 1 inch (25.4 mm) of the threaded portion of the cable bolt should be visible.

CABLE TENSION


Ensure that the cables are adjusted to remove any slack using the threaded end fittings. These are normally located at the weight stack connection. Depending upon the machine, there may be multiple threaded fitting on multiple cables. You can determine if there is too much slack by performing the exercise. As you start to move a load arm or handle, the weight stack should lift immediately. If not, the cable tension needs to be adjusted.

To adjust the cable tension, loosen the cable nut that is located on the cable bolt connected to the top plate. Tighten the cable bolt until the top plate is barely lifted off of the first weight plate and then re-tighten the cable nut.

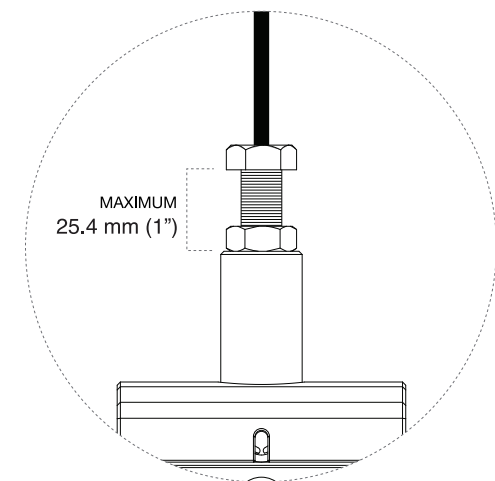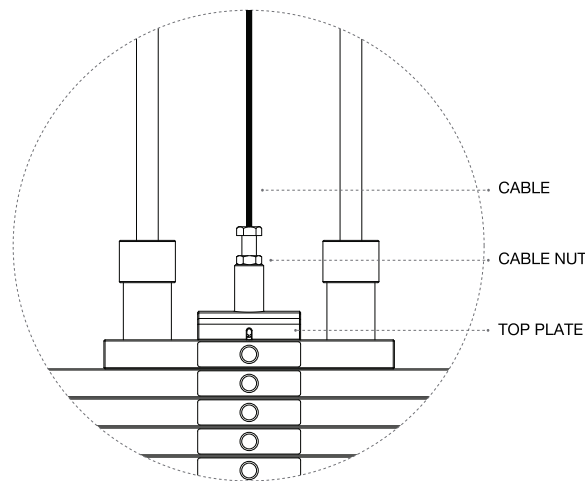

HANDLE FITTINGS (IF APPLICABLE)

Inspect the cable fittings where any handles are attached to the end of the cable. The fittings supplied with this machine are load rated snap-links. Ensure that the snap-link opens and closes easily and is fully engaged when closed. Replace the snap-link as needed.



© 2024 HealthStream Taiwan Inc.

No. 28, Jiaotuzai Boulevard, Liuying District, Tainan City 736, Taiwan

2024.10.18 Version 4.0

[INTENZAfitness.com](https://www.intenzafitness.com)

